









INSULATION KIT FOR HIGH HUMIDITY INSTALLATION MANUAL

UTZ-KXGA, UTZ-KXGB

- Before installation, be sure to read this installation manual and follow its instructions.
- Be sure to read and use together with the installation manual of main units included with indoor units.
- To guarantee the safety of operation, when attaching the Insulation or installing the Decoration panel or connecting the connector, be sure to cut off the power supply.
- This Insulation kit doesn't support the installation for Branched duct and Fresh air inlet kit.


Kit components

The following parts are included in the kit.

Name and Shape	Q'ty	Name and Shape	Q'ty	Name and Shape	Q'ty
Ins cabinet A 	1	Ins cabinet D 	1	Ins top plate B 	2
Ins cabinet B 	1	Ins cabinet E 	4	Ins top plate C 	1
Ins cabinet C 	1	Ins top plate A 	1	Ins hook 	4
				Insulation panel B 	2


1

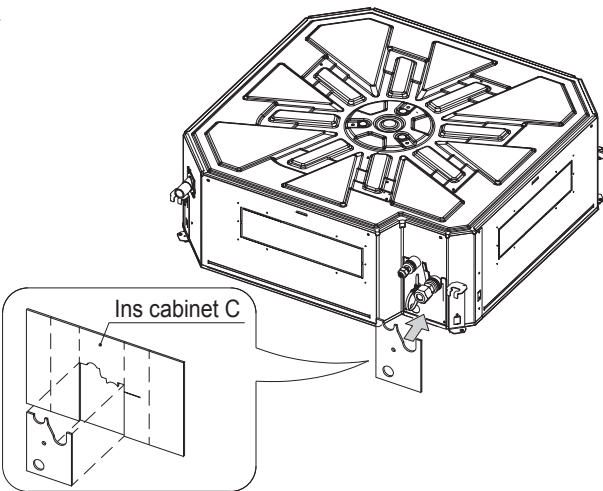Attach the Ins cabinet C onto the outside of the indoor unit.




2

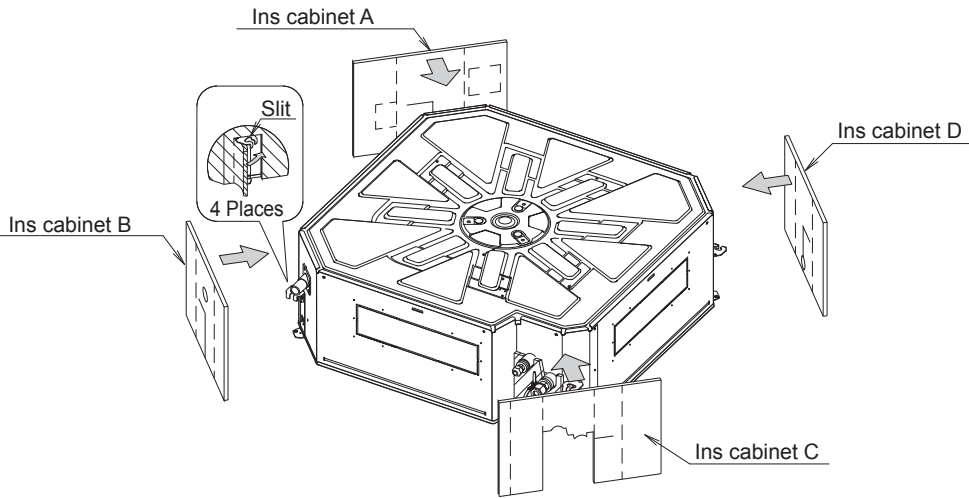Align the slits of Ins cabinet A, B, C and D to the related hooks, and then attach onto the outside of the indoor unit.




3

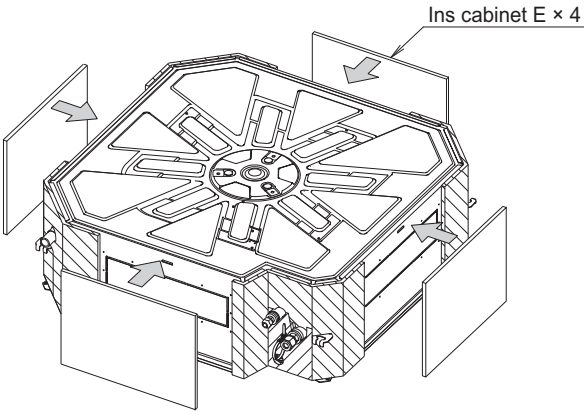Attach the Ins cabinet E onto the outside of the indoor unit.
At this time, make sure that there is no gap among the surrounding heat insulator.




4

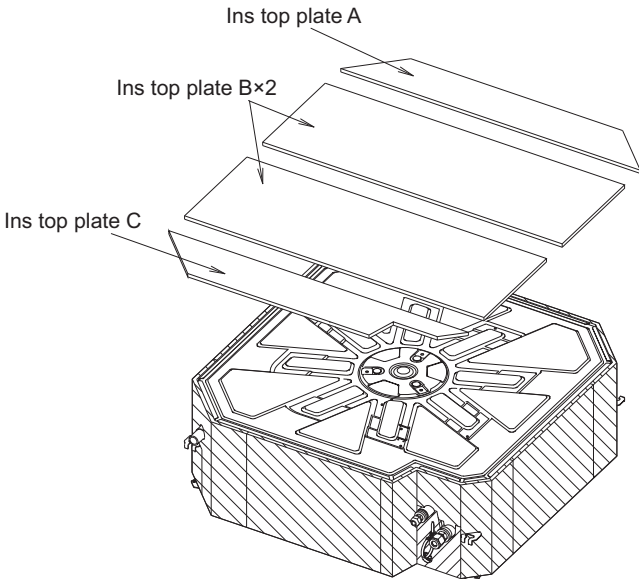Attach the Ins top plate A, B, and C without any gap.



5

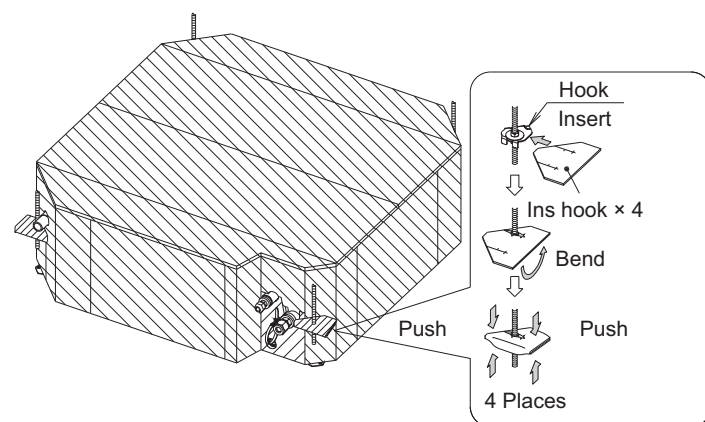After fixing the indoor unit, attach the Ins hook onto hook (4 places).



6

Paste the Insulation panel B as shown in the following figure.

