


Wall Mounted

Basic : ASYG07LLCC / ASYG09LLCC / ASYG12LLCC




Features

High efficient compact design

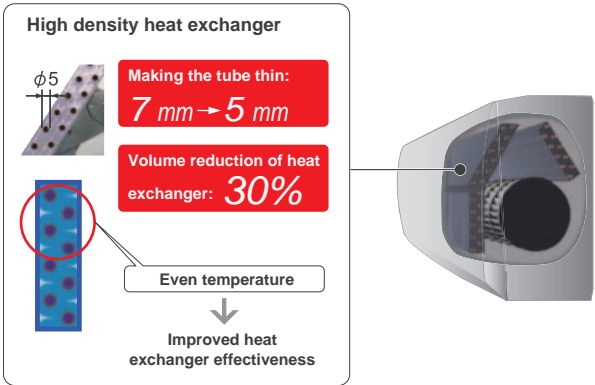

ON-OFF Programmable timer

You can set an integrated ON-OFF or OFF-ON timer suitable for your life style.
(Setting time: 0.5, 1, 1.5, 2, 2.5, -----9.5, 10, 11, 12 hours)

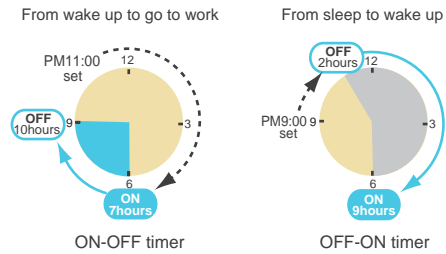

Super Quiet Operation

Top class low noise operation by new airflow construction. Our quiet operation makes the more comfortable environment in a bed room and a study room, etc.




Powerful operation


20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

Economy operation

Setting temp. is shifted by 1°C automatically.

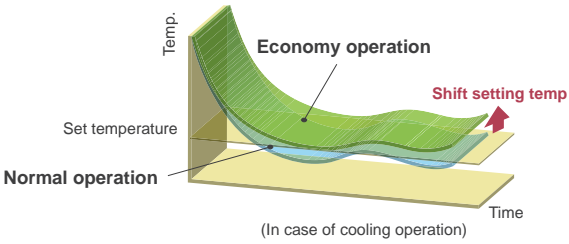

Low ambient operation



Optional parts

Remote Controller Holder: UTZ-RXLA

Specifications

Model No.	Indoor unit		ASYG07LLCC		ASYG09LLCC		ASYG12LLCC	
	Outdoor unit		AOYG07LLCC		AOYG09LLCC		AOYG12LLCC	
Power Source	V/Ø/Hz		230/1/50		230/1/50		230/1/50	
Capacity	Cooling	kW	2.0 (0.9-2.8)		2.5 (0.9-3.0)		3.4 (0.9-3.8)	
	Heating	kW	2.7 (0.9-3.6)		3.0 (0.9-3.8)		4.0 (0.9-5.0)	
Input Power	Cooling/Heating	kW	0.470/0.620		0.730/0.740		1.080/1.130	
EER	Cooling	W/W	4.26		3.42		3.15	
COP	Heating	W/W	4.35		4.05		3.54	
Pdesign	Cooling/Heating (@-10°C)	kW	2.0/2.2		2.5/2.3		3.4/3.2	
SEER	Cooling	W/W	6.70		6.90		6.60	
SCOP	Heating (Average)	W/W	4.00		4.00		3.80	
Energy Efficiency Class	Cooling		A++		A++		A++	
	Heating (Average)		A+		A+		A	
Running Current	Cooling/Heating	A	2.6/3.0		3.5/3.5		5.2/5.4	
Annual Energy Consumption	Cooling	kWh/a	104		127		180	
	Heating	kWh/a	770		805		1,179	
Moisture Removal		l/h	1.0		1.3		1.8	
Sound Pressure (Cooling)	Indoor	H/M/L/Q	43/38/33/22		43/38/33/22		43/38/33/22	
	Outdoor	High	47		47		50	
Sound Power (Cooling)	Indoor	High	59		59		59	
	Outdoor	High	61		61		65	
Airflow Rate (High)	Indoor / Outdoor	m³/h	720/1,670		720/1,670		720/1,830	
		mm	262x820x206		262x820x206		262x820x206	
Net Dimension H x W x D	Indoor	kg(lbs)	7.0 (15)		7.0 (15)		7.0 (15)	
		mm	535x663x293		535x663x293		535x663x293	
	Outdoor	kg(lbs)	24 (53)		24 (53)		26 (57)	
Piping Connections (Small / Large)		mm	6.35/9.52		6.35/9.52		6.35/9.52	
Drain Hose Diameter (I.D./O.D.)		mm	13.8/15.8 to 16.7		13.8/15.8 to 16.7		13.8/15.8 to 16.7	
Max Pipe Length (Pre-Charge)		m	20 (15)		20 (15)		20 (15)	
Max Height Difference			15		15		15	
Operation Range	Cooling	°CDB	-10 to 43		-10 to 43		-10 to 43	
	Heating	°CDB	-15 to 24		-15 to 24		-15 to 24	
Refrigerant (Global Warming Potential)			R410A (1,975)		R410A (1,975)		R410A (1,975)	

Dimensions Models : ASYG07LLCC / ASYG09LLCC / ASYG12LLCC

(Unit : mm)

