

INDOOR UNIT

1. CASSETTE TYPE :

AU * A12LAL

AU * F12LAL

AU * A14LAL

AU * F14LAL

1. FEATURE

■ MODEL :

INDOOR UNIT	OUTDOOR UNIT	
AU* A12LAL	AO* A12LACL	AO* B12LACL
AU* F12LAL	AO* A12LALL	AO* B12LALL
AU* A14LAL	AO* A14LACL	AO* B14LACL
AU* F14LAL	AO* A14LALL	AO* B14LALL



■ FEATURES

● Energy saving

- All DC design
- Heat exchange efficiency increased and larger air flow by adoption of new type turbo fan


● Advancement in comfort

- Quiet operation was realized by adoption of new type turbo fan
- Improvement of air stream

● Improvement of installation & maintenance

- COMPACT DESIGN

Fits the European size ceiling.

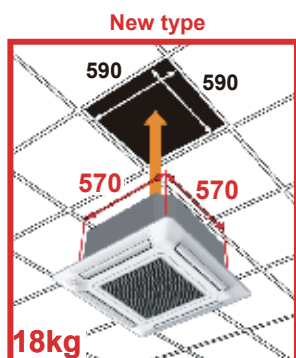

● Easy maintenance

① Maintenance of fan motor and fan


Maintenance of fan motor and fan can be done easily after taking off the panel, since bell-mouth can be removed easily

A : Fan motor

B : 2 stage turbo fan

C : Bell-mouth

D : Panel

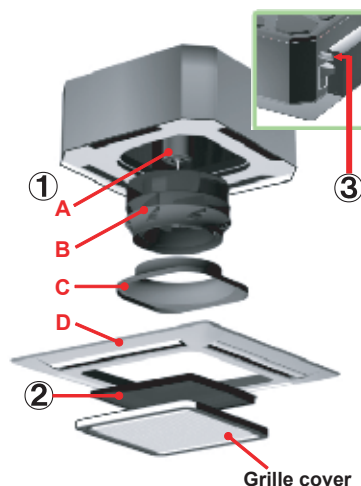

② Long life filter

: standard equipment


③ Adaptation of transparent drainage parts

Easy check of operation of drain-up kit when you install

● Easy installation

New type

Easy setting by wireless or wired remote controller

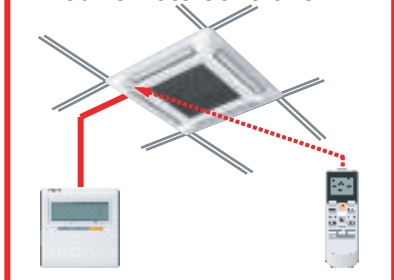

■ FUNCTION SETTING

● Outlet direction selection

- Performs operation matched to the number of outlets when 4 directions are unnecessary and outlets are blocked when the ceiling cassette is installed in a corner, etc.

4-way direction 3-way direction




4-way direction mode: Set when there are 4 outlets (shipped state).

3-way direction mode: Set when there are 3 outlets.

● Ceiling switching function

Air reaches sufficiently up to 3m height, even it is compact cassette type.

Also delivers air to high ceilings by selecting the mode and raising the air flow according to the height of the ceiling.

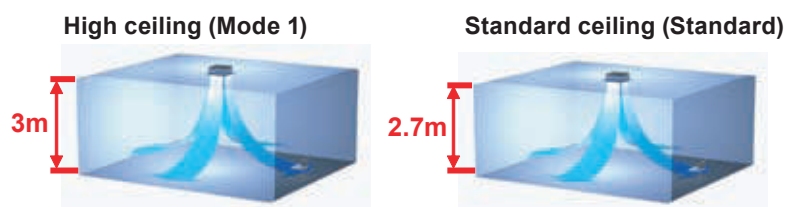

Standard...Operates at normal air flow.

Mode 1 ...Air flow becomes greater than normal.

● Filter sign

The indoor unit has sign to inform the user that it is time to clean the filter

● Cooling room temperature correction

● Heating room temperature correction

● Auto restart

The units restart automatically when the current was returned even when there was a power interruption during operation.

● Room temperature sensor switching

Switches from room temperature judgment by room temperature sensor attached to indoor unit body to room temperature judgment by room temperature sensor attached to wired remote controller.

● Economy operation

The power consumption can be reduced.

Powerful mode ...Standard

Soft mode ...Performs operation which reduces the power consumption

2. REMOTE CONTROLLER

WIRELESS REMOTE CONTROLLER

■ FEATURES



- * Four kinds of timer setup (ON / OFF / PROGRAM / SLEEP) are possible.
- * Four kinds of timers. Easy operation.
- * Easy to change transmission code (4 patterns) by button operation.

● Simple function setting

Setting of the air conditioner selection function is performed by remote controller.

● Built-in timers

Select from four different timer programs (On/Off/Program/Sleep).

● Program timer


The program timer operates the ON and OFF timer once within a 24 hour period.

● Sleep timer

The sleep timer function automatically corrects the temperature thermostat setting according to the time setting to prevent excessive cooling and heating while sleeping.


Cooling operation/dry operation

When the sleep timer is set, the set temperature automatically rises 1 °C every hour. The set temperature can rise up to a maximum of 2 °C.

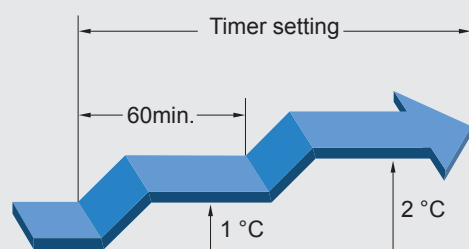


Heating operation

When the sleep timer is set, the set temperature automatically drops 1 °C every 30 minutes. The set temperature can drop to a maximum of 4 °C.

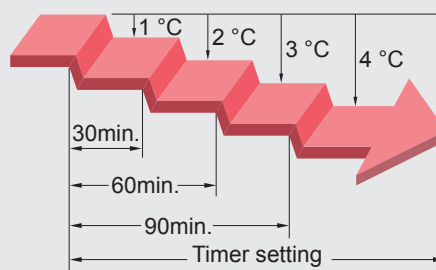


● Switching remote control unit signal code

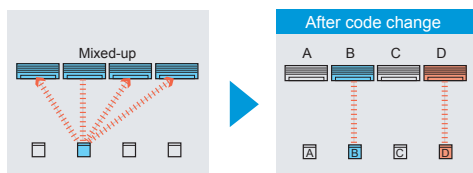


- Code selector switch eliminates unit being wrongly switched.
(Up to 4 codes can be set.)

FUNCTIONS

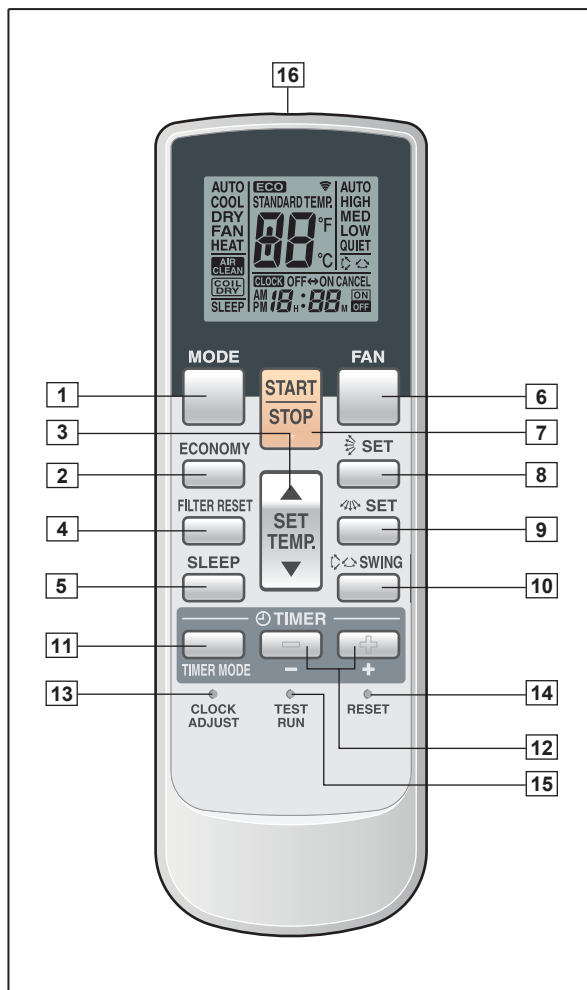

- 1 **MODE button**
Selects the operating mode (AUTO, HEAT, FAN, COOL, DRY).
/Start / end R.C. custom code change. (Max 4 types)
- 2 **Economy button**
- 3 **Set temp. button (▲/▼)**
Set remote controller custom code buttons
Sets the indoor temp./ Sets R.C. custom code.
- 4 **Filter reset button**
- 5 **Sleep button**
Pressed to select sleep timer.
- 6 **Fan button**
Selects the fan speed (AUTO, QUIET, LOW, MED, HIGH).
- 7 **START/STOP button**
Pressed to start and stop operation.
- 8 **Set button (Vertical)**
Air flow direction vertical set button.
- 9 **Set button (Horizontal)**
Air flow direction horizontal set button.
- 10 **Swing button**
Air flow direction swing button.
- 11 **Timer mode button**
Pressed to select the timer mode. (OFF TIMER, ON TIMER, PROGRAM TIMER, TIMER RESET)
- 12 **Timer set (+ / -) button**
Sets the current time and on-off time.
- 13 **Clock adjust button**
Sets the current time.
- 14 **Reset button**
Used when replacing batteries.
- 15 **Test run button**
Used when testing the air conditioner after installation.

Display panel

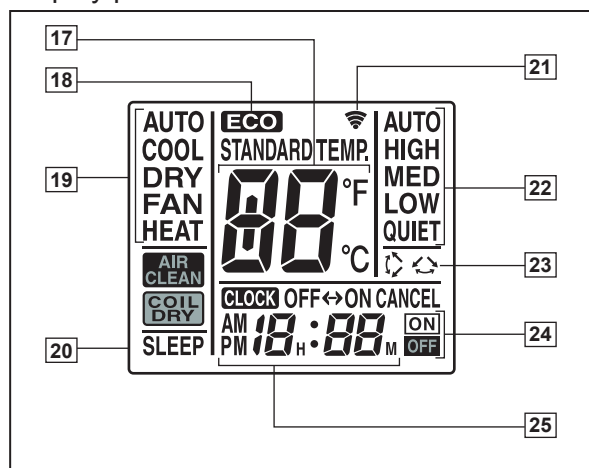

- 16 **Signal transmitter**
- 17 **Temperature set display**
- 18 **Economy display**
- 19 **Operating mode display**
- 20 **Sleep display**
- 21 **Transmit indicator**
- 22 **Fan speed display**
- 23 **Swing display**
- 24 **Timer mode display**
- 25 **Clock display**

Functions will be different due to type of indoor unit.
For details, please see operation manual.

SPECIFICATION

SIZE (H x W x D mm)	170 x 56 x 19
WEIGHT (g)	85 (w/o batteries)
ACCESSORY	Holder

3. SPECIFICATIONS

Type					CASSETTE MODEL			
					INVERTER HEATPUMP			
Model name					AU * A12LAL, AU * F12LAL		AU * A14LAL, AU * F14LAL	
					AO * A12LACL, AO * A12LALL		AO * A14LACL, AO * A14LALL	
Power source					230V ~ 50Hz			
Available voltage range					198-264V ~ 50Hz			
European energy label				Cooling	A		A	
				Heating	A		A	
Capacity	Cooling	Rated	kW	3.50		4.30		
			BTU/h	11950		14650		
		Min.-Max.	kW	0.90 - 4.40		0.90 - 5.40		
			BTU/h	3100 - 15000		3100 - 18400		
	Heating	Rated	kW	4.10		5.00		
			BTU/h	14000		17050		
		Min.-Max.	kW	0.90 - 5.70		0.90 - 6.50		
			BTU/h	3100 - 19400		3100 - 22100		
Input power	Cooling	Rated	kW	1.05		1.33		
		*Max.		1.73		2.07		
	Heating	Rated		1.11		1.34		
		*Max.		2.30		2.88		
Current	Cooling	Rated	A	4.6		5.8		
		*Max.		7.5		9.0		
	Heating	Rated		4.9		5.9		
		*Max.		10.0		12.5		
EER		Cooling	kW/kW	3.33		3.21		
COP		Heating		3.69		3.71		
Moisture removal				l/h (pints/h)	1.2 (2.1)		1.5 (2.6)	
Fan	Airflow rate	Cooling	High	m³/h	600		680	
			Med		530		580	
			Low		470		490	
			Quiet		410		410	
		Heating	High		600		800	
			Med		530		680	
			Low		470		580	
			Quiet		410		450	
	Type × Q'ty			Turbo × 1				
	Motor output			W	54			
Sound pressure level		Cooling	High	dB(A)	37		38	
			Med		34		34	
			Low		30		30	
			Quiet		27		27	
		Heating	High		37		43	
			Med		34		38	
			Low		31		34	
			Quiet		29		30	
Heat exchanger type		Dimensions (H × W × D)		mm	210 × 1310 × 13.3 210 × 1250 × 13.3		210 × 1310 × 13.3 210 × 1250 × 13.3	
		Fin pitch			1.20		1.20	
		Rows x Stages			2X10		2X10	
		Pipe type			Copper tube			
		Fin type			Aluminium			
Enclosure		Material		PS				
		Colour		WHITE Approximate colour of MUNSELL N 9.25/				
Dimensions (H×W×D)	Net	Unit	mm	245 × 570 × 570				
		Panel		49 x 700 x 700				
	Gross	Unit		265 x 730 x 625				
		Panel		120 x 765 x 755				
Weight	Net	Unit	kg(lb.)	15 (33)		15 (33)		
		Panel		2.6 (5.7)				
	Gross	Unit		18 (40)		18 (40)		
		Panel		4.5 (10.0)				
Connection pipe	Size	Liquid	mm	φ 6.35 (φ 1/4 in.)				
		Gas		φ 9.52(φ 3/8 in.)		φ 12.70(φ 1/2 in.)		
	Method		Flare					
Operation range		Cooling	°C	18 to 32				
			%RH	80 or less				
		Heating	°C	30 or less				
Remote controller type					WIRELESS			
Drain pipe	Material			ABS				
	Size			mm	Outer diameter : 25.4 / Inner diameter : 19.4			

Note :

Specifications are based on the following conditions.

Cooling : Indoor temperature of 27 °CDB / 19 °CWB and outdoor temperature of 35 °CDB/24 °CWB.

Heating : Indoor temperature of 20 °CDB / 15 °CWB and outdoor temperature of 7 °CDB/6 °CWB.

Pipe length : 7.5 m, Height difference : 0 m.(Outdoor unit - Indoor unit)

Ceiling mode : Standard

*The maximum current and the maximum input value are the maximum values when operated within the operation range (temperature).

Type					CASSETTE MODEL				
					INVERTER HEATPUMP				
Model name					AU * A12LAL, AU*F12LAL AO * B12LACL, AO*B12LALL		AU * A14LAL, AU*F14LAL AO * B14LACL, AO*B14LALL		
Power source					230V~ 50Hz				
Available voltage range					198-264V ~ 50Hz				
European energy label				Cooling	B		B		
				Heating	B		B		
Capacity	Cooling	Rated	kW	3.50		4.30			
			BTU/h	11950		14650			
		Min.-Max.	kW	0.90 - 4.30		0.90 - 5.20			
			BTU/h	3100 - 14650		3100 - 17750			
	Heating	Rated	kW	4.10		5.00			
			BTU/h	14000		17050			
		Min.-Max.	kW	0.90 - 5.50		0.90 - 6.30			
			BTU/h	3100 - 18750		3100 - 21500			
Input power	Cooling	Rated	kW	1.11		1.41			
		*Max.		1.73		2.07			
	Heating	Rated		1.17		1.42			
		*Max.		2.30		2.88			
Current	Cooling	Rated	A	4.9		6.2			
		*Max.		7.5		9.0			
	Heating	Rated		5.1		6.2			
		*Max.		10.0		12.5			
EER		Cooling	kW/kW	3.15		3.05			
COP		Heating		3.50		3.52			
Moisture removal				l/h (pints/h)	1.2 (2.1)		1.5 (2.6)		
Fan	Airflow rate	Cooling	High	m³/h	600		680		
			Med		530		580		
			Low		470		490		
			Quiet		410		410		
		Heating	High		600		800		
			Med		530		680		
			Low		470		580		
			Quiet		410		450		
	Type × Q'ty			Turbo × 1					
	Motor output			W	54				
Sound pressure level		Cooling	High	dB(A)	37		38		
			Med		34		34		
			Low		30		30		
			Quiet		27		27		
		Heating	High		37		43		
			Med		34		38		
			Low		31		34		
			Quiet		29		30		
Heat exchanger type		Dimensions (H × W × D)		mm	210 × 1310 × 13.3 210 × 1250 × 13.3		210 × 1310 × 13.3 210 × 1250 × 13.3		
		Fin pitch			1.20		1.20		
		Rows x Stages			2X10		2X10		
		Pipe type			Copper tube				
		Fin type			Aluminium				
Enclosure		Material		PS					
		Colour		WHITE Approximate colour of MUNSELL N 9.25/					
Dimensions (H×W×D)	Net	Unit	mm	245 × 570 × 570					
		Panel		49 x 700 x 700					
	Gross	Unit		265 x 730 x 625					
		Panel		120 x 765 x 755					
Weight	Net	Unit	kg(lb.)	15 (33)		15 (33)			
		Panel		2.6 (5.7)					
	Gross	Unit		18 (40)		18 (40)			
		Panel		4.5 (10.0)					
Connection pipe	Size	Liquid	mm	φ6.35 (φ1/4 in.)					
		Gas		φ9.52(φ3/8 in.)		φ12.70(φ1/2 in.)			
	Method		Flare						
Operation range		Cooling	°C	18 to 32					
			%RH	80 or less					
		Heating	°C	30 or less					
Remote controller type				WIRELESS					
Drain pipe	Material			ABS					
	Size			mm					
				Outer diameter : 25.4 / Inner diameter : 19.4					

Note :

Specifications are based on the following conditions.

Cooling : Indoor temperature of 27 °CDB / 19 °CWB and outdoor temperature of 35 °CDB/24 °CWB.

Heating : Indoor temperature of 20 °CDB / 15 °CWB and outdoor temperature of 7 °CDB/6 °CWB.

Pipe length : 7.5 m, Height difference : 0 m.(Outdoor unit - Indoor unit)


Ceiling mode : Standard

*The maximum current and the maximum input value are the maximum values when operated within the operation range (temperature).

4. DIMENSIONS



■ MODEL : AU*A12L, AU*F12L, AU*A14L, AU*F14L

(Unit : mm)

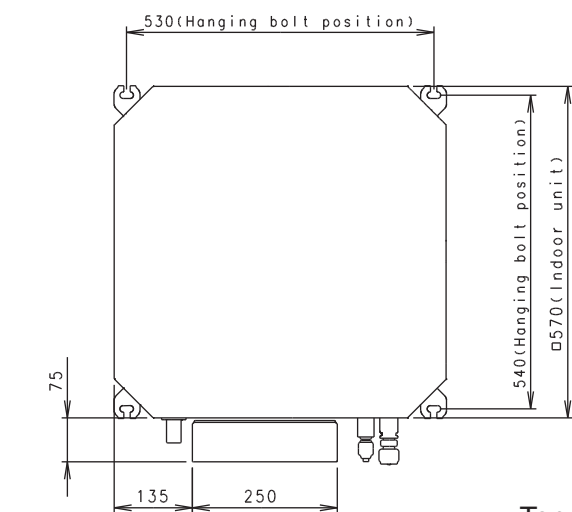


Top view


• Decoration panel mounting state

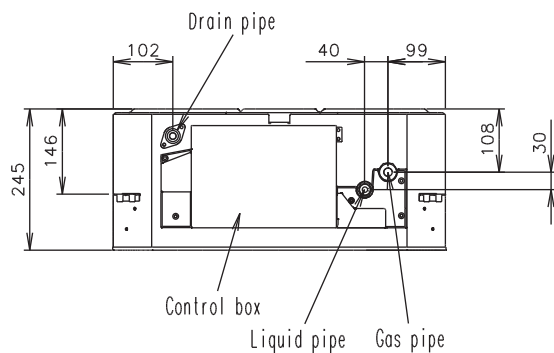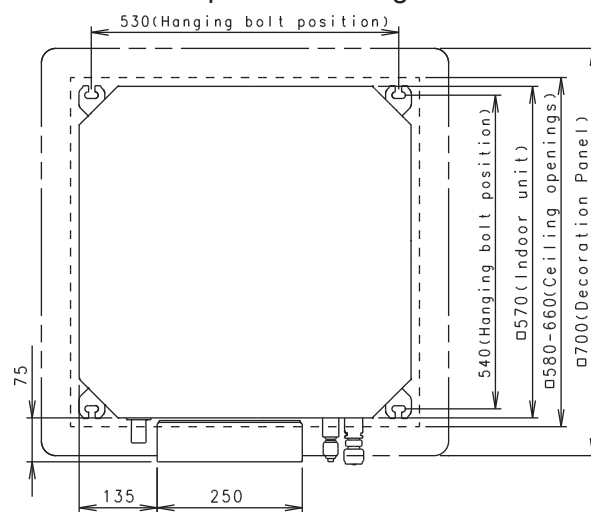


Side view

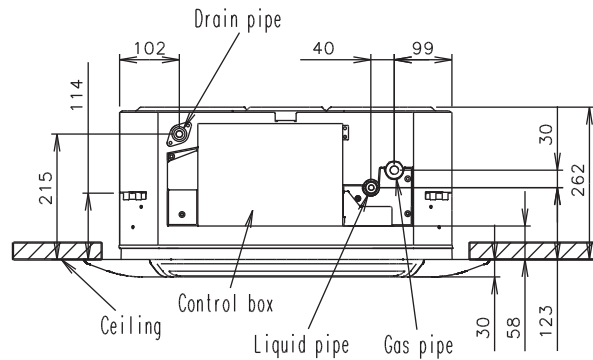

■ MODEL : UTG-UF*A-W, UTG-UF*B-W

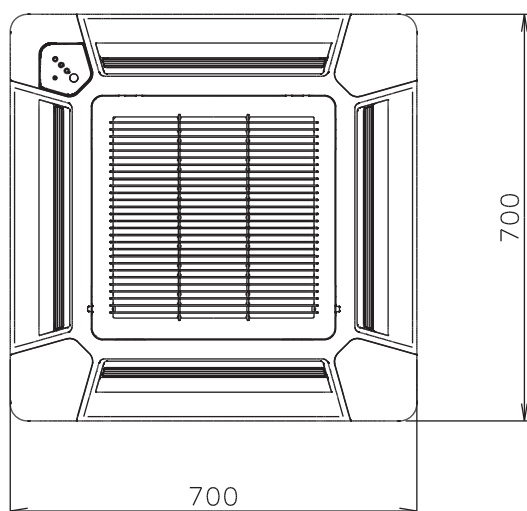


Bottom view (Panel)

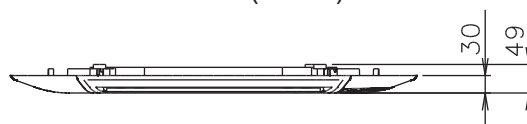

Side view


■ INSTALLATION PLACE

(Unit : mm)

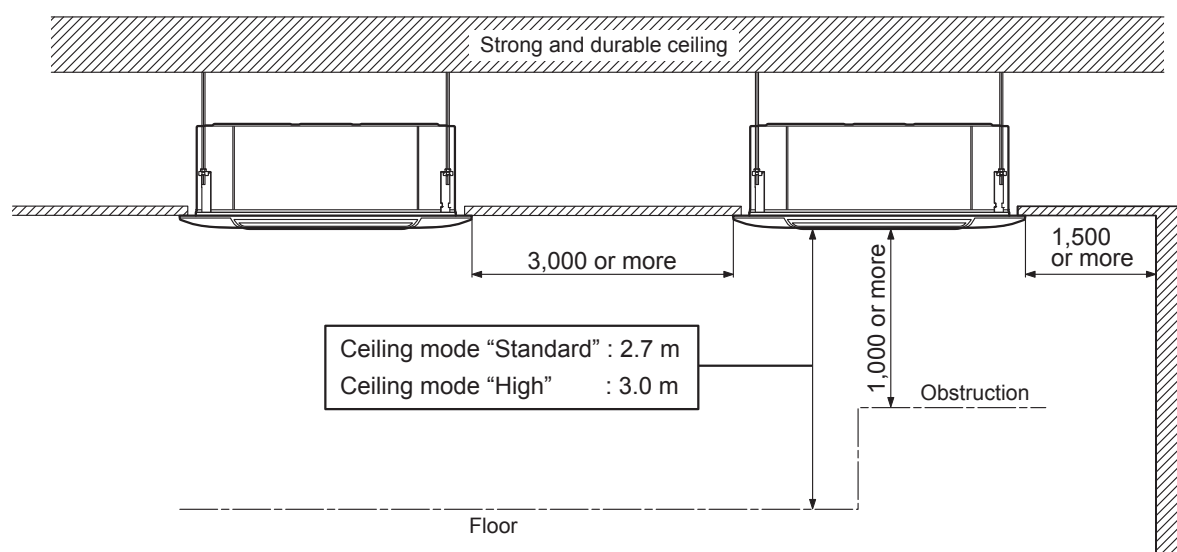

● 3-way directions setting

(Unit : mm)

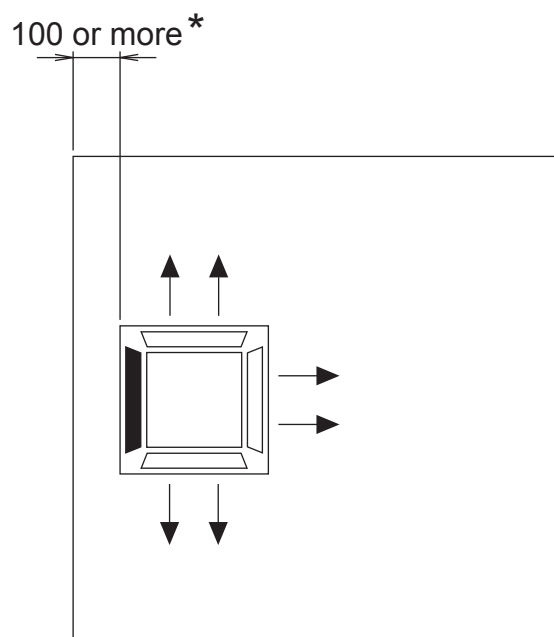


To set "3-way directions", the air outlet shutter plate(UTR-YDZA or UTR-YDZB) sold separately must be installed and "outlet-direction" switched to "3-way" by remote controller.

*When installing the indoor unit, be careful about the maintenance hole

5. WIRING DIAGRAMS

■ MODEL : AU*A12L, AU*F12L, AU*A14L, AU*F14L

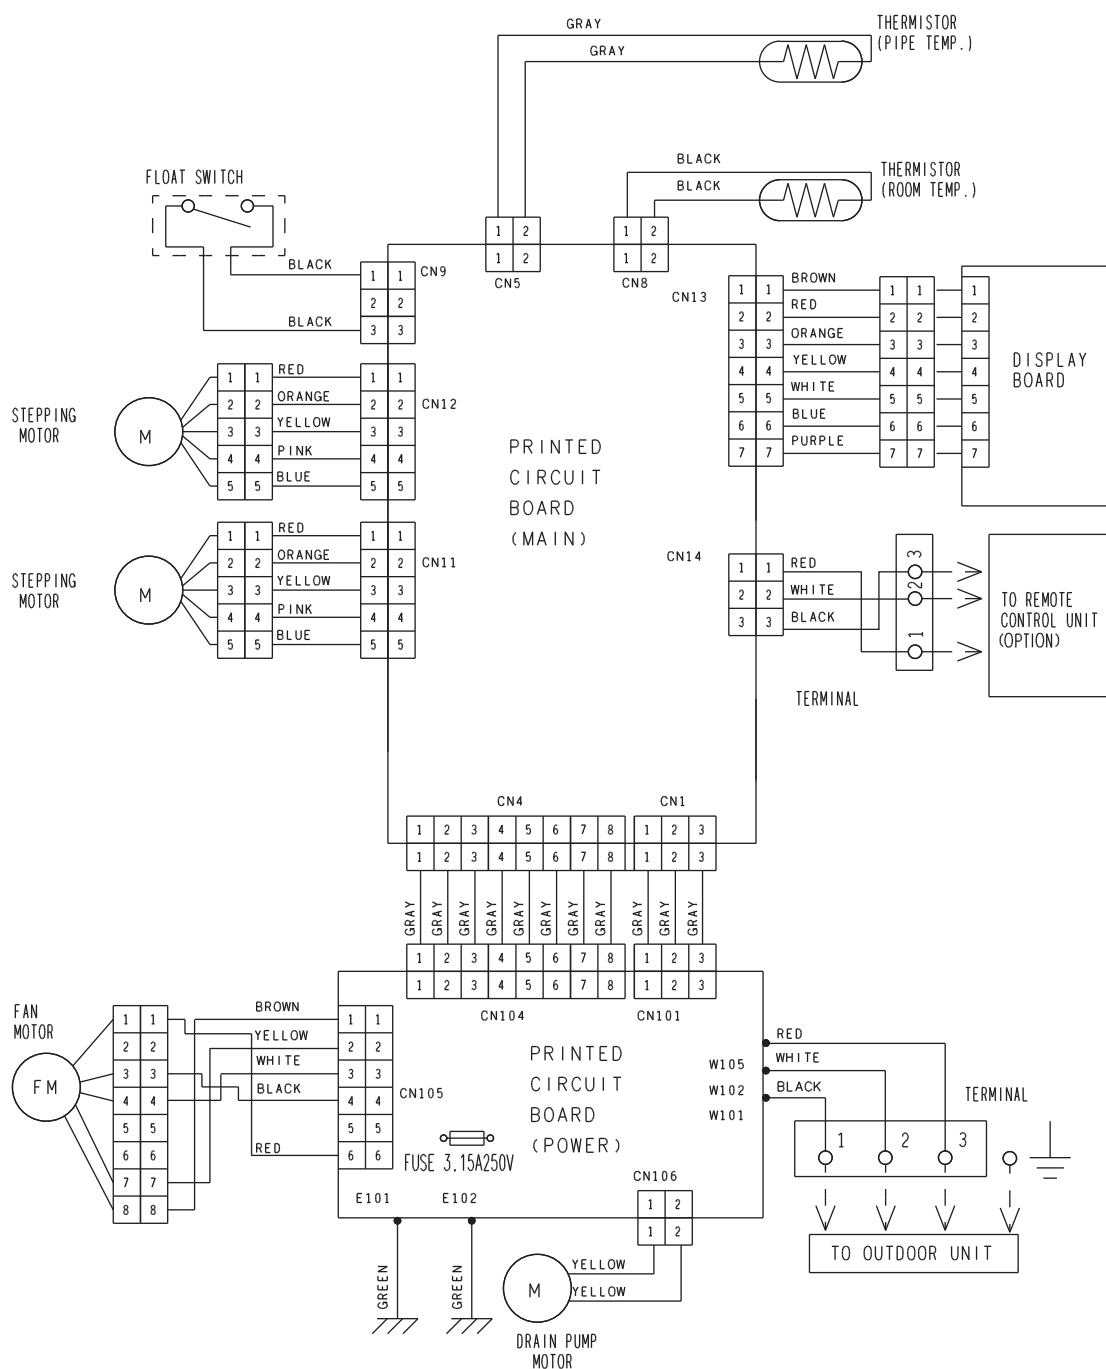

6. CAPACITY TABLE

6-1. COOLING CAPACITY

This table is created using the maximum capacity.

■ MODEL : AU*A12L, AU*F12L / AO*A12L

AFR	10.0
-----	------

		Indoor temperature																				
		18			21			23			25			27			29			32		
		12			15			16			18			19			21			23		
Outdoor temperature	°CDB	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
	-10	3.47	3.22	0.29	3.87	3.24	0.30	4.00	3.52	0.30	4.26	3.53	0.30	4.40	3.81	0.30	4.66	3.80	0.31	4.92	4.05	0.31
	0	3.29	3.07	0.49	3.67	3.09	0.50	3.79	3.36	0.50	4.05	3.37	0.51	4.17	3.64	0.51	4.42	3.63	0.51	4.67	3.86	0.52
	5	3.30	3.07	0.47	3.67	3.09	0.48	3.80	3.36	0.48	4.05	3.37	0.49	4.17	3.64	0.49	4.42	3.63	0.50	4.67	3.86	0.50
	10	3.30	3.07	0.44	3.67	3.09	0.45	3.80	3.36	0.45	4.05	3.37	0.45	4.17	3.64	0.46	4.42	3.63	0.46	4.67	3.86	0.46
	15	3.19	2.99	0.53	3.56	3.01	0.54	3.68	3.27	0.54	3.92	3.28	0.55	4.04	3.54	0.55	4.28	3.53	0.56	4.53	3.76	0.56
	20	4.12	3.76	1.23	4.59	3.78	1.25	4.74	4.11	1.26	5.05	4.12	1.27	5.21	4.45	1.28	5.52	4.43	1.29	5.84	4.72	1.31
	25	3.95	3.62	1.37	4.40	3.64	1.40	4.55	3.96	1.40	4.85	3.97	1.42	5.00	4.29	1.42	5.30	4.27	1.44	5.60	4.55	1.45
	30	3.78	3.47	1.52	4.21	3.49	1.54	4.35	3.80	1.55	4.64	3.81	1.57	4.78	4.12	1.57	5.07	4.10	1.59	5.36	4.37	1.61
	35	3.48	3.22	1.54	3.87	3.24	1.56	4.00	3.52	1.57	4.27	3.54	1.59	4.40	3.82	1.60	4.66	3.80	1.61	4.93	4.05	1.63
	40	2.96	2.80	1.31	3.29	2.81	1.33	3.40	3.06	1.34	3.63	3.07	1.35	3.74	3.31	1.36	3.97	3.30	1.37	4.19	3.51	1.39
	46	2.19	2.17	1.00	2.44	2.18	1.02	2.52	2.38	1.03	2.68	2.38	1.04	2.77	2.57	1.04	2.93	2.56	1.05	3.10	2.73	1.06

■ MODEL : AU*A12L, AU*F12L / AO*B12L

AFR	10.0
-----	------

		Indoor temperature																				
		18			21			23			25			27			29			32		
		12			15			16			18			19			21			23		
Outdoor temperature	°CDB	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
	-10	3.47	3.22	0.29	3.87	3.24	0.30	4.00	3.52	0.30	4.26	3.53	0.30	4.40	3.81	0.30	4.66	3.80	0.31	4.92	4.05	0.31
	0	3.29	3.07	0.49	3.67	3.09	0.50	3.79	3.36	0.50	4.05	3.37	0.51	4.17	3.64	0.51	4.42	3.63	0.51	4.67	3.86	0.52
	5	3.30	3.07	0.47	3.67	3.09	0.48	3.80	3.36	0.48	4.05	3.37	0.49	4.17	3.64	0.49	4.42	3.63	0.50	4.67	3.86	0.50
	10	3.30	3.07	0.44	3.67	3.09	0.45	3.80	3.36	0.45	4.05	3.37	0.45	4.17	3.64	0.46	4.42	3.63	0.46	4.67	3.86	0.46
	15	3.19	2.99	0.53	3.56	3.01	0.54	3.68	3.27	0.54	3.92	3.28	0.55	4.04	3.54	0.55	4.28	3.53	0.56	4.53	3.76	0.56
	20	4.12	3.76	1.23	4.59	3.78	1.25	4.74	4.11	1.26	5.05	4.12	1.27	5.21	4.45	1.28	5.52	4.43	1.29	5.84	4.72	1.31
	25	3.95	3.62	1.37	4.40	3.64	1.40	4.55	3.96	1.40	4.85	3.97	1.42	5.00	4.29	1.42	5.30	4.27	1.44	5.60	4.55	1.45
	30	3.78	3.47	1.52	4.21	3.49	1.54	4.35	3.80	1.55	4.64	3.81	1.57	4.78	4.12	1.57	5.07	4.10	1.59	5.36	4.37	1.61
	35	3.40	3.14	1.54	3.78	3.16	1.56	3.91	3.43	1.57	4.17	3.44	1.59	4.30	3.72	1.60	4.56	3.70	1.61	4.81	3.94	1.63
	40	2.89	2.72	1.31	3.22	2.74	1.33	3.33	2.98	1.34	3.55	2.99	1.35	3.66	3.23	1.36	3.87	3.21	1.37	4.09	3.42	1.39
	46	2.14	2.12	1.00	2.38	2.13	1.02	2.46	2.32	1.03	2.62	2.32	1.04	2.70	2.51	1.04	2.87	2.50	1.05	3.03	2.66	1.06

AFR : Air Flow Rate (m³/min)

TC : Total Capacity (kW)

SHC : Sensible Heat Capacity (kW)

PI : Power Input (kW)

■ MODEL : AU*A14L, AU*F14L / AO*A14L

AFR	11.3
-----	------

		Indoor temperature																								
		18			21			23			25			27			29			32						
		°CDB			°CWB			12			15			16			18			19			21			23
Outdoor temperature	°CDB	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI				
	-10	4.08	3.75	0.39	4.54	3.77	0.40	4.69	4.10	0.40	5.00	4.11	0.40	5.16	4.44	0.40	5.47	4.43	0.41	5.78	4.71	0.41				
	0	3.98	3.68	0.45	4.44	3.70	0.46	4.59	4.02	0.46	4.89	4.03	0.47	5.04	4.35	0.47	5.34	4.34	0.48	5.65	4.62	0.48				
	5	3.87	3.59	0.56	4.31	3.61	0.57	4.46	3.92	0.57	4.75	3.93	0.58	4.90	4.25	0.58	5.19	4.23	0.59	5.49	4.51	0.59				
	10	3.74	3.48	0.66	4.17	3.50	0.67	4.31	3.81	0.68	4.60	3.82	0.68	4.74	4.13	0.69	5.02	4.11	0.70	5.31	4.38	0.70				
	15	3.75	3.49	0.58	4.18	3.51	0.59	4.32	3.82	0.60	4.61	3.83	0.60	4.75	4.14	0.60	5.04	4.12	0.61	5.32	4.39	0.62				
	20	4.72	4.27	1.23	5.26	4.30	1.25	5.44	4.67	1.25	5.79	4.69	1.27	5.97	5.06	1.27	6.33	5.04	1.29	6.69	5.37	1.30				
	25	4.53	4.11	1.37	5.04	4.14	1.39	5.21	4.50	1.40	5.56	4.51	1.41	5.73	4.88	1.42	6.07	4.86	1.44	6.42	5.17	1.45				
	30	4.32	3.95	1.52	4.81	3.97	1.54	4.98	4.32	1.55	5.30	4.33	1.56	5.47	4.68	1.57	5.80	4.66	1.59	6.12	4.96	1.60				
	35	4.27	3.90	1.79	4.75	3.93	1.82	4.91	4.27	1.83	5.24	4.28	1.85	5.40	4.63	1.85	5.72	4.61	1.87	6.05	4.91	1.89				
40	3.28	3.12	1.28	3.66	3.13	1.30	3.78	3.41	1.30	4.03	3.42	1.32	4.16	3.69	1.32	4.41	3.68	1.34	4.66	3.92	1.35					
46	2.36	2.39	0.97	2.63	2.40	0.98	2.72	2.61	0.99	2.90	2.62	1.00	2.99	2.83	1.00	3.17	2.82	1.01	3.35	3.00	1.02					

■ MODEL : AU*A14L, AU*F14L / AO*B14L

AFR	11.3
-----	------

		Indoor temperature																				
		18			21			23			25			27			29			32		
		12			15			16			18			19			21			23		
Outdoor temperature	°CDB	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
	-10	4.08	3.75	0.39	4.54	3.77	0.40	4.69	4.10	0.40	5.00	4.11	0.40	5.16	4.44	0.40	5.47	4.43	0.41	5.78	4.71	0.41
	0	3.98	3.68	0.45	4.44	3.70	0.46	4.59	4.02	0.46	4.89	4.03	0.47	5.04	4.35	0.47	5.34	4.34	0.48	5.65	4.62	0.48
	5	3.87	3.59	0.56	4.31	3.61	0.57	4.46	3.92	0.57	4.75	3.93	0.58	4.90	4.25	0.58	5.19	4.23	0.59	5.49	4.51	0.59
	10	3.74	3.48	0.66	4.17	3.50	0.67	4.31	3.81	0.68	4.60	3.82	0.68	4.74	4.13	0.69	5.02	4.11	0.70	5.31	4.38	0.70
	15	3.75	3.49	0.58	4.18	3.51	0.59	4.32	3.82	0.60	4.61	3.83	0.60	4.75	4.14	0.60	5.04	4.12	0.61	5.32	4.39	0.62
	20	4.72	4.27	1.23	5.26	4.30	1.25	5.44	4.67	1.25	5.79	4.69	1.27	5.97	5.06	1.27	6.33	5.04	1.29	6.69	5.37	1.30
	25	4.53	4.11	1.37	5.04	4.14	1.39	5.21	4.50	1.40	5.56	4.51	1.41	5.73	4.88	1.42	6.07	4.86	1.44	6.42	5.17	1.45
	30	4.32	3.95	1.52	4.81	3.97	1.54	4.98	4.32	1.55	5.30	4.33	1.56	5.47	4.68	1.57	5.80	4.66	1.59	6.12	4.96	1.60
	35	4.11	3.74	1.79	4.58	3.76	1.82	4.73	4.09	1.83	5.04	4.10	1.85	5.20	4.43	1.85	5.51	4.41	1.87	5.82	4.70	1.89
	40	3.16	2.99	1.28	3.52	3.00	1.30	3.64	3.27	1.30	3.88	3.28	1.32	4.00	3.54	1.32	4.24	3.52	1.34	4.48	3.75	1.35
	46	2.27	2.30	0.97	2.53	2.31	0.98	2.62	2.51	0.99	2.79	2.52	1.00	2.88	2.72	1.00	3.05	2.71	1.01	3.22	2.89	1.02

AFR : Air Flow Rate (m³/min)

TC : Total Capacity (kW)

SHC : Sensible Heat Capacity (kW)

PI : Power Input (kW)

6-2. HEATING CAPACITY

This table is created using the maximum capacity.

■ MODEL : AU *A12L, AU *F12L / AO *A12L

AFR	10.0
-----	------

		Indoor temperature										
		°CDB	16		18		20		22		24	
Outdoor temperature	°CDB	°CWB	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
	-15	-16	3.76	1.87	3.67	1.91	3.58	1.95	3.49	1.99	3.40	2.03
	-10	-11	4.26	1.87	4.16	1.91	4.06	1.95	3.96	1.99	3.86	2.03
	-5	-7	4.69	2.15	4.58	2.19	4.47	2.23	4.35	2.28	4.20	2.30
	0	-2	5.30	2.14	5.17	2.18	5.05	2.23	4.92	2.27	4.76	2.30
	5	3	5.79	2.15	5.65	2.19	5.51	2.24	5.38	2.28	5.18	2.30
	7	6	5.99	2.07	5.85	2.11	5.70	2.15	5.56	2.20	5.42	2.24
	10	8	6.05	1.84	5.91	1.87	5.76	1.91	5.62	1.95	5.47	1.99
	15	10	6.08	1.76	5.93	1.80	5.79	1.84	5.64	1.87	5.50	1.91
	20	15	5.87	1.48	5.73	1.51	5.59	1.54	5.45	1.57	5.31	1.61
	24	18	5.86	1.48	5.72	1.51	5.58	1.54	5.44	1.57	5.30	1.60

■ MODEL : AU *A12L, AU *F12L / AO *B12L

AFR	10.0
-----	------

		Indoor temperature										
		°CDB	16		18		20		22		24	
Outdoor temperature	°CDB	°CWB	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
	-15	-16	3.76	1.87	3.67	1.91	3.58	1.95	3.49	1.99	3.40	2.03
	-10	-11	4.26	1.87	4.16	1.91	4.06	1.95	3.96	1.99	3.86	2.03
	-5	-7	4.53	2.15	4.42	2.19	4.31	2.23	4.20	2.28	4.20	2.30
	0	-2	5.12	2.14	4.99	2.18	4.87	2.23	4.75	2.27	4.76	2.30
	5	3	5.59	2.15	5.45	2.19	5.32	2.24	5.19	2.28	5.18	2.30
	7	6	5.78	2.07	5.64	2.11	5.50	2.15	5.37	2.20	5.23	2.24
	10	8	5.84	1.84	5.70	1.87	5.56	1.91	5.42	1.95	5.28	1.99
	15	10	5.87	1.76	5.73	1.80	5.59	1.84	5.45	1.87	5.31	1.91
	20	15	5.67	1.48	5.53	1.51	5.40	1.54	5.26	1.57	5.13	1.61
	24	18	5.65	1.48	5.52	1.51	5.38	1.54	5.25	1.57	5.11	1.60

AFR : Air Flow Rate (m³/min)

TC : Total Capacity (kW)

PI : Power Input (kW)

■ MODEL : AU*A14L, AU*F14L / AO*A14L

AFR	14.7
-----	------

		Indoor temperature										
		°CDB	16		18		20		22		24	
Outdoor temperature	°CDB	°CWB	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
	-15	-16	4.24	2.16	4.14	2.21	4.04	2.25	3.94	2.30	3.84	2.34
	-10	-11	4.88	2.16	4.76	2.21	4.65	2.25	4.53	2.30	4.41	2.34
	-5	-7	5.49	2.40	5.36	2.45	5.23	2.50	5.10	2.55	4.97	2.60
	0	-2	6.37	2.73	6.22	2.79	6.07	2.84	5.87	2.88	5.61	2.88
	5	3	6.97	2.71	6.80	2.77	6.64	2.83	6.47	2.88	6.18	2.88
	7	6	6.82	2.36	6.66	2.40	6.50	2.45	6.34	2.50	6.17	2.55
	10	8	7.03	2.37	6.86	2.42	6.70	2.47	6.53	2.52	6.36	2.56
	15	10	6.75	2.07	6.59	2.12	6.43	2.16	6.27	2.20	6.11	2.25
	20	15	6.22	1.59	6.07	1.63	5.92	1.66	5.77	1.69	5.62	1.73
	24	18	6.40	1.60	6.25	1.64	6.10	1.67	5.94	1.70	5.79	1.74

■ MODEL : AU*A14L, AU*F14L / AO*B14L

AFR	14.7
-----	------

		Indoor temperature										
		°CDB	16		18		20		22		24	
Outdoor temperature	°CDB	°CWB	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
	-15	-16	4.24	2.16	4.14	2.21	4.04	2.25	3.94	2.30	3.84	2.34
	-10	-11	4.88	2.16	4.76	2.21	4.65	2.25	4.53	2.30	4.41	2.34
	-5	-7	5.49	2.40	5.36	2.45	5.23	2.50	5.10	2.55	4.97	2.60
	0	-2	6.37	2.73	6.22	2.79	6.07	2.84	5.87	2.88	5.61	2.88
	5	3	6.75	2.71	6.59	2.77	6.43	2.83	6.27	2.88	6.18	2.88
	7	6	6.61	2.36	6.45	2.40	6.30	2.45	6.14	2.50	5.98	2.55
	10	8	6.81	2.37	6.65	2.42	6.49	2.47	6.33	2.52	6.17	2.56
	15	10	6.54	2.07	6.39	2.12	6.23	2.16	6.07	2.20	5.92	2.25
	20	15	6.02	1.59	5.88	1.63	5.74	1.66	5.59	1.69	5.45	1.73
	24	18	6.20	1.60	6.05	1.64	5.91	1.67	5.76	1.70	5.61	1.74

AFR : Air Flow Rate (m³/min)

TC : Total Capacity (kW)




PI : Power Input (kW)

7. FAN PERFORMANCE

7-1. AIR VELOCITY DISTRIBUTION




■ MODEL : AU*A12L, AU*F12L

● 4-WAY AIR OUTLET

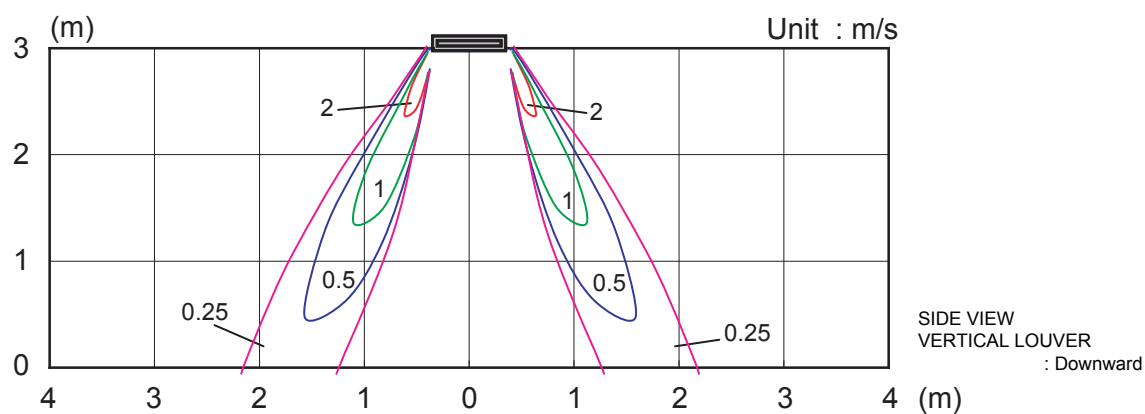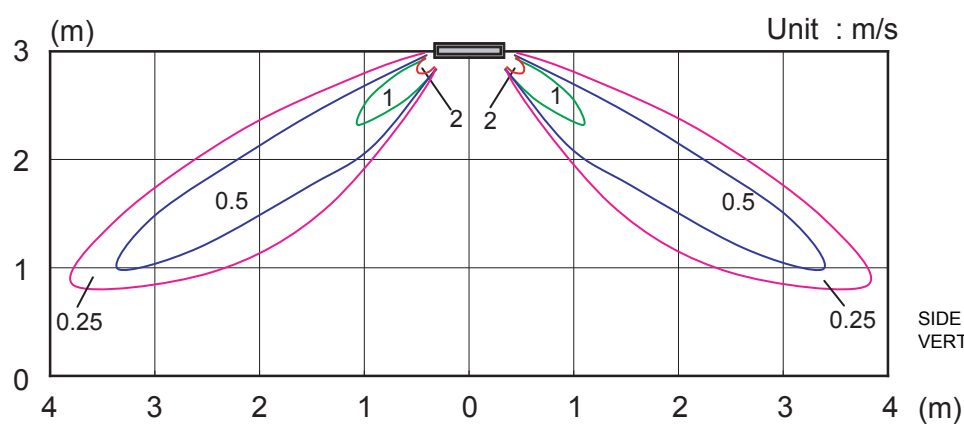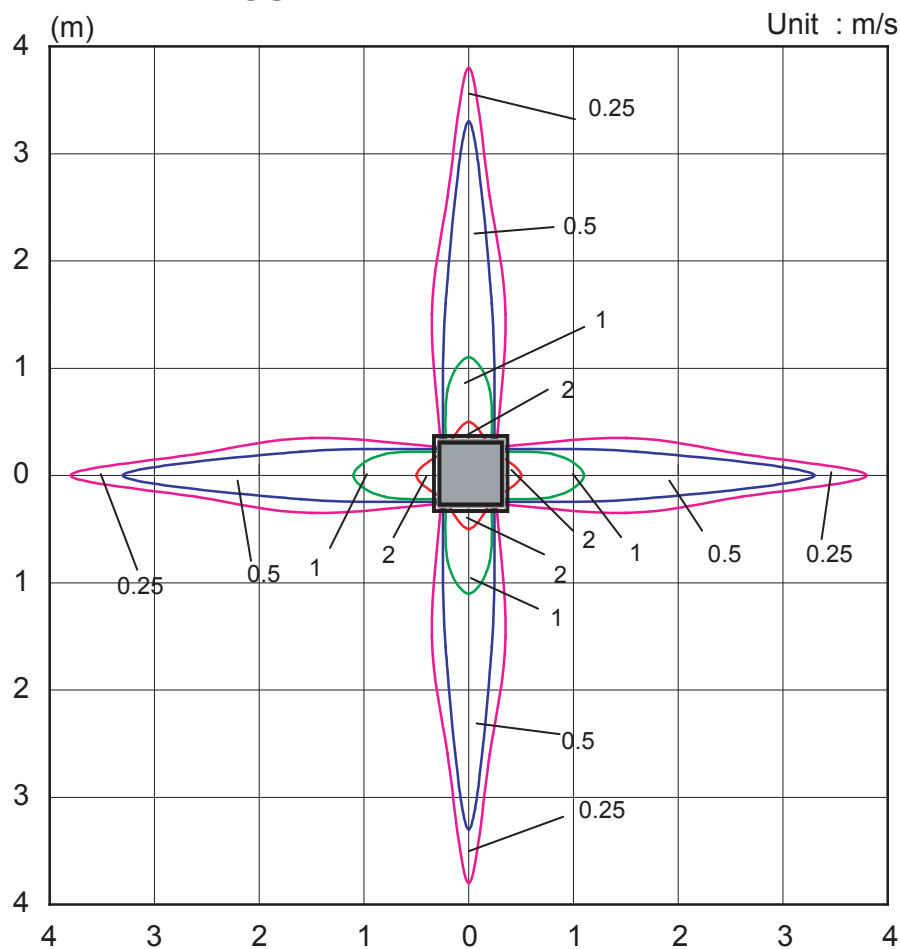

Note :
Condition
Fan speed : High
Operation mode : FAN
Ceiling mode : Standard


● 3-WAY AIR OUTLET

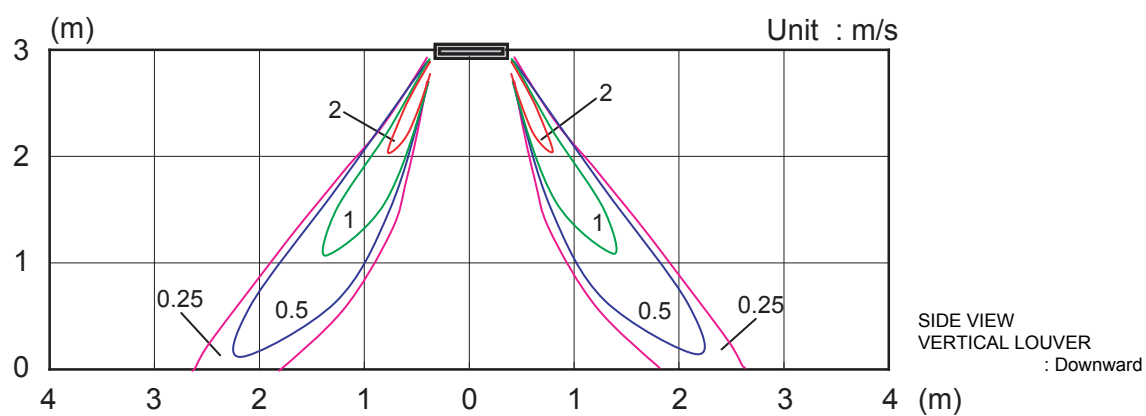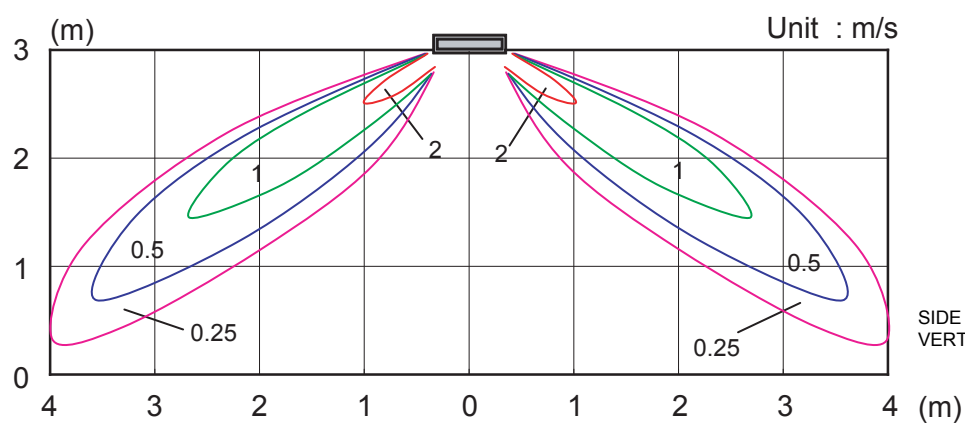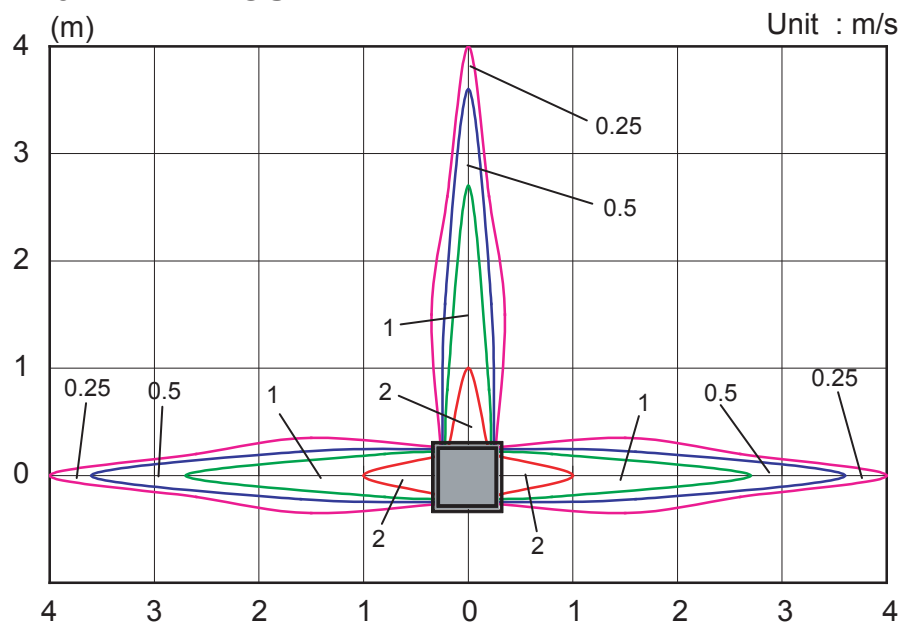



Note :
Condition
Fan speed : High
Operation mode : FAN
Ceiling mode : Standard

■ MODEL : AU*A14L, AU*F14L


● 4-WAY AIR OUTLET

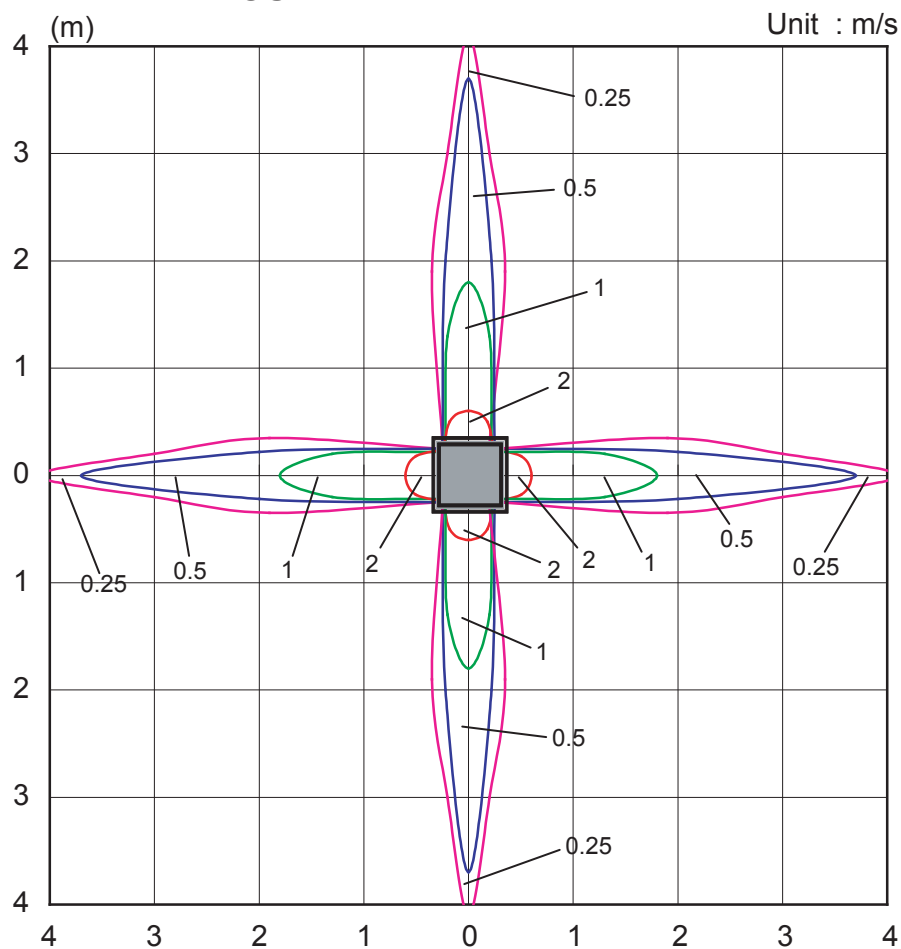

Note :
Condition
Fan speed : High
Operation mode : FAN
Ceiling mode : Standard

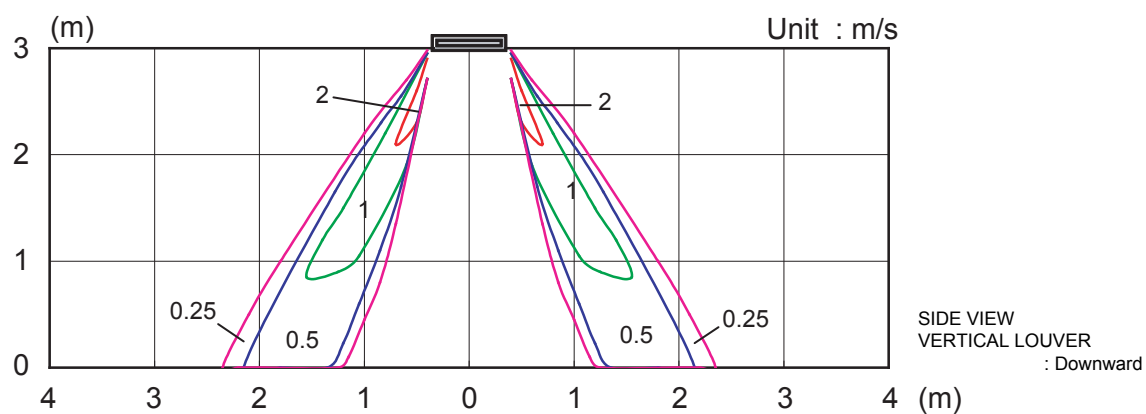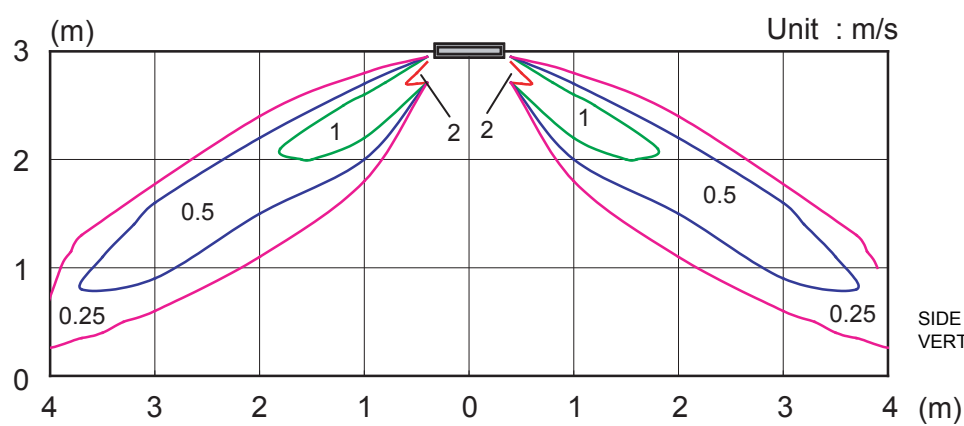

● 3-WAY AIR OUTLET

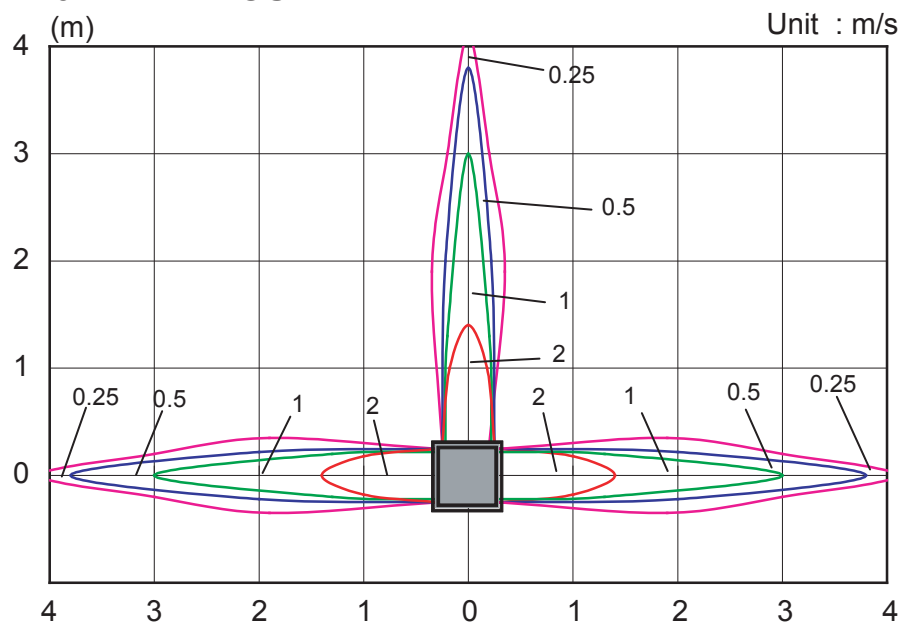



Note :

Condition

Fan speed : High

Operation mode : FAN

Ceiling mode : Standard

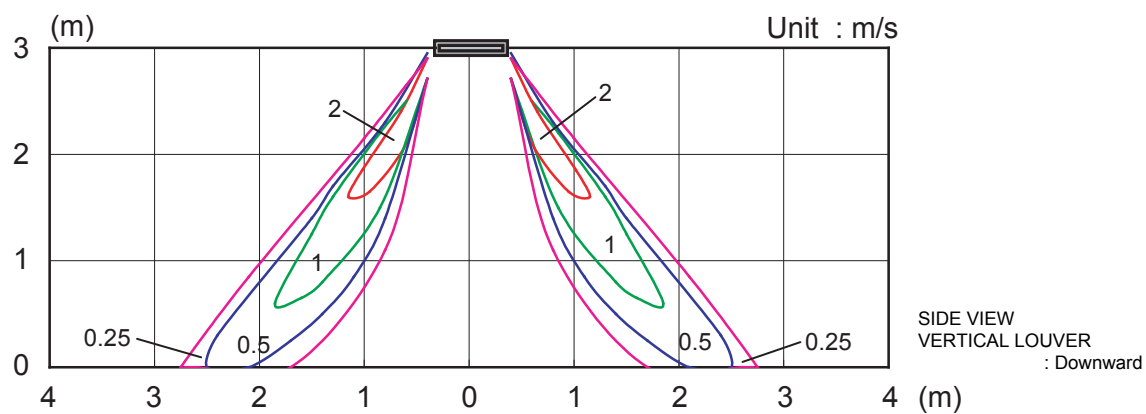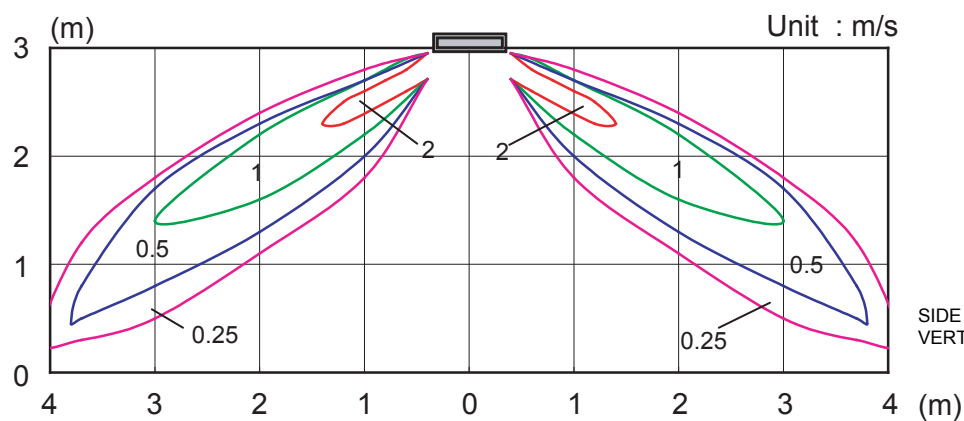

7-2. AIR FLOW

7-2-1. STANDARD CEILING MODE

■ MODEL : AU*A12L, AU*F12L

● COOLING

Fan speed	Number of rotations (r.p.m)	Air flow	
HIGH	650	m ³ /h	600
		l/s	167
		CFM	353
MED	580	m ³ /h	530
		l/s	147
		CFM	312
LOW	520	m ³ /h	470
		l/s	131
		CFM	277
QUIET	460	m ³ /h	410
		l/s	114
		CFM	241

● HEATING

Fan speed	Number of rotations (r.p.m)	Air flow	
HIGH	650	m ³ /h	600
		l/s	167
		CFM	353
MED	580	m ³ /h	530
		l/s	147
		CFM	312
LOW	520	m ³ /h	470
		l/s	131
		CFM	277
QUIET	460	m ³ /h	410
		l/s	114
		CFM	241

■ MODEL : AU*A14L, AU*F14L

● COOLING

Fan speed	Number of rotations (r.p.m)	Air flow	
HIGH	730	m ³ /h	680
		l/s	189
		CFM	400
MED	630	m ³ /h	580
		l/s	161
		CFM	341
LOW	540	m ³ /h	490
		l/s	136
		CFM	288
QUIET	460	m ³ /h	410
		l/s	114
		CFM	241

● HEATING

Fan speed	Number of rotations (r.p.m)	Air flow	
HIGH	830	m ³ /h	800
		l/s	222
		CFM	471
MED	730	m ³ /h	680
		l/s	189
		CFM	400
LOW	630	m ³ /h	580
		l/s	161
		CFM	341
QUIET	500	m ³ /h	450
		l/s	125
		CFM	265

7-2-2. HIGH CEILING MODE

■ MODEL : AU*A12L, AU*A12L

● COOLING

Fan speed	Number of rotations (r.p.m)	Air flow	
HIGH	750	m ³ /h	700
		l/s	194
		CFM	412
MED	680	m ³ /h	630
		l/s	175
		CFM	371
LOW	620	m ³ /h	570
		l/s	158
		CFM	335
QUIET	460	m ³ /h	410
		l/s	114
		CFM	241

● HEATING

Fan speed	Number of rotations (r.p.m)	Air flow	
HIGH	750	m ³ /h	700
		l/s	194
		CFM	412
MED	680	m ³ /h	630
		l/s	175
		CFM	371
LOW	620	m ³ /h	570
		l/s	158
		CFM	335
QUIET	460	m ³ /h	410
		l/s	114
		CFM	241

■ MODEL : AU*A14L, AU*F14L

● COOLING

Fan speed	Number of rotations (r.p.m)	Air flow	
HIGH	830	m ³ /h	800
		l/s	222
		CFM	471
MED	730	m ³ /h	680
		l/s	189
		CFM	400
LOW	640	m ³ /h	590
		l/s	164
		CFM	347
QUIET	460	m ³ /h	410
		l/s	114
		CFM	241

● HEATING


Fan speed	Number of rotations (r.p.m)	Air flow	
HIGH	930	m ³ /h	900
		l/s	250
		CFM	530
MED	830	m ³ /h	800
		l/s	222
		CFM	471
LOW	730	m ³ /h	680
		l/s	189
		CFM	400
QUIET	500	m ³ /h	450
		l/s	125
		CFM	265

8. OPERATION NOISE


8-1. NOISE LEVEL CURVE

■ MODEL : AU*A12L, AU*F12L

● COOLING

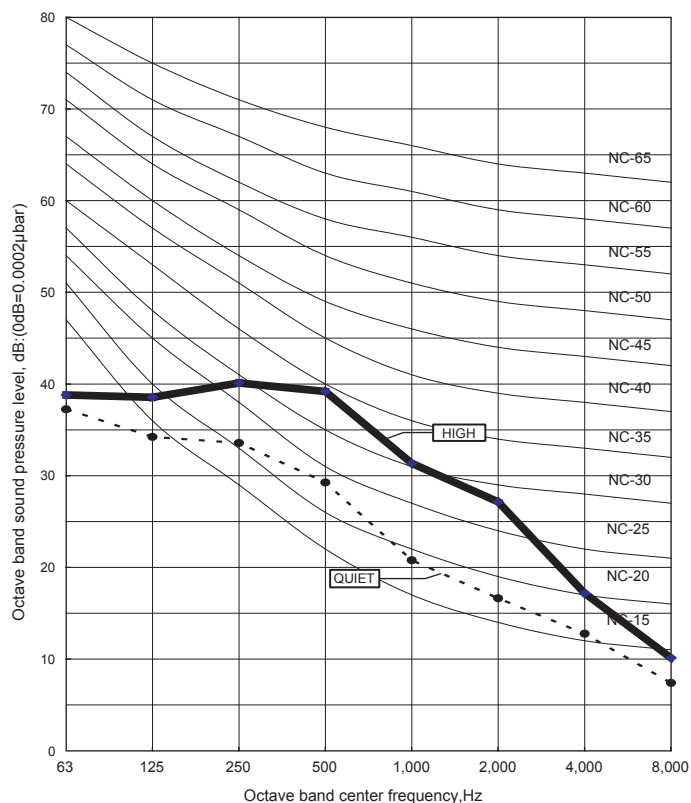


● HEATING

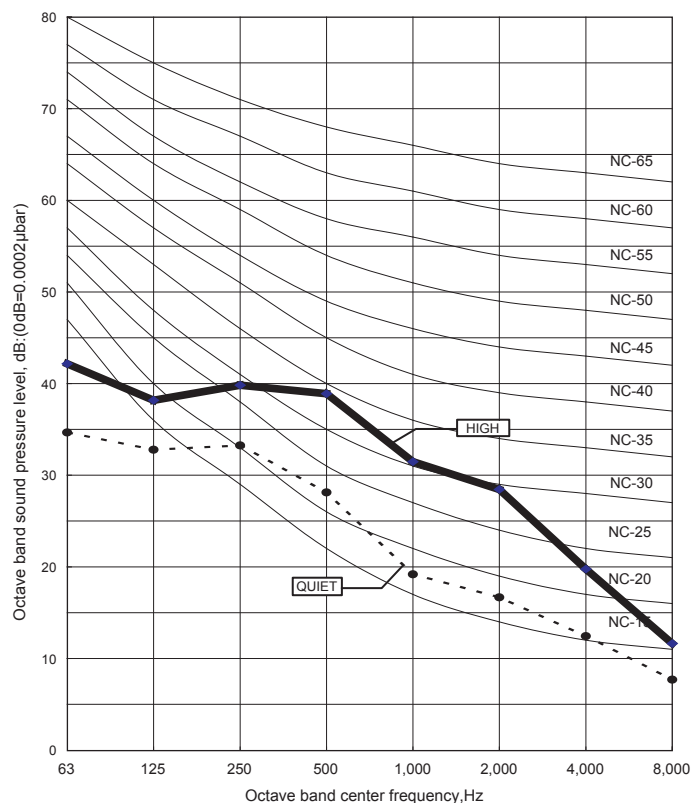


■ MODEL : AU*A14L, AU*F14L



● COOLING

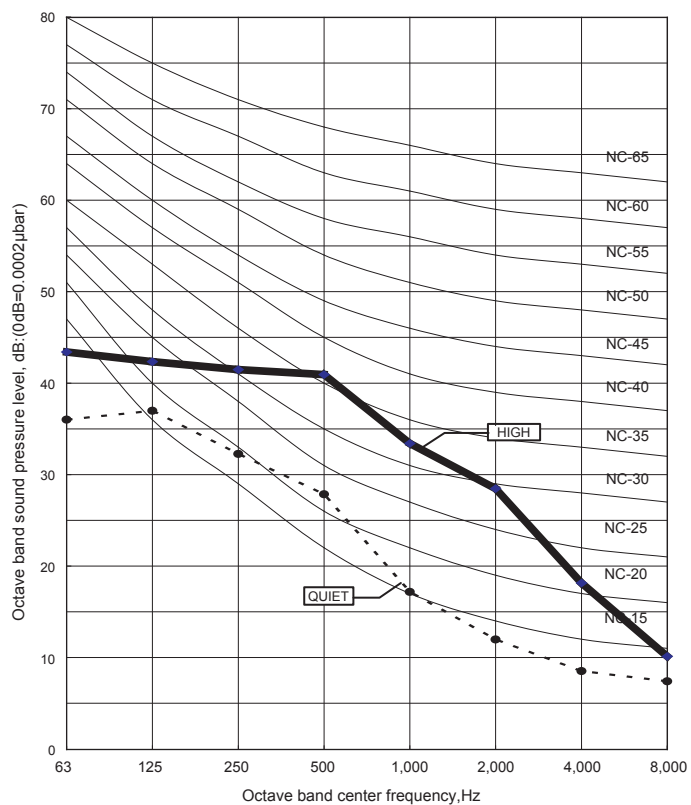

● HEATING

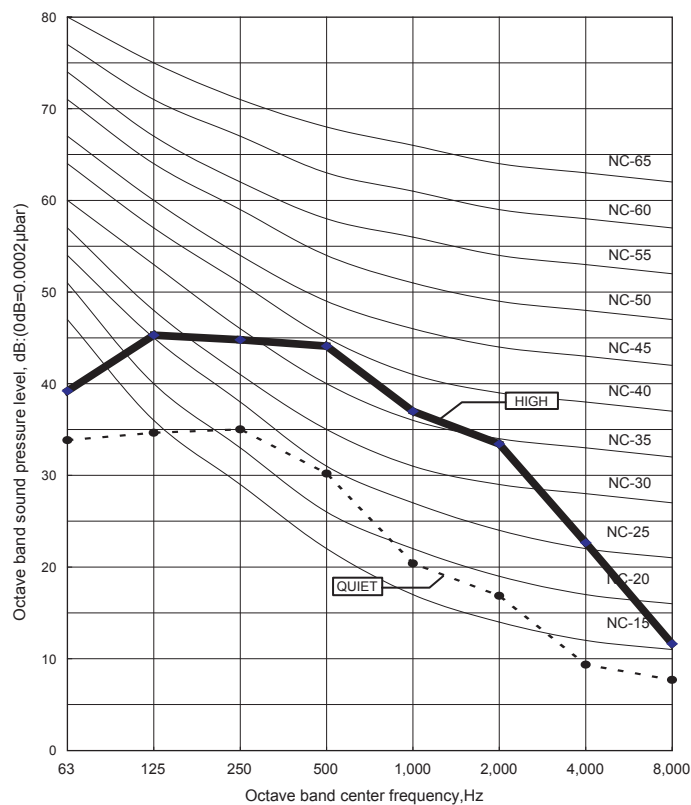

8-2. SOUND LEVEL CHECK POINT

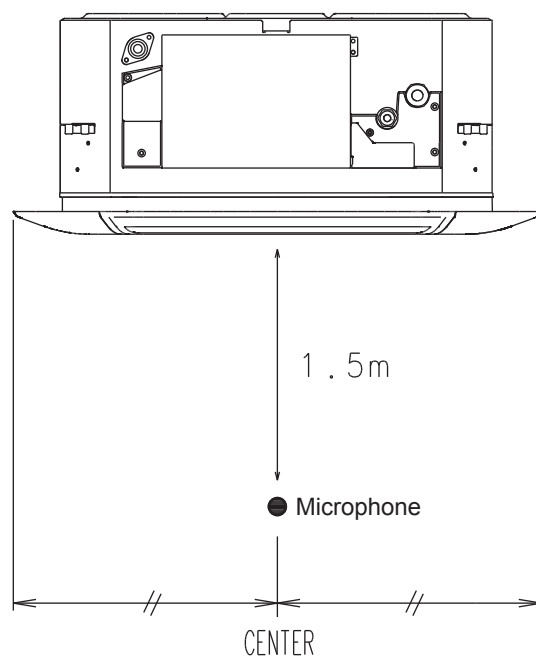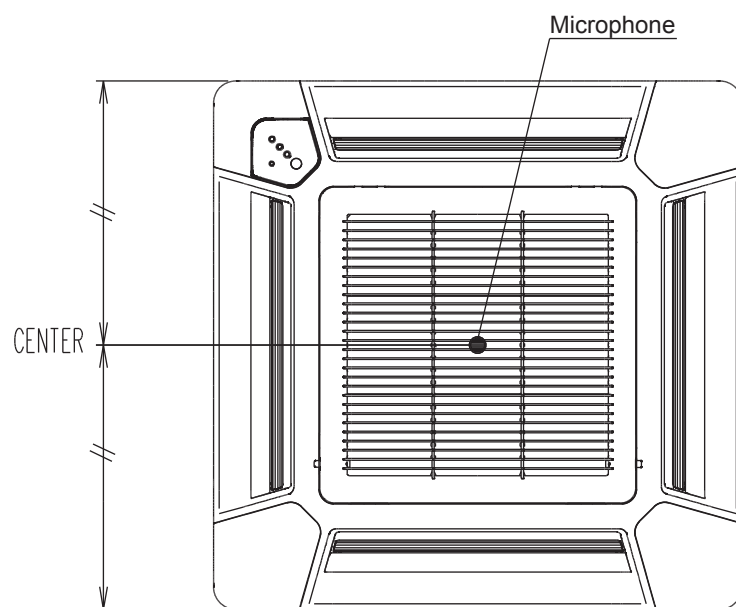






9. ELECTRIC CHARACTERISTICS

Model name			AU * A12L AU * F12L	AU * A14L AU * F14L
Power supply	Voltage	V	230 ~	
	Frequency	Hz	50	
Max. operating current (Indoor unit)		A	0.2	0.3
Wiring spec. (Indoor unit to outdoor unit)	Connection cable	mm ²	1.5-2.5	1.5-2.5
	Limited wiring length	m	26	26

10. SAFETY DEVICES

	Protection form	Model	
		AU * A12L AU * F12L	AU * A14L AU * F14L
Circuit protection	Current fuse (PCB)	3.15A 250V	
Fan motor protection	Thermal protection program	140±20°C OFF 110±20°C ON	

11. OPTIONAL PARTS

Exterior	Parts name	Model No.	Summary
	Wired remote controller	UTB-*UD	Unit control is performed by wired remote controller
	Decoration panel	UTG-UF*A-F	For AU*A12L, AU*A14L Ceiling dirt by discharged wind was made difficult to cling by reviewing the shape of the LOUVER.
	Air outlet shutter plate	UTR-YDZA	For AU*A12L, AU*A14L Air outlet shutter plate is installed at the air outlet when 3-way direction is performed.
	Decoration panel	UTG-UF*B-F	For AU*F12L, AU*F14L Ceiling dirt by discharged wind was made difficult to cling by reviewing the shape of the LOUVER.
	Air outlet shutter plate	UTR-YDZB	For AU*F12L, AU*F14L Air outlet shutter plate is installed at the air outlet when 3-way direction is performed.
	Fresh air intake kit	UTZ-VXAA	It can be taken in fresh air of up to 10% of "high" air volume of the indoor unit by attaching Fresh Air Intake Kit to cassette type indoor unit.

OUTDOOR UNIT

2. SINGLE TYPE :

AO * A12LACL

AO * A12LALL

AO * A14LACL

AO * A14LALL

1. SPECIFICATIONS

OUTDOOR UNIT
AO*A12-14L

OUTDOOR UNIT
AO*A12-14L

Type				INVERTER HEATPUMP	
Model name				AO * A12LACL AO * A12LALL	AO * A14LACL AO * A14LALL
Power source				230V~ 50Hz	
Available voltage range				198-264V~ 50Hz	
Starting current			A	4.9	5.9
Fan	Airflow rate	Cooling	m³/h	1780	1910
		Heating		1630	1740
	Type × Q'ty			Propeller × 1	
	Motor output			W	54
Sound pressure level		Cooling	dB(A)	47	49
		Heating		48	49
Heat exchanger type		Dimensions (H × W × D)	mm	546 × 876 × 18.2 546 × 842 × 18.2	
		Fin pitch		1.30	
		Rows x Stages		2 × 26	
		Pipe type		Copper	
		Fin type		Aluminium	
Compressor	Type × Q'ty			Twin Rotary × 1	
	Motor output		W	1100	
Refrigerant		Type		R410A	
		Charge	g	1150	1250
Refrigerant oil		Type		POE	
Enclosure		Material		Steel sheet	
		Colour		Beige (10YR7.5/1.0NN)	
Dimensions (H × W × D)	Net		mm	578 × 790 × 300	
	Gross			648 × 910 × 380	
Weight	Net		kg(lb.)	40 (88)	40 (88)
	Gross			44 (97)	44 (97)
Connection pipe	Size	Liquid	mm	Φ 6.35 (Φ 1/4 in.)	
		Gas		Φ 9.52 (Φ 3/8 in.)	Φ 12.70 (Φ 1/2 in.)
	Method			Flare	
	Max. length		m	25 (chargeless : 15)	
	Max. height difference			15	
Operation range		Cooling	°C	-10 to 46	
		Heating		-15 to 24	

Note :

Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB/19°CWB. and outdoor temperature of 35°CDB/24°CWB.

Heating : Indoor temperature of 20°CDB/15°CWB. and outdoor temperature of 7°CDB/6°CWB.

Pipe length : 7.5 m, Height difference : 0 m. (Outdoor unit - Indoor unit)






2. DIMENSIONS

■MODEL : AO*A12L, AO*A14L

(Unit : mm)

OUTDOOR UNIT
AO*A12-14L

OUTDOOR UNIT
AO*A12-14L

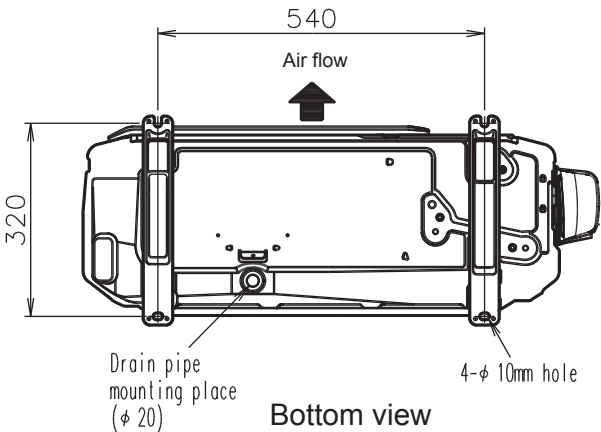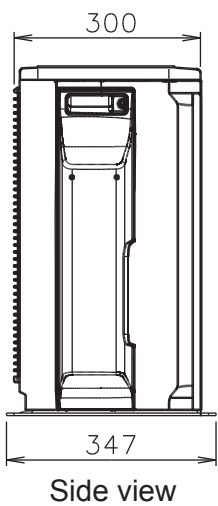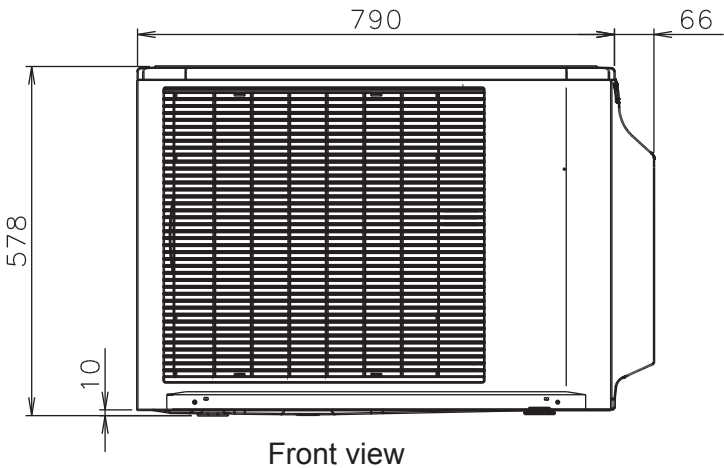
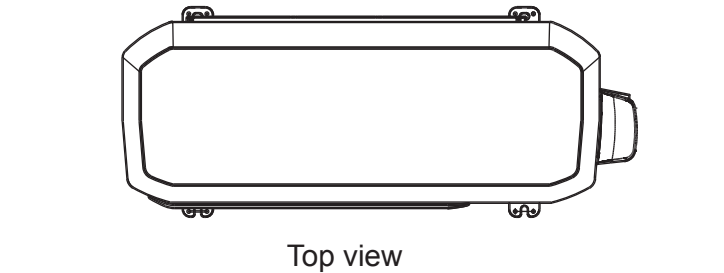


■MOUNTING POSITION

When there are obstacles at the back or front sides.

When there are obstacles at the back, side(s), and top.


When there are obstacles at the back, side with the installation of more than one unit.

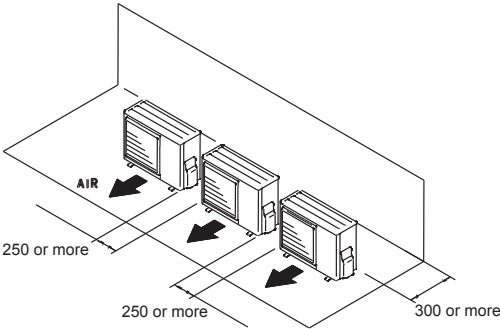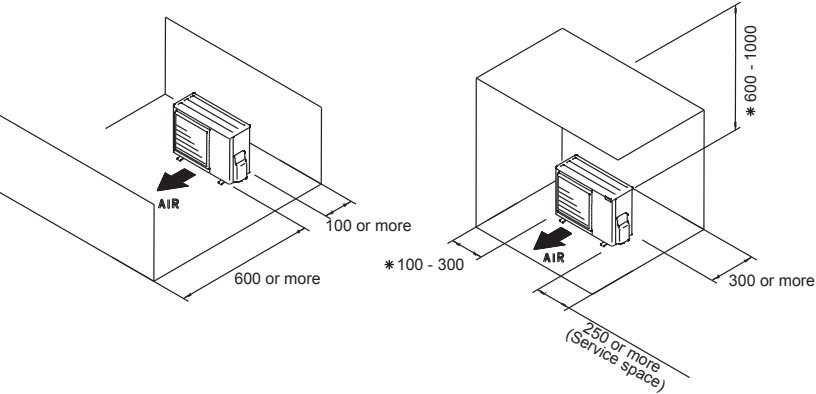

* If the space is larger that is stated, the condition will be the same as that are no obstacles.

3. REFRIGERANT CIRCUIT

■ MODEL : AO*A12L, AO*A14L

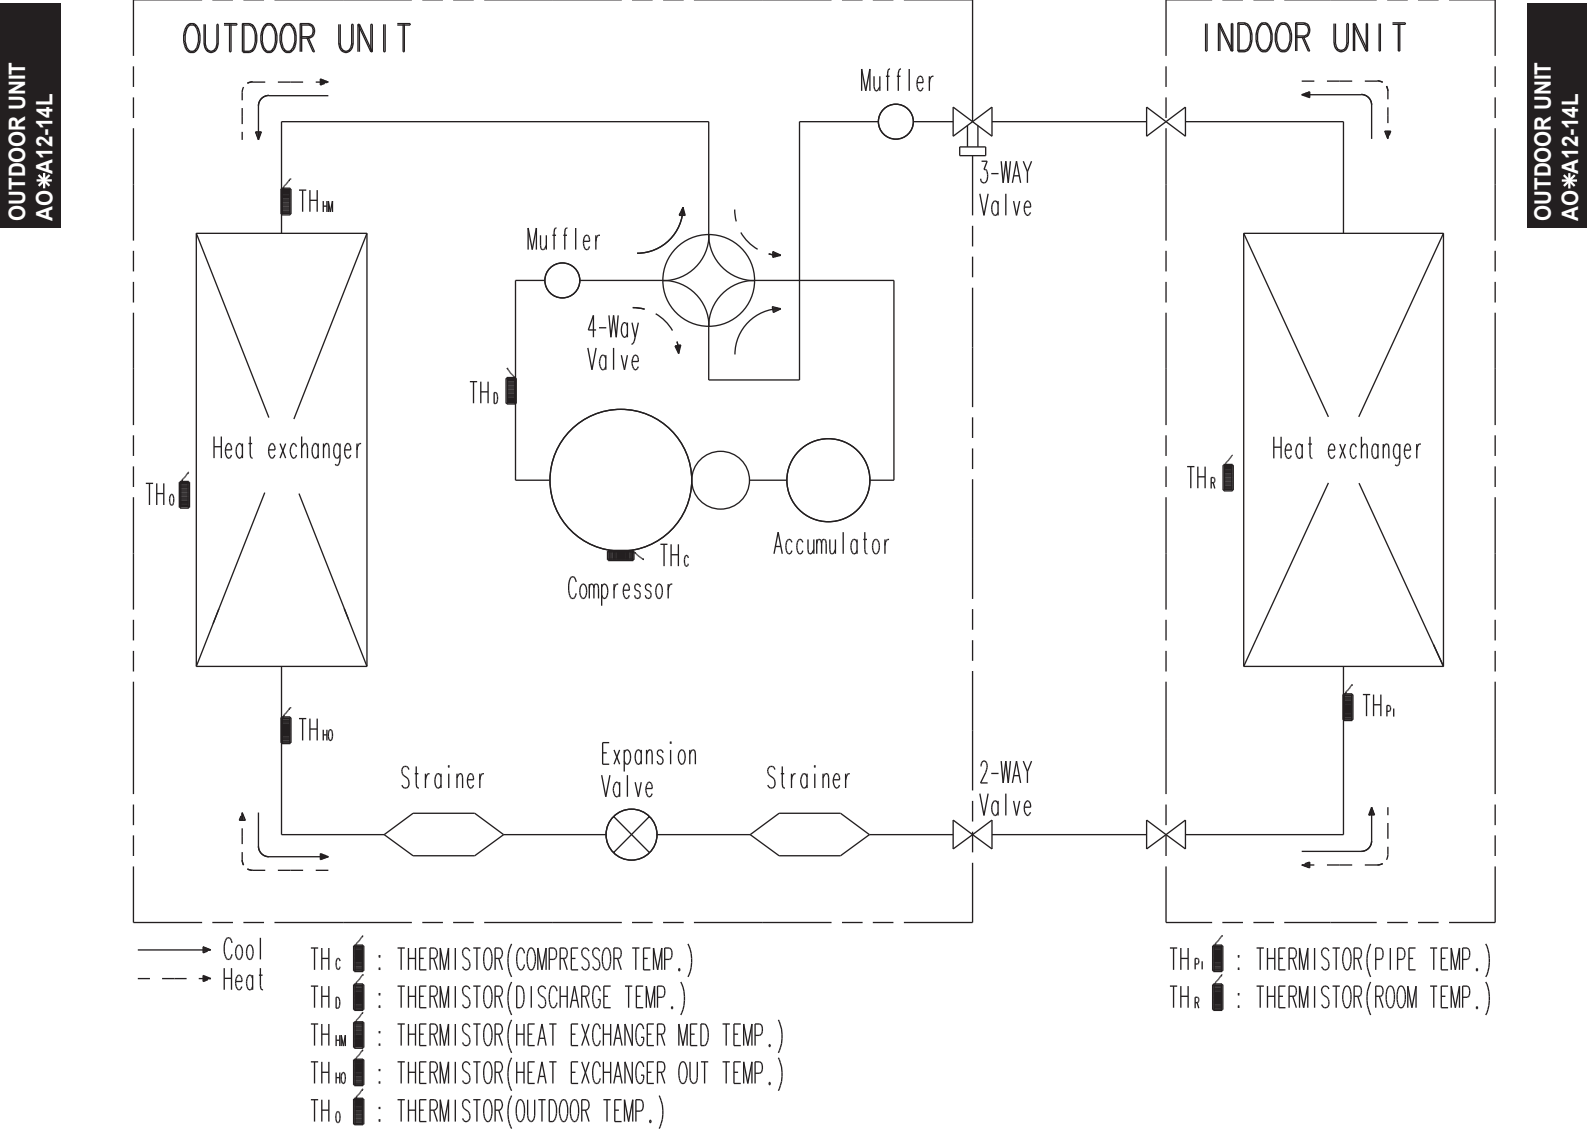


4. WIRING DIAGRAMS

■ MODEL : AO*A12L, AO*A14L

OUTDOOR UNIT
AO*A12-14L

OUTDOOR UNIT
AO*A12-14L

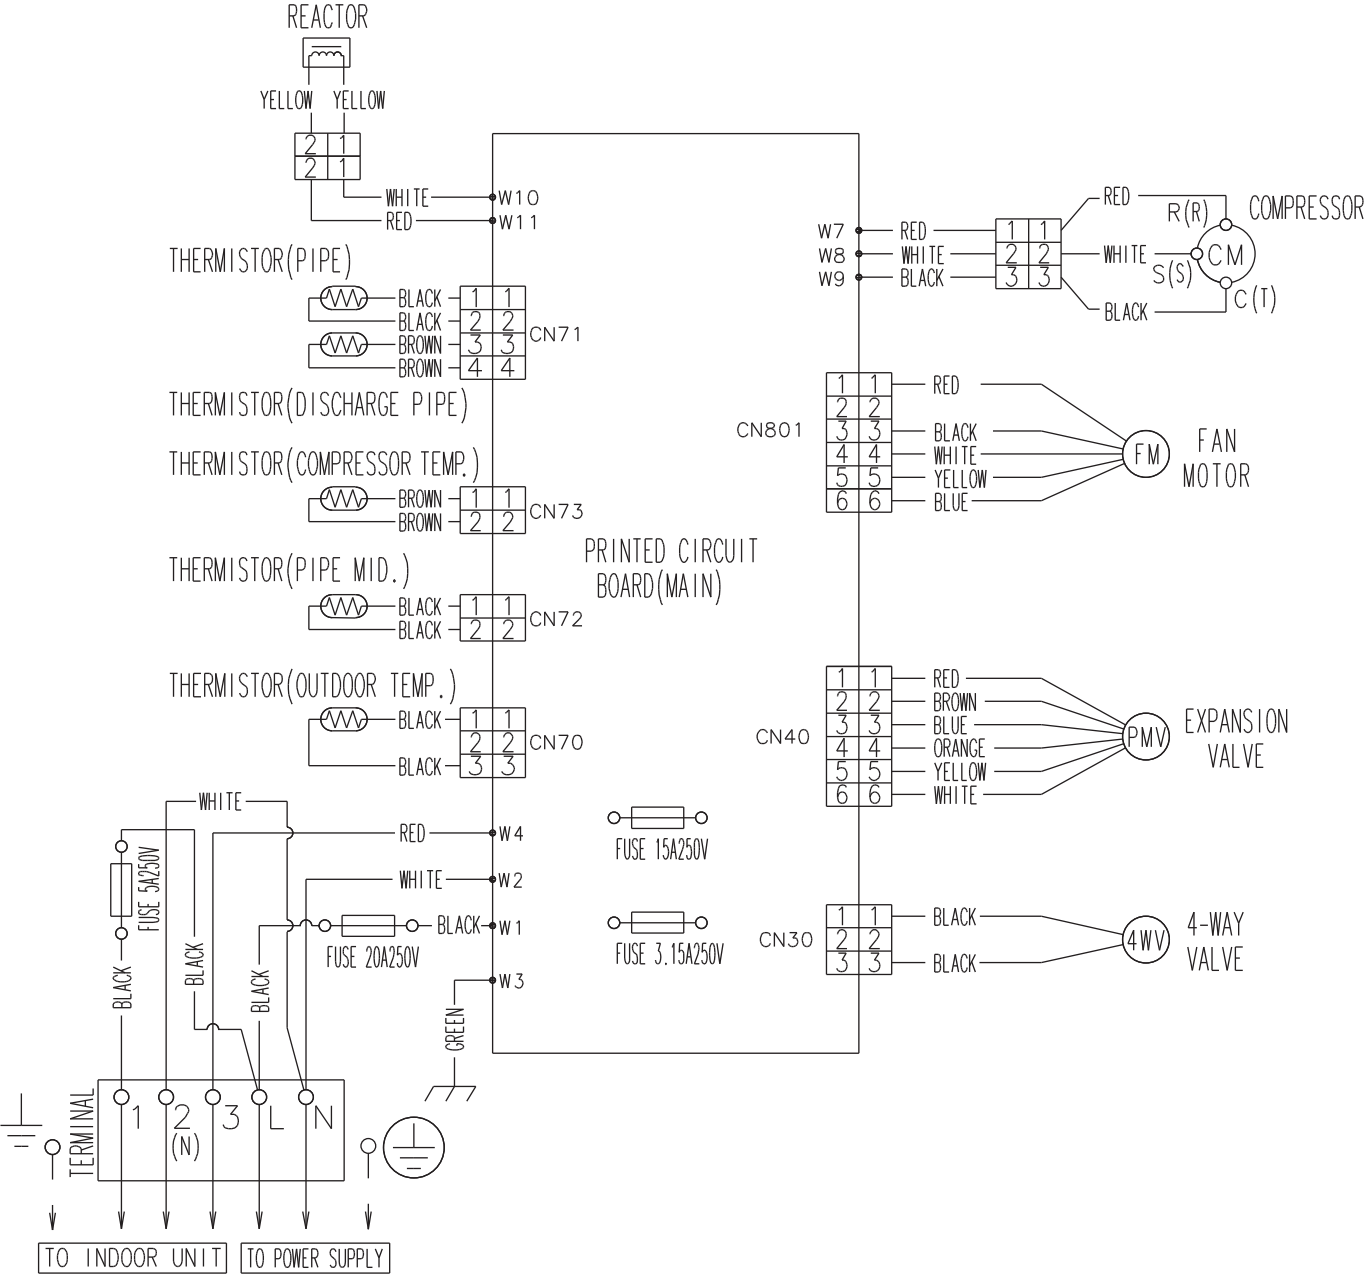

5. CAPACITY COMPENSATION RATE FOR PIPE LENGTH AND HEIGHT DIFFERENCE


This table is created using the maximum capacity.

■ MODEL : AO *A12L

COOLING			Pipe length (m)					
			5	7.5	10	15	20	25
Height difference H (m)	* 1 Indoor unit is upper than outdoor unit.	15	-	-	-	0.903	0.894	0.867
		10	-	-	0.964	0.918	0.909	0.881
		7.5	-	0.988	0.968	0.922	0.912	0.885
		5	1.018	0.992	0.972	0.925	0.916	0.888
		0	1.026	1.000	0.980	0.933	0.923	0.895
	* 2 Indoor unit is under than outdoor unit	-5	1.026	1.000	0.980	0.933	0.923	0.895
		-7.5	-	1.000	0.980	0.933	0.923	0.895
		-10	-	-	0.980	0.933	0.923	0.895
		-15	-	-	-	0.933	0.923	0.895

HEATING			Pipe length (m)					
			5	7.5	10	15	20	25
Height difference H (m)	* 1 Indoor unit is upper than outdoor unit.	15	-	-	-	0.943	0.916	0.896
		10	-	-	1.010	0.943	0.916	0.896
		7.5	-	1.000	1.010	0.943	0.916	0.896
		5	0.954	1.000	1.010	0.943	0.916	0.896
		0	0.954	1.000	1.010	0.943	0.916	0.896
	* 2 Indoor unit is under than outdoor unit	-5	0.949	0.995	1.005	0.939	0.912	0.892
		-7.5	-	0.993	1.002	0.936	0.909	0.890
		-10	-	-	0.999	0.934	0.907	0.887
		-15	-	-	-	0.925	0.898	0.878

Height difference H

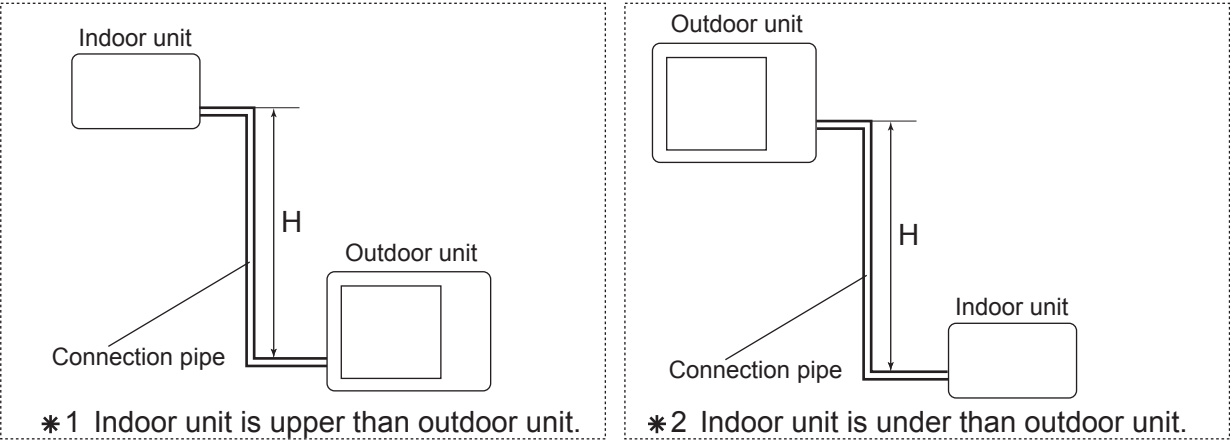


This table is created using the maximum capacity.

■ **MODEL : AO *A14L**

COOLING			Pipe length (m)					
			5	7.5	10	15	20	25
Height difference H (m)	* 1 Indoor unit is upper than outdoor unit.	15	-	-	-	0.953	0.950	0.947
		10	-	-	0.983	0.968	0.966	0.962
		7.5	-	0.988	0.987	0.972	0.970	0.966
		5	0.992	0.992	0.991	0.976	0.974	0.970
		0	1.000	1.000	0.999	0.984	0.982	0.978
	* 2 Indoor unit is under than outdoor unit	-5	1.000	1.000	0.999	0.984	0.982	0.978
		-7.5	-	1.000	0.999	0.984	0.982	0.978
		-10	-	-	0.999	0.984	0.982	0.978
		-15	-	-	-	0.984	0.982	0.978

HEATING			Pipe length (m)					
			5	7.5	10	15	20	25
Height difference H (m)	* 1 Indoor unit is upper than outdoor unit.	15	-	-	-	0.918	0.891	0.862
		10	-	-	0.981	0.918	0.891	0.862
		7.5	-	1.000	0.981	0.918	0.891	0.862
		5	0.994	1.000	0.981	0.918	0.891	0.862
		0	0.994	1.000	0.981	0.918	0.891	0.862
	* 2 Indoor unit is under than outdoor unit	-5	0.989	0.995	0.976	0.914	0.886	0.858
		-7.5	-	0.993	0.974	0.912	0.884	0.856
		-10	-	-	0.972	0.909	0.882	0.854
		-15	-	-	-	0.900	0.873	0.845

Height difference H

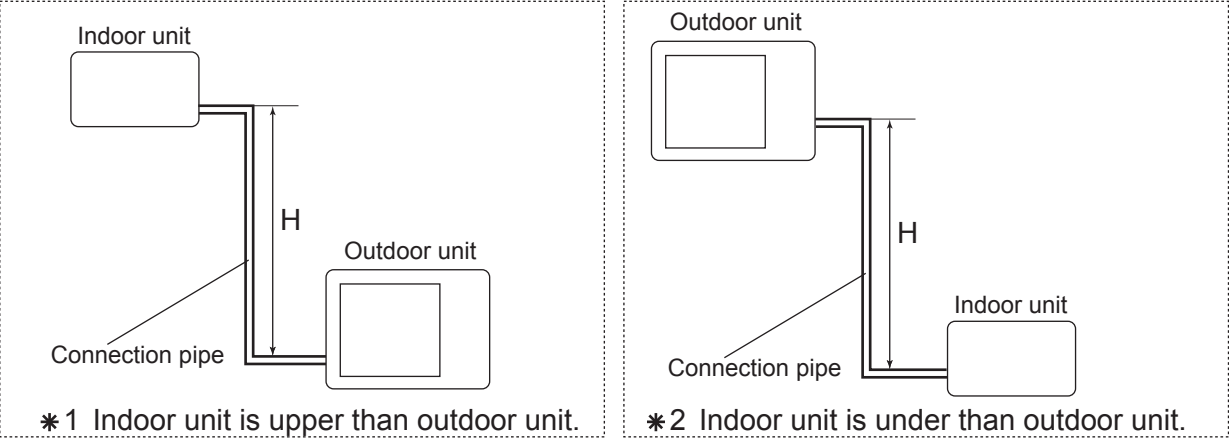

6. ADDITIONAL CHARGE CALCULATION

■ MODEL : AO*A12L

Refrigerant type		R410A
Refrigerant amount	g	1150

● REFRIGERANT CHARGE

Pipe length	m	~ 15	20	25	20g/m
Additional charge	g	0 (Chargeless)	+100	+200	

■ MODEL : AO*A14L

Refrigerant type		R410A
Refrigerant amount	g	1250

● REFRIGERANT CHARGE

Pipe length	m	~ 15	20	25	20g/m
Additional charge	g	0 (Chargeless)	+100	+200	

7. AIR FLOW

■ MODEL : AO *A12L

● COOLING

Number of rotations (r.p.m)	Air flow	
770	m ³ /h	1780
	l/s	494
	CFM	1048

● HEATING

Number of rotations (r.p.m)	Air flow	
700	m ³ /h	1630
	l/s	453
	CFM	959

■ MODEL : AO *A14L

● COOLING

Number of rotations (r.p.m)	Air flow	
820	m ³ /h	1910
	l/s	531
	CFM	1124

● HEATING


Number of rotations (r.p.m)	Air flow	
750	m ³ /h	1740
	l/s	483
	CFM	1024

8. OPERATION NOISE


8-1. NOISE LEVEL CURVE

COOLING

MODEL : AO*A12L

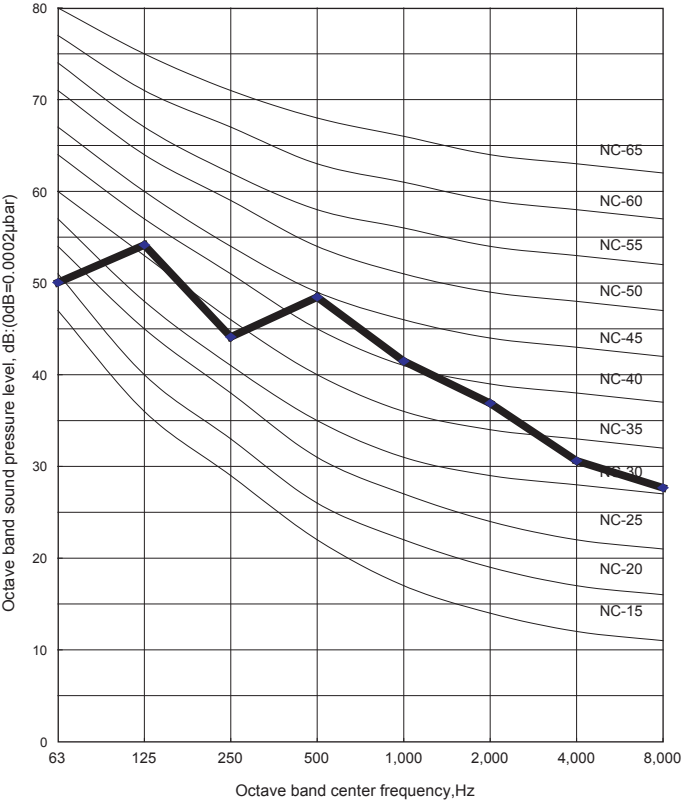


MODEL : AO*A14L

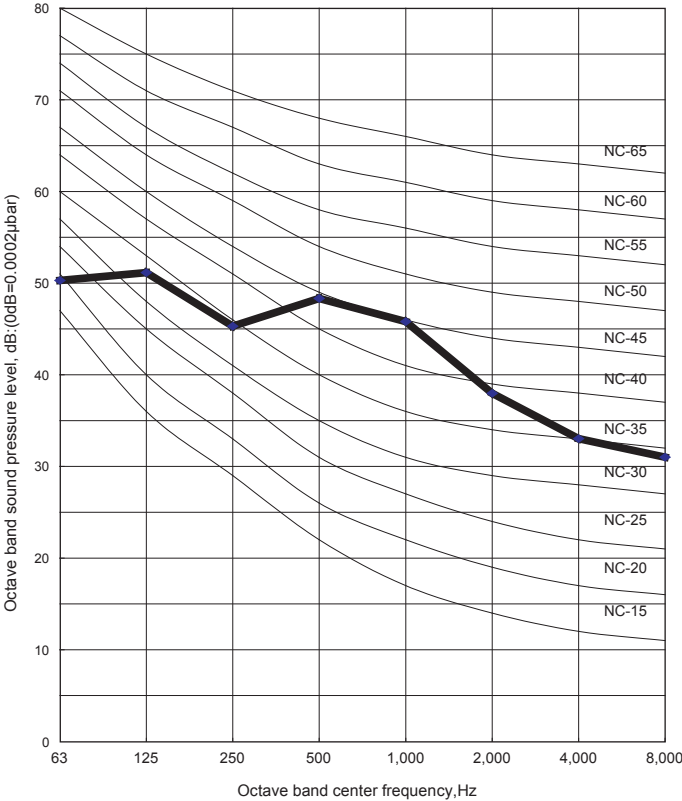


HEATING

MODEL : AO*A12L


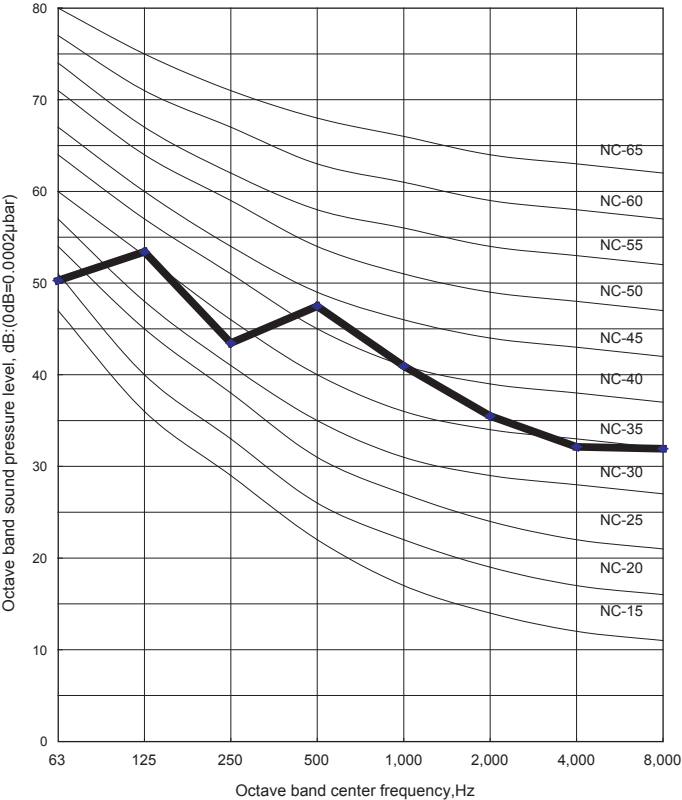


MODEL : AO*A14L

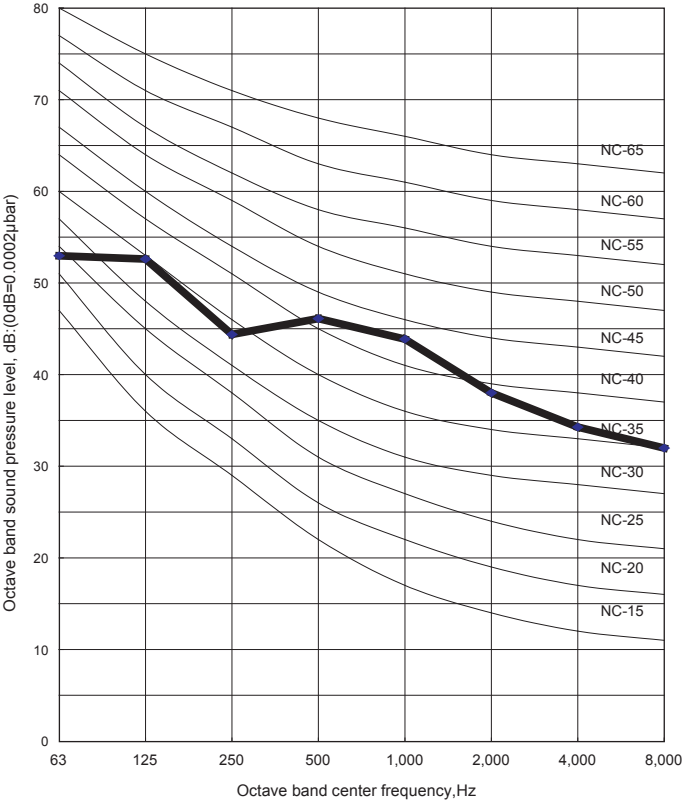

8-2. SOUND LEVEL CHECK POINT

OUTDOOR UNIT
AO*#A12-14L

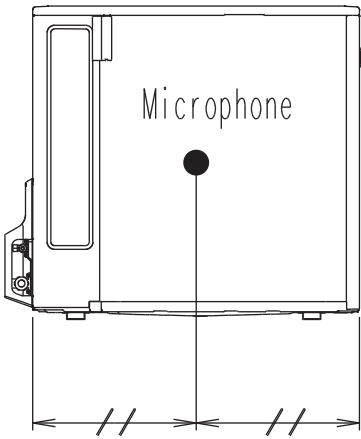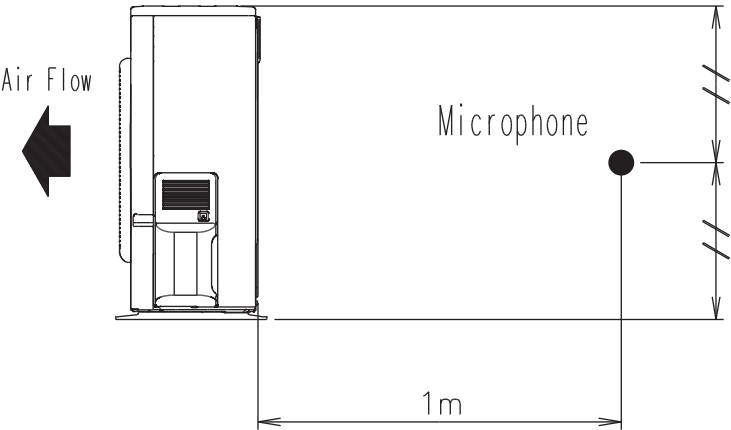

OUTDOOR UNIT
AO*#A12-14L

9. ELECTRIC CHARACTERISTICS

Model Name			AO * A12L	AO * A14L
Power Supply	Voltage	V	230~	
	Frequency	Hz	50	
Max Operating Current		A	10.0	12.5
Starting Current		A	4.9	5.9
*1) Wiring Spec.	Main Fuse (Circuit breaker) Current	A	20	20
	Power Cable	mm ²	4.0	
	*2) Limited wiring length	m	36	28

- *1) Wiring Spec.
Selected Sample
(Selected based on Japan Electrotechnical Standard and Codes Committee E0005)
- *2) Limited Wiring length
This is the wiring length in case voltage descent is less than 2%.
When the wiring length becomes long, please select the wiring of a more larger diameter.

10. SAFETY DEVICES

	Protection form	Model	
		AO * A12L	AO * A14L
Circuit protection	Current fuse (NEAR THE TERMINAL)	20A 250V	
		5A 250V	
	Current fuse (MAIN PRINTED CIRCUIT BOARD)	15A 250V	
		3.15A 250V	
Fan motor protection	Thermal protection program	OFF : 100 ⁺¹⁵ ₋₁₀ °C ON : 95 ⁺¹⁵ ₋₁₀ °C	
Compressor protection	Thermal protection program (COMPRESSOR TEMP.)	OFF : 110°C ON : After 40 minutes	
	Thermal protection program (DISCHARGE TEMP.)	OFF : 110°C ON : After 7 minutes	

OUTDOOR UNIT
AO*A12-14L

OUTDOOR UNIT
AO*A12-14L

OUTDOOR UNIT

2. SINGLE TYPE :

AO * B12LACL

AO * B12LALL

AO * B14LACL

AO * B14LALL

1. SPECIFICATIONS

OUTDOOR UNIT
AO*B12-14L

OUTDOOR UNIT
AO*B12-14L

Type				INVERTER HEATPUMP	
Model name				AO*B12LACL AO*B12LALL	AO*B14LACL AO*B14LALL
Power source				230V ~ 50Hz	
Available voltage range				198-264V ~ 50Hz	
Starting current			A	4.9	5.9
Fan	Airflow rate	Cooling	m³/h	1780	1910
		Heating		1630	1740
	Type × Q'ty			Propeller × 1	
	Motor output		W	54	
Sound pressure level		Cooling	dB(A)	47	49
		Heating		48	49
Heat exchanger type		Dimensions (H × W × D)	mm	546 × 876 × 18.2 546 × 842 × 18.2	
		Fin pitch		1.30	
		Rows x Stages		2 × 26	
		Pipe type		Copper	
		Fin type		Aluminium	
		Compressor	Type × Q'ty		Twin Rotary × 1
Motor output			W	1100	
Refrigerant		Type		R410A	
		Charge	g	1150	1250
Refrigerant oil		Type		POE	
Enclosure		Material		Steel sheet	
		Colour		Beige (10YR7.5/1.0NN)	
Dimensions (H×W×D)	Net		mm	578 × 790 × 300	
	Gross			648 × 910 × 380	
Weight	Net		kg(lb.)	40 (88)	40 (88)
	Gross			44 (97)	44 (97)
Connection pipe	Size	Liquid	mm	Φ 6.35 (Φ 1/4 in.)	
		Gas		Φ 9.52 (Φ 3/8 in.)	Φ 12.70 (Φ 1/2 in.)
	Method			Flare	
	Max. length		m	25(chargeless:15)	
	Max. height difference			15	
	Operation range		Cooling	°C	-10 to 46
Heating			-15 to 24		

Note :

Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB/19°CWB. and outdoor temperature of 35°CDB/24°CWB.


Heating : Indoor temperature of 20°CDB/15°CWB. and outdoor temperature of 7°CDB/6°CWB.

Pipe length : 7.5 m, Height difference : 0 m. (Outdoor unit - Indoor unit)


2. DIMENSIONS

■MODEL : AO*B12L, AO*B14L


(Unit : mm)

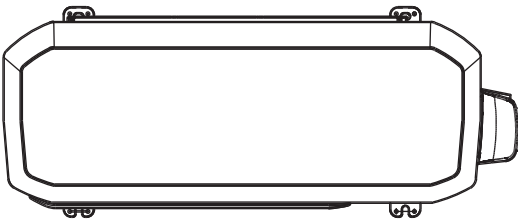


Top view

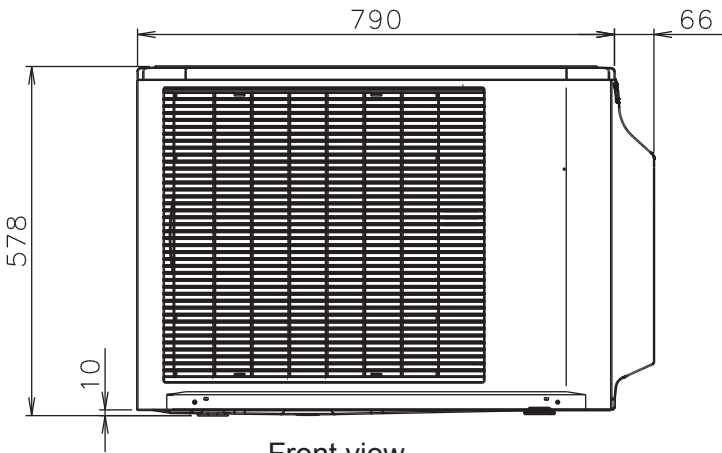


Front view

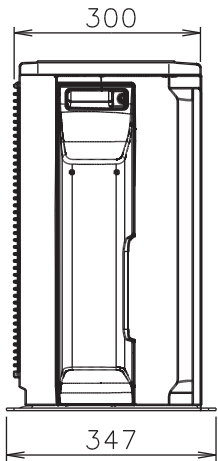

Side view

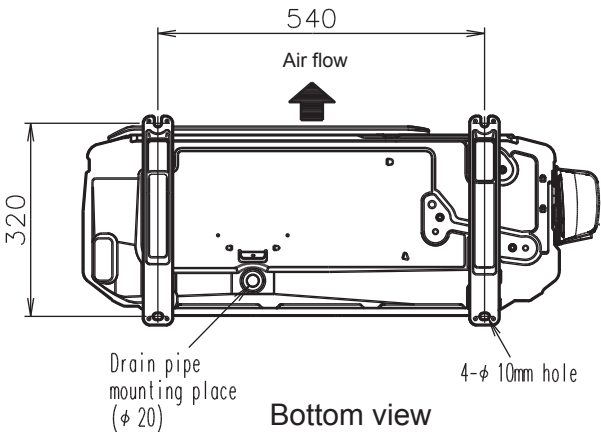

Bottom view





■MOUNTING POSITION

When there are obstacles at the back or front sides.

When there are obstacles at the back, side(s), and top.

When there are obstacles at the back, side with the installation of more than one unit.

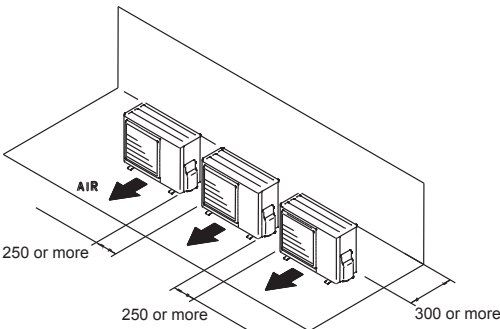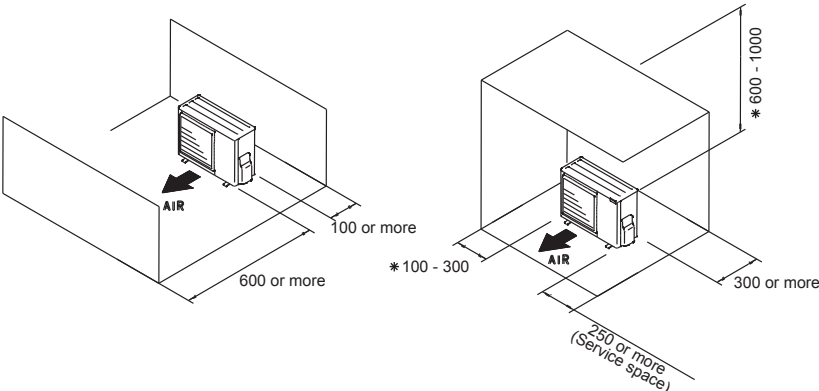


* If the space is larger that is stated, the condition will be the same as that are no obstacles.

OUTDOOR UNIT
AO*B12-14L

OUTDOOR UNIT
AO*B12-14L

3. REFRIGERANT CIRCUIT


■ MODEL : AO*B12L, AO*B14L

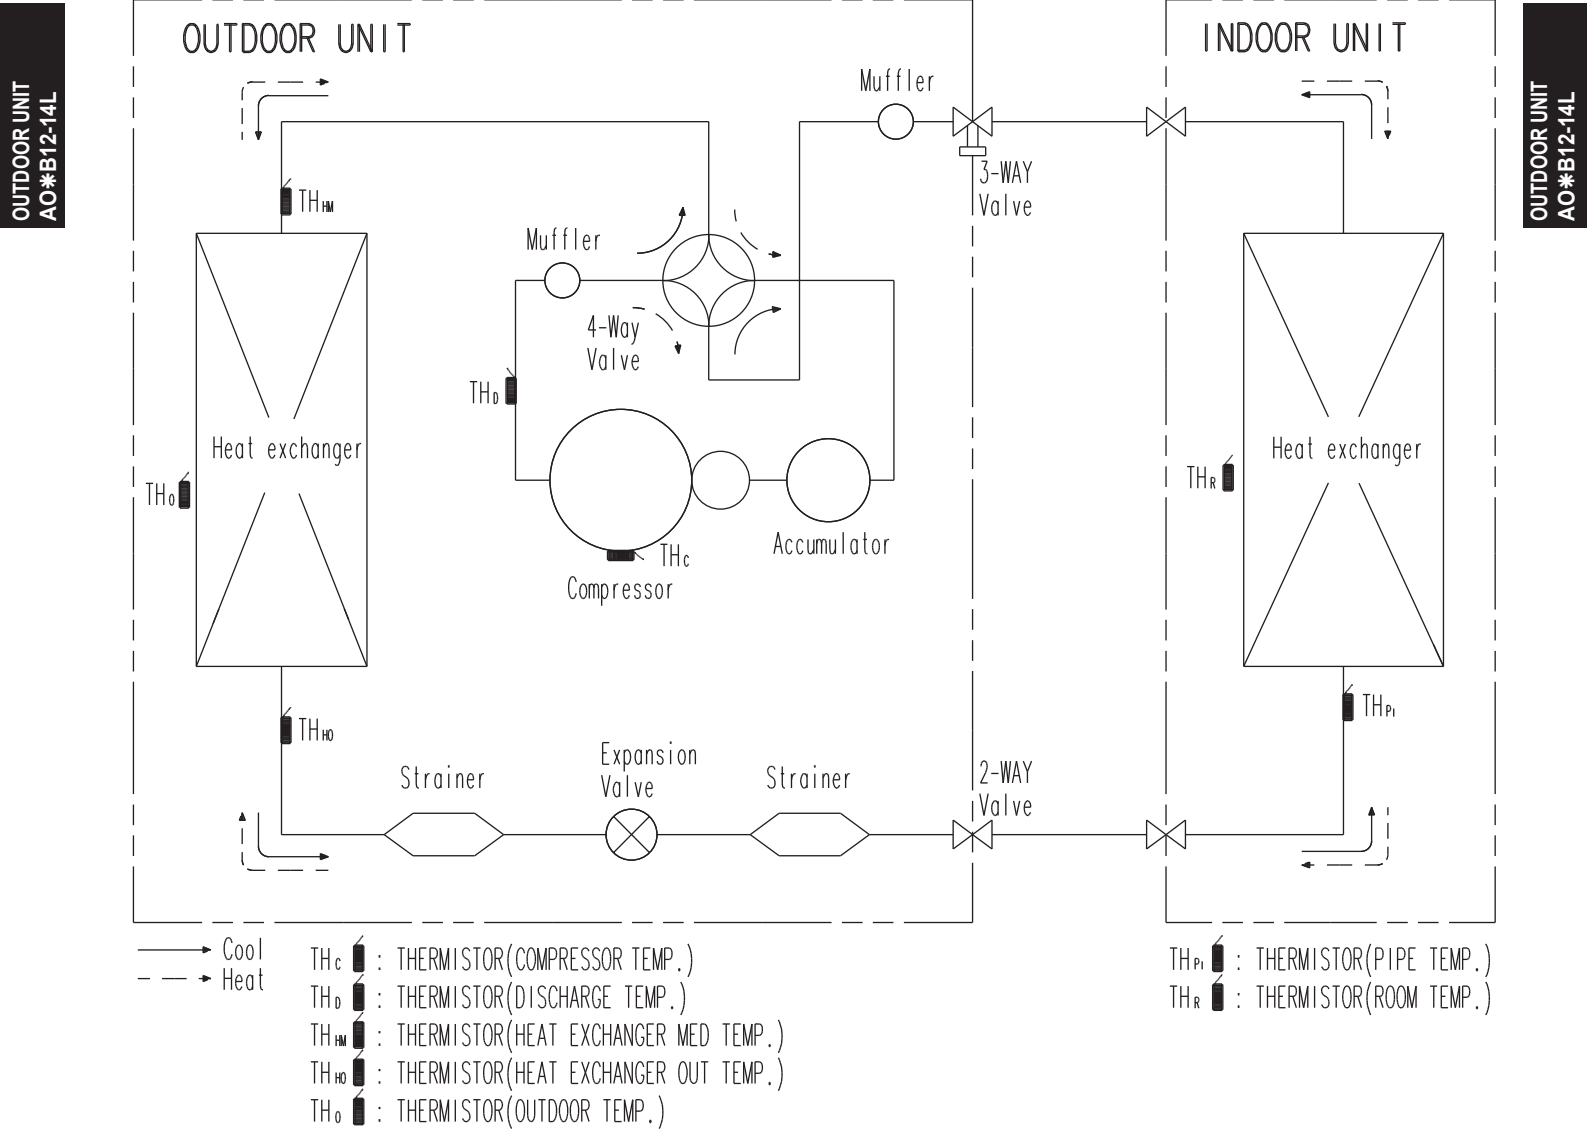

4. WIRING DIAGRAMS

■ MODEL : AO*B12L, AO*B14L

OUTDOOR UNIT
AO*B12-14L

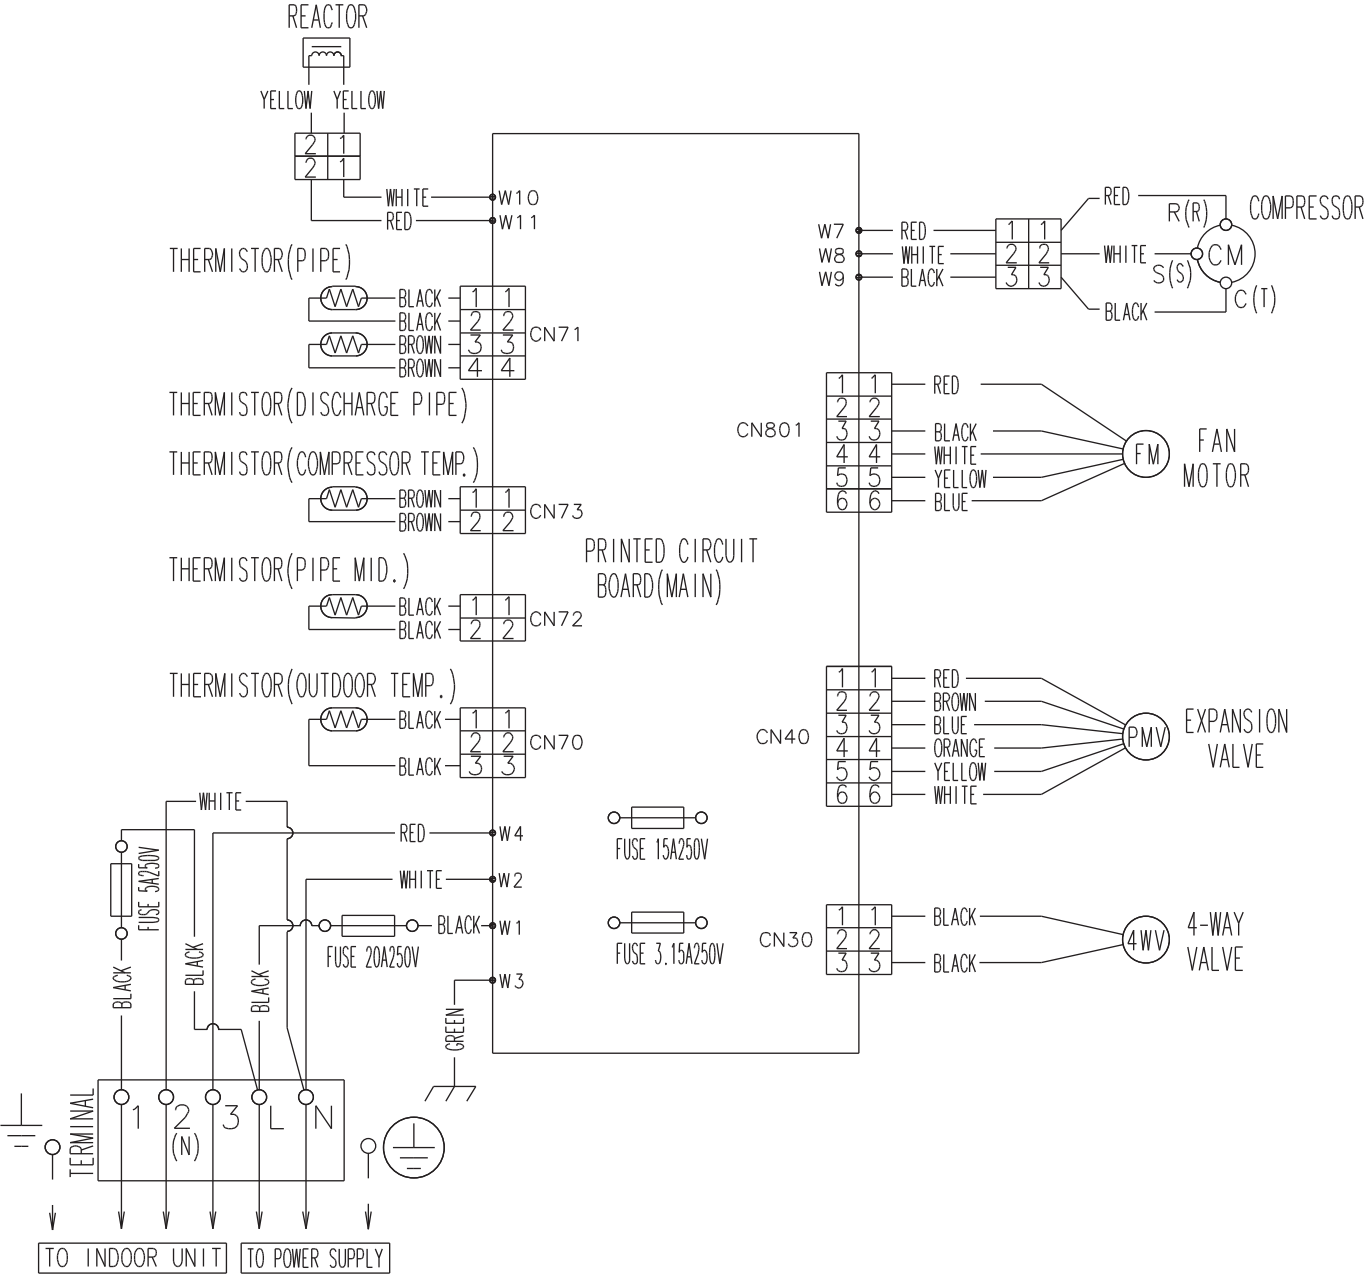

OUTDOOR UNIT
AO*B12-14L

5. CAPACITY COMPENSATION RATE FOR PIPE LENGTH AND HEIGHT DIFFERENCE

OUTDOOR UNIT
AO*B12-14L


MODEL : AO*B12L

OUTDOOR UNIT
AO*B12-14L

COOLING			Pipe length (m)					
			5	7.5	10	15	20	25
Height difference H (m)	* 1 Indoor unit is upper than outdoor unit.	15	-	-	-	0.903	0.894	0.867
		10	-	-	0.964	0.918	0.909	0.881
		7.5	-	0.988	0.968	0.922	0.912	0.885
		5	1.018	0.992	0.972	0.925	0.916	0.888
		0	1.026	1.000	0.980	0.933	0.923	0.895
	* 2 Indoor unit is under than outdoor unit	-5	1.026	1.000	0.980	0.933	0.923	0.895
		-7.5	-	1.000	0.980	0.933	0.923	0.895
		-10	-	-	0.980	0.933	0.923	0.895
		-15	-	-	-	0.933	0.923	0.895

HEATING			Pipe length (m)					
			5	7.5	10	15	20	25
Height difference H (m)	* 1 Indoor unit is upper than outdoor unit.	15	-	-	-	0.943	0.916	0.896
		10	-	-	1.010	0.943	0.916	0.896
		7.5	-	1.000	1.010	0.943	0.916	0.896
		5	0.954	1.000	1.010	0.943	0.916	0.896
		0	0.954	1.000	1.010	0.943	0.916	0.896
	* 2 Indoor unit is under than outdoor unit	-5	0.949	0.995	1.005	0.939	0.912	0.892
		-7.5	-	0.993	1.002	0.936	0.909	0.890
		-10	-	-	0.999	0.934	0.907	0.887
		-15	-	-	-	0.925	0.898	0.878

Height difference H


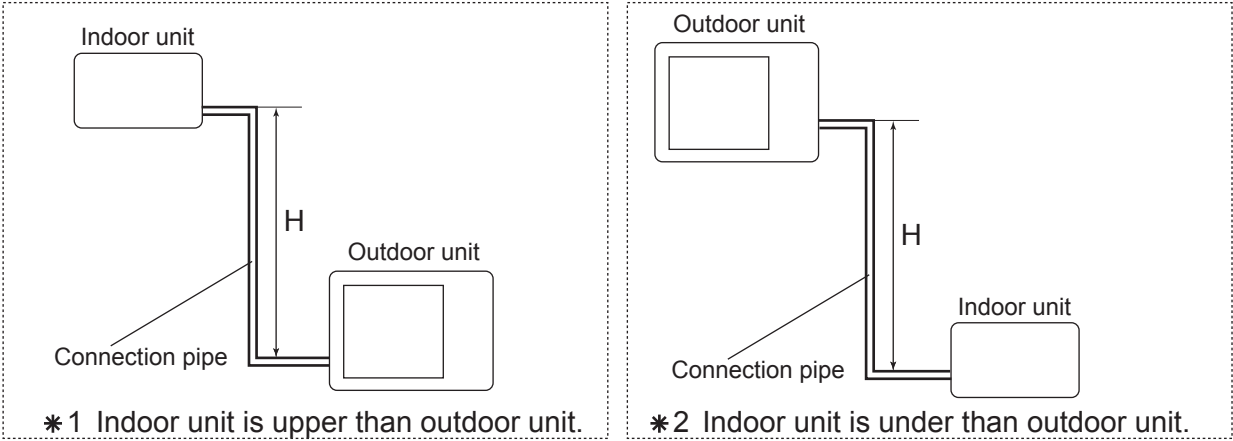


■ MODEL : AO*B14L

COOLING			Pipe length (m)					
			5	7.5	10	15	20	25
Height difference H (m)	* 1 Indoor unit is upper than outdoor unit.	15	-	-	-	0.953	0.950	0.947
		10	-	-	0.983	0.968	0.966	0.962
		7.5	-	0.988	0.987	0.972	0.970	0.966
		5	0.992	0.992	0.991	0.976	0.974	0.970
		0	1.000	1.000	0.999	0.984	0.982	0.978
	* 2 Indoor unit is under than outdoor unit	-5	1.000	1.000	0.999	0.984	0.982	0.978
		-7.5	-	1.000	0.999	0.984	0.982	0.978
		-10	-	-	0.999	0.984	0.982	0.978
		-15	-	-	-	0.984	0.982	0.978

HEATING			Pipe length (m)					
			5	7.5	10	15	20	25
Height difference H (m)	* 1 Indoor unit is upper than outdoor unit.	15	-	-	-	0.918	0.891	0.862
		10	-	-	0.981	0.918	0.891	0.862
		7.5	-	1.000	0.981	0.918	0.891	0.862
		5	0.994	1.000	0.981	0.918	0.891	0.862
		0	0.994	1.000	0.981	0.918	0.891	0.862
	* 2 Indoor unit is under than outdoor unit	-5	0.989	0.995	0.976	0.914	0.886	0.858
		-7.5	-	0.993	0.974	0.912	0.884	0.856
		-10	-	-	0.972	0.909	0.882	0.854
		-15	-	-	-	0.900	0.873	0.845

Height difference H

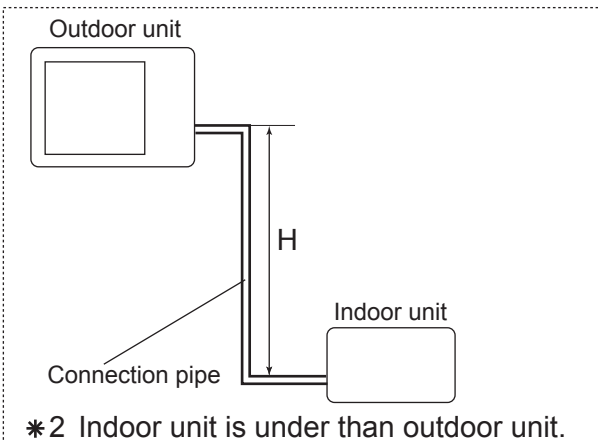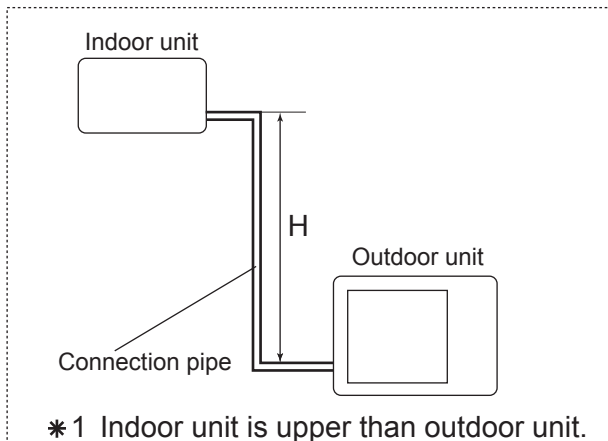

6. ADDITIONAL CHARGE CALCULATION

OUTDOOR UNIT
AO*B12-14L

OUTDOOR UNIT
AO*B12-14L

■ MODEL : AO*B12L

Refrigerant type		R410A
Refrigerant amount	g	1150

● REFRIGERANT CHARGE

Pipe length	m	~ 15	20	25	20g/m
Additional charge	g	0 (Chargeless)	+100	+200	

■ MODEL : AO*B14L

Refrigerant type		R410A
Refrigerant amount	g	1250

● REFRIGERANT CHARGE

Pipe length	m	~ 15	20	25	20g/m
Additional charge	g	0 (Chargeless)	+100	+200	

7. AIR FLOW

■ MODEL : AO*B12L

● COOLING

Number of rotations (r.p.m)	Air flow	
770	m ³ /h	1780
	l/s	494
	CFM	1048

● HEATING

Number of rotations (r.p.m)	Air flow	
700	m ³ /h	1630
	l/s	453
	CFM	959

■ MODEL : AO*B14L

● COOLING

Number of rotations (r.p.m)	Air flow	
820	m ³ /h	1910
	l/s	531
	CFM	1124

● HEATING


Number of rotations (r.p.m)	Air flow	
750	m ³ /h	1740
	l/s	483
	CFM	1024

8. OPERATION NOISE


8-1. NOISE LEVEL CURVE

MODEL : AO*B12L

COOLING

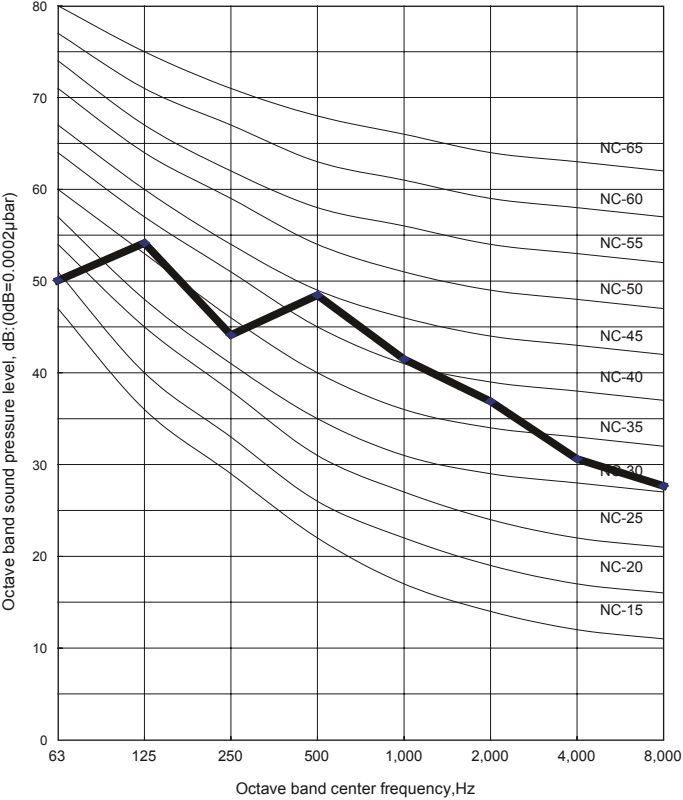


HEATING

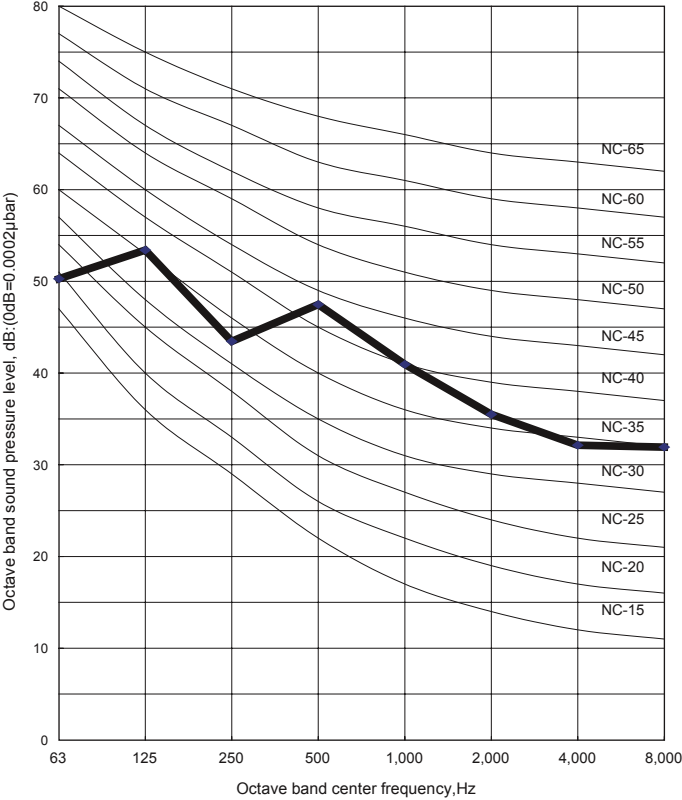


MODEL : AO*B14L

COOLING

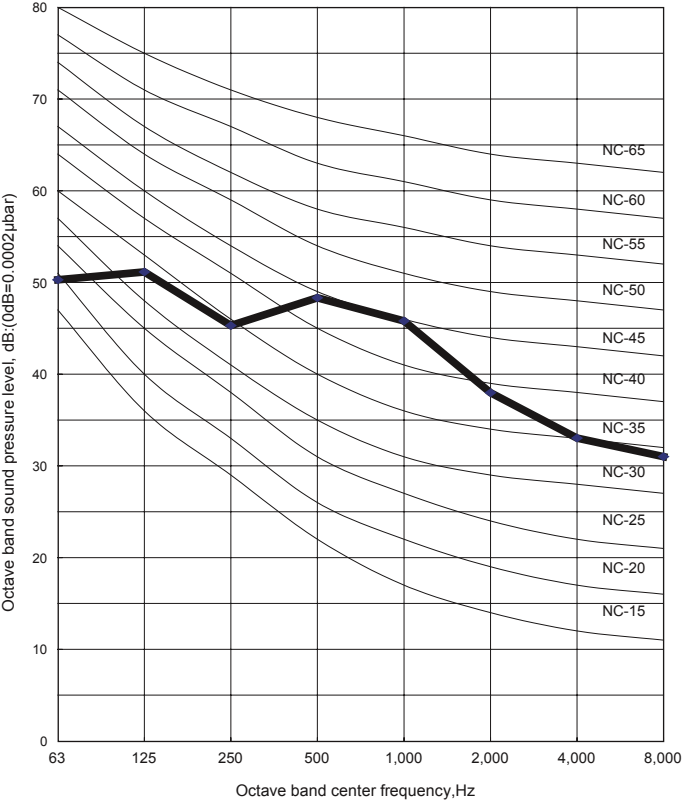



HEATING

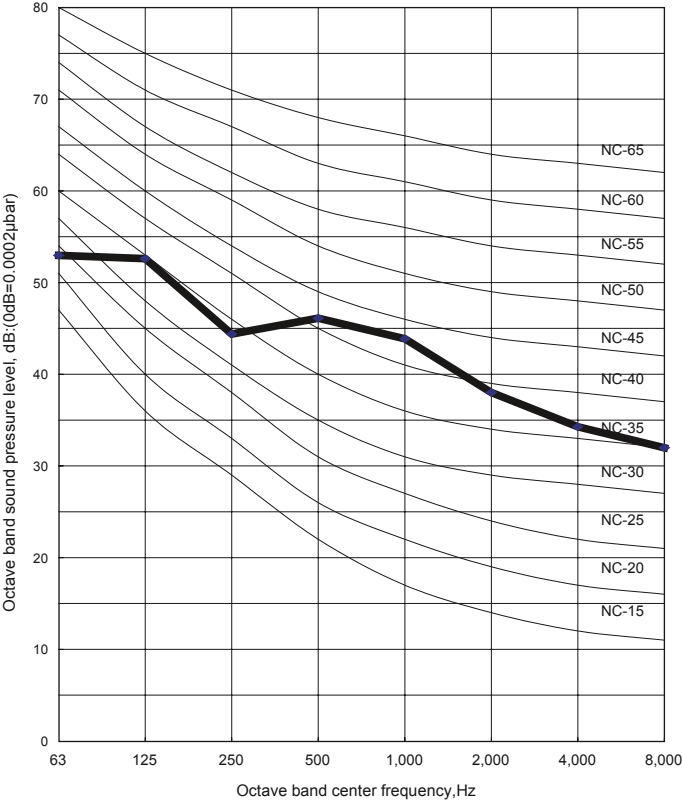

8-2. SOUND LEVEL CHECK POINT

OUTDOOR UNIT
AO*B12-14L

Air Flow

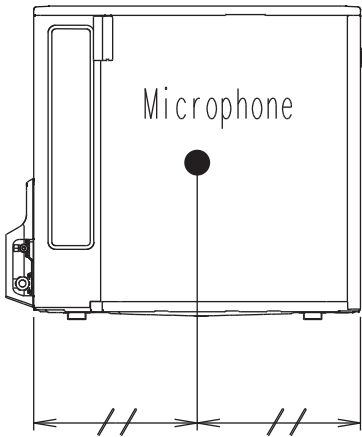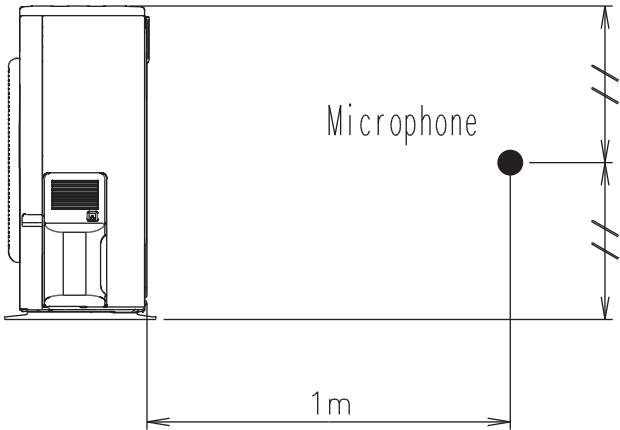

OUTDOOR UNIT
AO*B12-14L

9. ELECTRIC CHARACTERISTICS

Model name			AO* B12L	AO* B14L
Power supply	Voltage	V	230 ~	
	Frequency	Hz	50	
Max. operating current		A	10.0	12.5
Starting current		A	4.9	5.9
*1) Wiring spec.	Main fuse (Circuit breaker) current	A	20	20
	Power cable	mm ²	4.0	
	*2)Limited wiring length	m	36	28

- *1) Wiring spec.
Selected sample
(Selected based on Japan Electrotechnical Standard and Codes Committee E0005)
- *2) Limited wiring length
This is the wiring length in case voltage descent is less than 2%.
When the wiring length becomes long, please select the wiring of a more larger diameter.

OUTDOOR UNIT
AO*B12-14L

OUTDOOR UNIT
AO*B12-14L

10. SAFETY DEVICES

	Protection form	Model	
		AO *B12L	AO *B14L
Circuit protection	Current fuse (NEAR THE TERMINAL)	20A 250V	
		5A 250V	
	Current fuse (MAIN PRINTED CIRCUIT BOARD)	15A 250V	
		3.15A 250V	
Fan motor protection	Thermal protection program	OFF : 100 ⁺¹⁵ ₋₁₀ °C ON : 95 ⁺¹⁵ ₋₁₀ °C	
Compressor protection	Thermal protection program (COMPRESSOR TEMP.)	OFF : 110°C ON : After 40 minutes	
	Thermal protection program (DISCHARGE TEMP.)	OFF : 110°C ON : After 7 minutes	

OUTDOOR UNIT
AO*B12-14L

OUTDOOR UNIT
AO*B12-14L