

Product Categories

Ceiling Mounted Dehumidifier



Concealed installed for
Swimming Pool, Hotel,
Cellar, Garage, Office
Villa...

DJDD-201E/261E Ceiling Dehumidifier

- Ceiling mounted without taking floor space, ultrathinly design
- Micro-computer control, LCD digital display
- Humidity control accuracy to $\pm 1\%$, set freely
- Double sound insulation, silence running design
- Timed on/off setting



Model no.	DJDD-201E	DJDD-261E
Capacity	20 lt/24h	26 lt/24h
Air flow	250 CMH	300 CMH
Outlet pressure	80Pa	80Pa
Power supply	220v~1/50Hz	220v~1/50Hz
Rated current	1.8A	2.5A
Rated power	0.35Kw	0.45Kw
Working temperature	5°C~38°C	5°C~38°C
Applying space	10~25 Sqm.	20~35 Sqm.
Sound level	≤40dB	≤40dB
Net weight	26 kgs	27 kgs
Overall size(mm)	545x375x200	27 kgs
Flange size air inlet	212x160mm	212x160mm
Flange size air outlet	60x78mm	60x78mm



DJDD-301E/501E Ceiling Dehumidifier

- Ceiling mounted without taking floor space, ultrathinly design
- Micro-computer control, LCD digital display
- Humidity control accuracy to $\pm 1\%$, set freely
- Double sound insulation, silence running design
- Timed on/off setting

Model no.	DJDD-301E	DJDD-501E
Capacity	30 lt/24h	50 lt/24h
Air flow	500 m ³ /h	650 m ³ /h
Outlet pressure	100	100
Power supply	220v/~1/50Hz	220v/~1/50Hz
Rated current	2.5A	6.0A
Rated power	0.73Kw	0.91Kw
Working temperature	5°C~38°C	5°C~38°C
Applying space	40~50 m ²	50~60 m ²
Sound level	≤45dB	≤45dB
Net weight	53 kgs	60 kgs
Overall size	630x735x220mm	690x760x220mm
Flange size air inlet	480x165mm	480x165mm
Flange size air outlet	240x155mm	240x155mm




DJDD-381E/581E Ceiling Dehumidifier

- Ceiling mounted without taking floor space, ultrathinly design
- Micro-computer control, LCD digital display
- Humidity control accuracy to $\pm 1\%$, set freely
- Double sound insulation, silence running design
- Timed on/off setting

Model no.	DJDD-381E	DJDD-581E
Capacity	38 lt/24h	58 lt/24h
Air flow	500 m ³ /h	650 m ³ /h
Outlet pressure	100Pa	100Pa
Power supply	220v/~1/50Hz	220v/~1/50Hz
Rated current	2.5A	3.5A
Rated power	0.73Kw	0.91Kw
Working temperature	5°C~38°C	5°C~38°C
Applying space	40~50m ²	50~60 m ²
Sound level	≤50dB	≤50dB
Net weight	54 kgs	56 kgs
Overall size	660x630x420mm	660x630x420mm
Flange size air inlet	440x340mm	440x340mm
Flange size air outlet	265x244mm	265x244mm

DJDD-901E/1301E Ceiling Dehumidifier

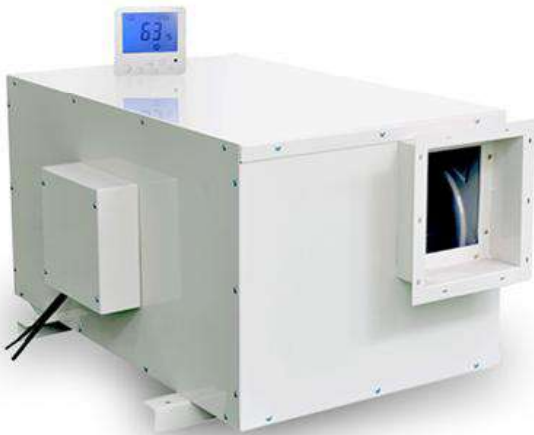

- Ceiling mounted without taking floor space, ultrathinly design
- Micro-computer control, LCD digital display
- Humidity control accuracy to $\pm 1\%$, set freely
- Double sound insulation, silence running design
- Timed on/off setting

Model no.	DJDD-901E	DJDD-1301E
Capacity	90 lt/24h	130 lt/24h
Air flow	800 m ³ /h	900 m ³ /h
Outlet pressure	150	150
Power supply	220v/~1/50Hz	220v/~1/50Hz
Rated current	7.5A	9.0A
Rated power	1.5Kw	1.7Kw
Working temperature	5°C~38°C	5°C~38°C
Applying space	90~120 m ²	100~130 m ²
Sound level	≤50dB	≤50dB
Net weight	70 kgs	74 kgs
Overall size	935x630x480mm	935x630x480mm
Flange size air inlet	440x340mm	440x340mm
Flange size air outlet	265x244mm	265x244mm

DJDD-1381E/1501E Ceiling Dehumidifier



- Ceiling mounted without taking floor space, ultrathinly design
- Micro-computer control, LCD digital display
- Humidity control accuracy to $\pm 1\%$, set freely
- Double sound insulation, silence running design
- Timed on/off setting

Model no.	DJDD-1381E	DJDD-1501E
Capacity	138 lt/24h	150 lt/24h
Air flow	1000 m ³ /h	1200 m ³ /h
Outlet pressure	150	180
Power supply	220v/~1/50Hz	220v/~1/50Hz
Rated current	10.0A	10.0A
Rated power	2.1Kw	2.2Kw
Working temperature	5°C~38°C	5°C~38°C
Applying space	140~160 m ²	130~170 m ²
Sound level	≤55dB	≤55dB
Net weight	77 kgs	78 kgs
Overall size	935x630x480mm	935x630x480mm
Flange size air inlet	440x340mm	440x340mm
Flange size air outlet	265x244mm	265x244mm



DJDD-1681E/2481E Ceiling Dehumidifier

- Ceiling mounted without taking floor space, ultrathinly design
- Micro-computer control, LCD digital display
- Humidity control accuracy to $\pm 1\%$, set freely
- Double sound insulation, silence running design
- Timed on/off setting

Model no.	DJDD-1681E	DJDD-2481E
Capacity	168 lt/24h	240 lt/24h
Air flow	2000 m ³ /h	2400 m ³ /h
Outlet pressure	200	200
Power supply	380v/~3N/50Hz	380v/~3N/50Hz
Rated input current	6.0A	7.2A
Rated input power	3Kw	4Kw
Working temperature	5°C~38°C	5°C~38°C
Applying space	150~200 m ²	180~280 m ²
Sound level	≤60dB	≤60dB
Net weight	125 kgs	130 kgs
Overall size	1105x940x500mm	1105x940x500mm
Flange size air inlet	690x350mm	690x350mm
Flange size air outlet	655x300mm	655x300mm

DJDD-3881E/4881E Ceiling Dehumidifier

- Ceiling mounted without taking floor space, ultrathinly design
- Micro-computer control, LCD digital display
- Humidity control accuracy to $\pm 1\%$, set freely
- Double sound insulation, silence running design
- Timed on/off setting

Model no.	DJDD-3881E	DJDD-4881E
Capacity	360 lt/24h	480 lt/24h
Air flow	4000 m ³ /h	5600 m ³ /h
Outlet pressure	200	200
Power supply	380v/~3N/50Hz	380v/~3N/50Hz
Rated input current	13.5A	14.5A
Rated input power	5.1Kw	6.73Kw
Working temperature	5°C~38°C	5°C~38°C
Applying space	280~350 m ²	350~500 m ²
Sound level	≤65dB	≤65dB
Net weight	215 kgs	250 kgs
Overall size	1490x1200x705mm	1490x1200x705mm
Flange size air inlet	1175x630mm	1175x630mm
Flange size air outlet	1135x260mm	1135x260mm