



SPLIT TYPE ROOM AIR CONDITIONER WALL MOUNTED type INVERTER

SERVICE MANUAL

Models	Indoor unit	Outdoor unit
	ASY13PSA-W	A0Y13PNA

C O N T E N T S

SPECIFICATIONS	1
OUTLINE AND DIMENSIONS	3
REFRIGERANT SYSTEM DIAGRAM	4
CIRCUIT DIAGRAM	5
INDOOR PCB CIRCUIT DIAGRAM	6
OUTDOOR PCB CIRCUIT DIAGRAM	7
REMOTE CONTROL UNIT CIRCUIT DIAGRAM	8
INDOOR P.C. BOARD LAYOUTS	9
OUTDOOR P.C. BOARD LAYOUTS	11
DISASSEMBLY ILLUSTRATION	16
PARTS LIST	19

S P E C I F I C A T I O N S

TYPE	COOL & HEAT INVERTER
INDOOR UNIT	ASY13PSA-W
OUTDOOR UNIT	ADY13PNA
COOLING CAPACITY (): Range (kW)	3.7 (1.03 - 4.0)
HEATING CAPACITY (): Range (kW)	4.85 (0.8 - 6.1)

ELECTRICAL SPECIFICATIONS

POWER SUPPLY (V)		220 - 230
FREQUENCY (Hz)		50
RUNNING CURRENT (A)	COOLING	6.8 - 6.5 <Max. 8.0>
	HEATING	7.4 - 7.1 <Max. 10.0>
INPUT (): Range (kW)	COOLING	1.48 (0.35 - 1.82)
	HEATING	1.61 (0.33 - 2.28)
EER (kW/kW)	COOLING	2.50
	HEATING	3.01
MOISTURE REMOVAL (ℓ/hr)		1.8
AIR CIRCULATION-Hi (m³/hr)	COOLING	610
	HEATING	560

COMPRESSOR

TYPE	Rotary type, Inverter, 2 pole. Three phase, Induction motor
CODE	2PV132NTBB02
REFRIGERANT R-22 (g)	950

FAN MOTOR

POWER SUPPLY		(V)	220 - 230
INDOOR UNIT	HI-SPEED (r.p.m.)	COOLING	1.320
		HEATING	1.420
	MED-SPEED (r.p.m.)	COOLING	1.210
		HEATING	1.260
	LO-SPEED (r.p.m.)	COOLING	1.100
		HEATING	1.150
OUTDOOR UNIT	(r.p.m.)		770

DIMENSIONS

INDOOR UNIT	HEIGHT x WIDTH x DEPTH	280 mm x 815 mm x 179 mm
OUTDOOR UNIT	HEIGHT x WIDTH x DEPTH	535 mm x 695 mm x 250 mm

WEIGHT

INDOOR UNIT	GROSS / NET (kg)	11 / 9
OUTDOOR UNIT	GROSS / NET (kg)	37 / 34

NOISE LEVEL

		COOLING	HEATING
INDOOR UNIT	HI-SPEED (dB)	43	42
	MED-SPEED (dB)	41	39
	LO-SPEED (dB)	38	36
	SUPER QUIET (dB)	34	30
OUTDOOR UNIT (dB)		47 - 49	48 - 50

ADDITIONAL CHARGE OF REFRIGERANT

Refrigerant suitable for a piping length of 5 m is charged in the outdoor unit at the factory.

When the piping is longer than 5 m, additional charging is necessary. For the additional amount, see the table below.

Table







Pipe length	5 m	7 m	10 m
Additional refrigerant	None	32 g	80 g

Between 5 m and 10m, when using a connection pipe other than that in the table, charge additional refrigerant with 16 g/1 m as the criteria.


{ The maximum length of the piping is 10m. If the units are further apart than this, correct operation can not be guaranteed. }

OUTLINE AND DIMENSIONS


(Unit : mm)

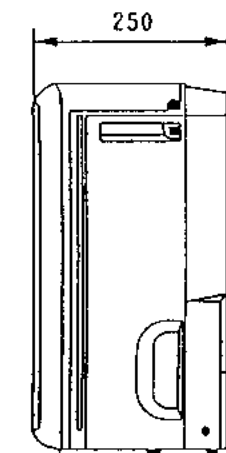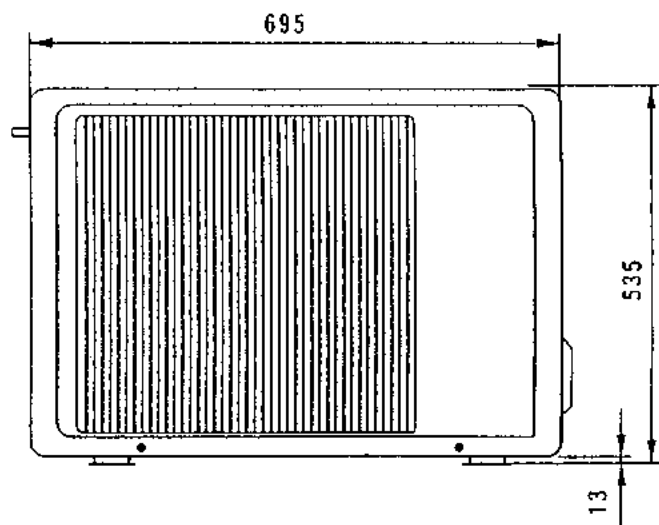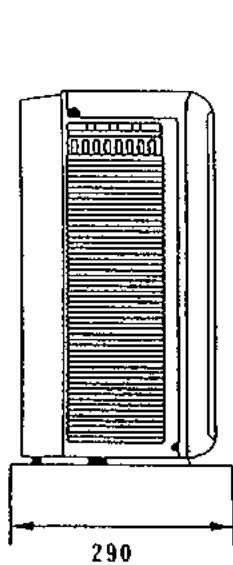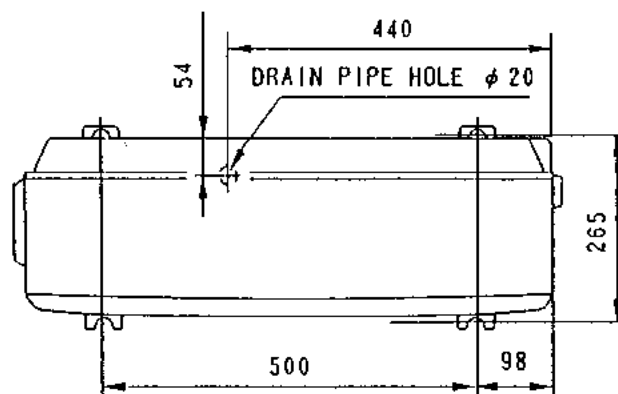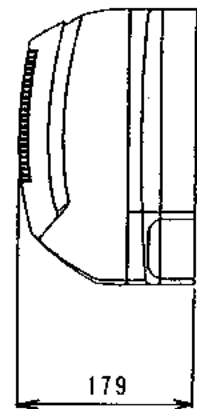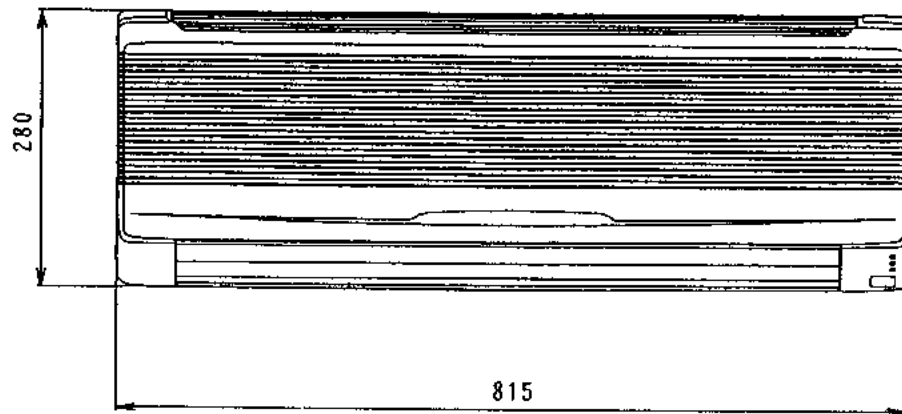


REFRIGERANT SYSTEM DIAGRAM

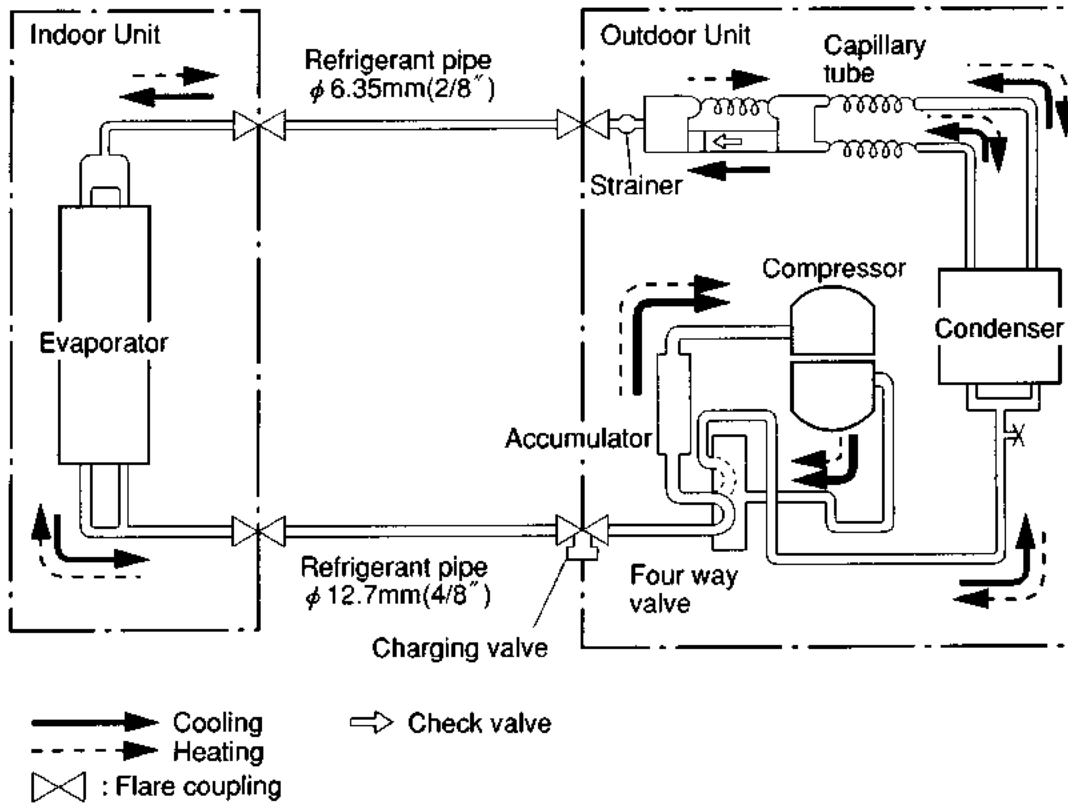


INDOOR UNIT

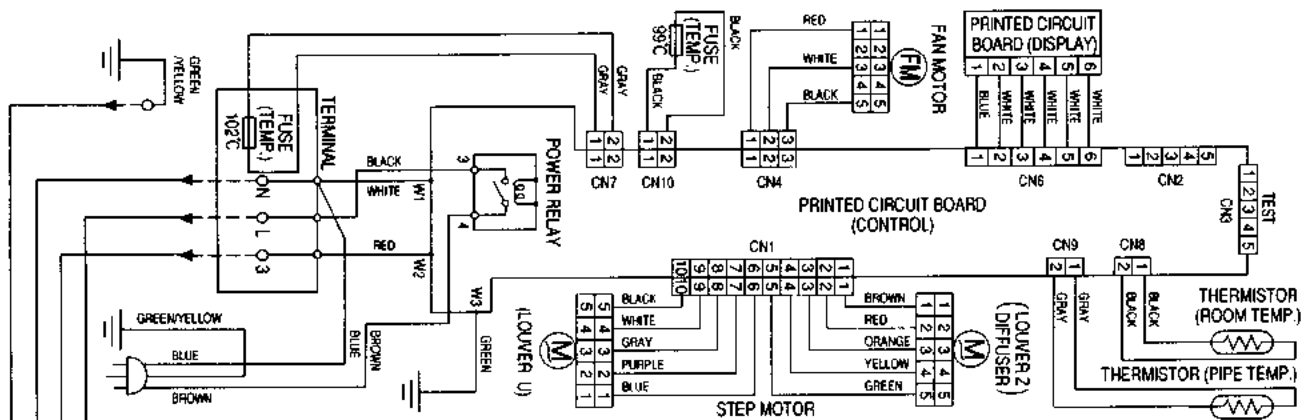

CONFIDENTIAL

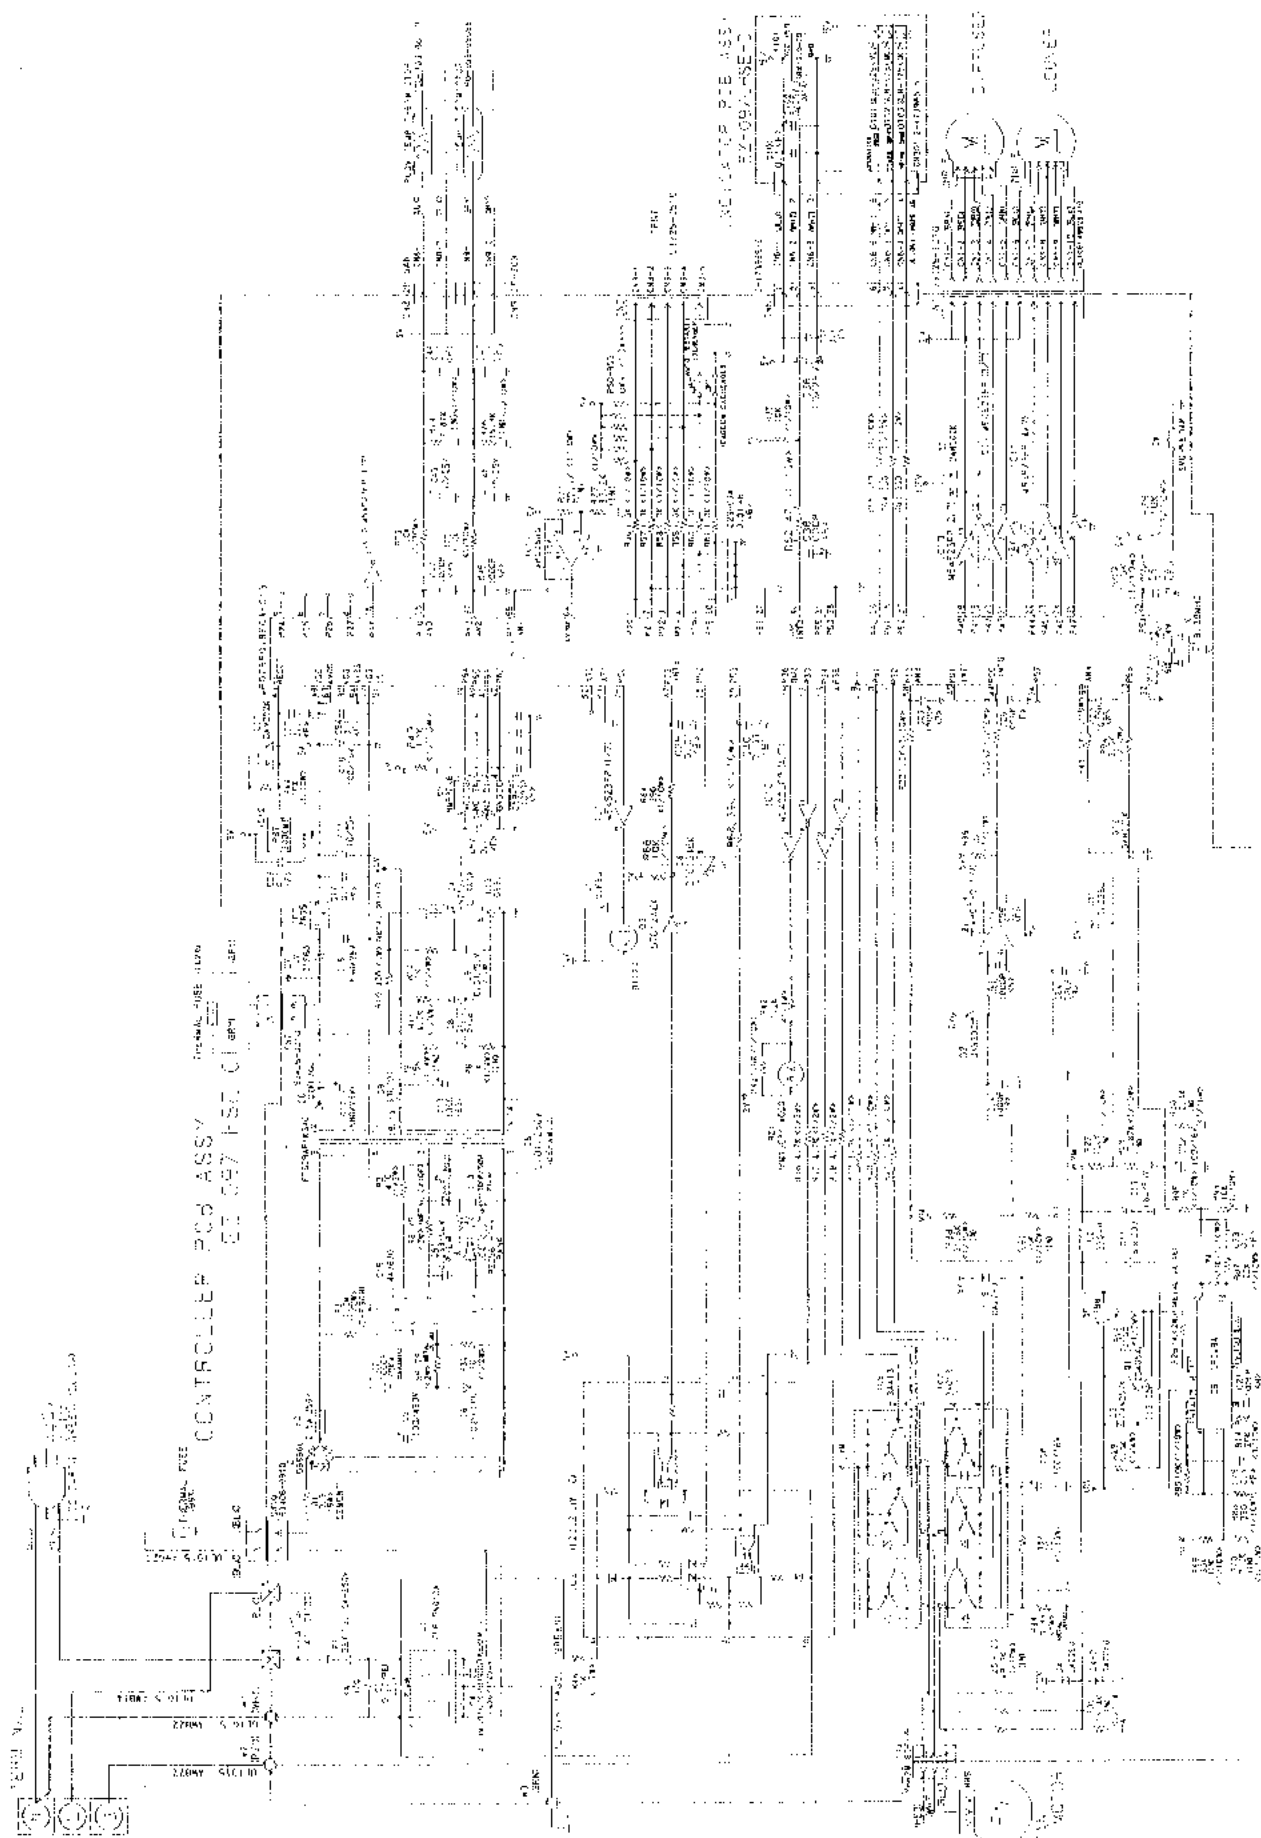

OUTDOC

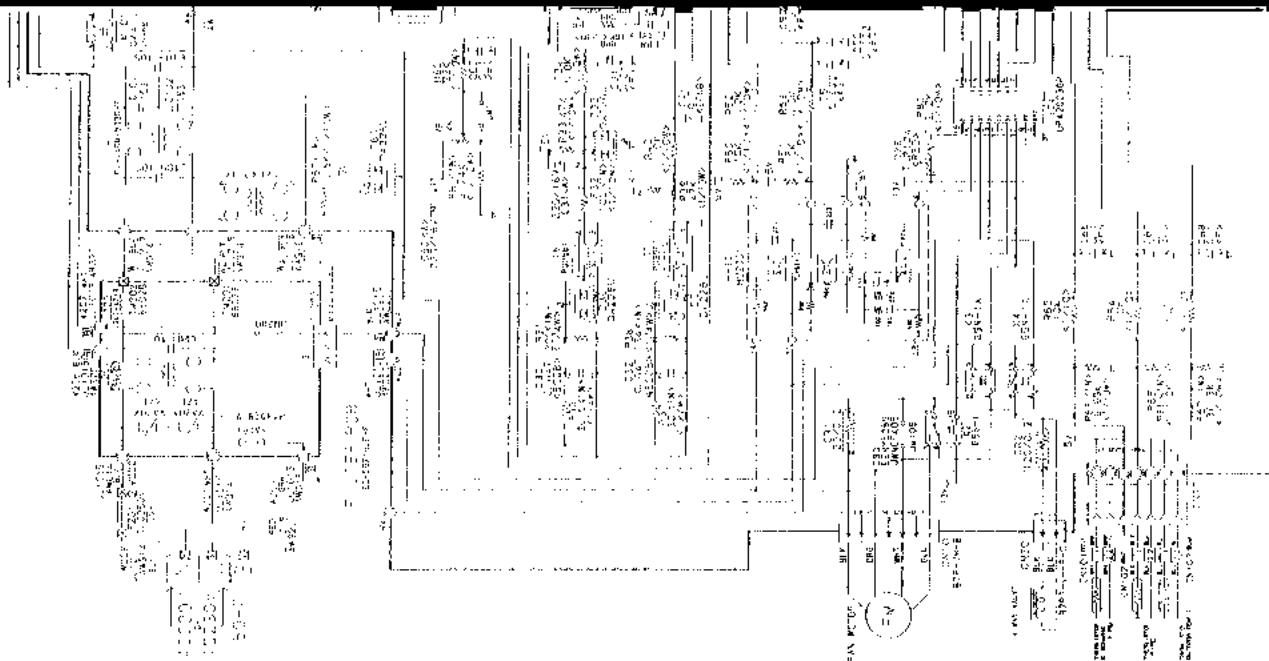

FUNCTION CHANGE WITH A JUMPER WIRE




No.	KEY FUNCTION
K1	START/STOP
K2	MASTER CONTROL
K3	SET TEMP. (+), SET TIME (+)
K4	SET TEMP. (-), SET TIME (-)
K5	FAN CONTROL
K6	
K7	
K8	LAUNDRY/POWER SELECT
K9	POWER SELECT/DASH (LONG SIGNAL)
K10	
K11	WIND DIRECTION
K12	TIMER
K13	HOUR TIMER/SLEEP/DASH
K14	TIMER ADJUST
K15	TEST RUN
K16	SWING(LONG SIGNAL)/SWING (SHORT SIGNAL)
SW1	ACL

INDOOR P. C. BOARD LAYOUTS


Inverter PCB Assembly

(Viewed from the component side)

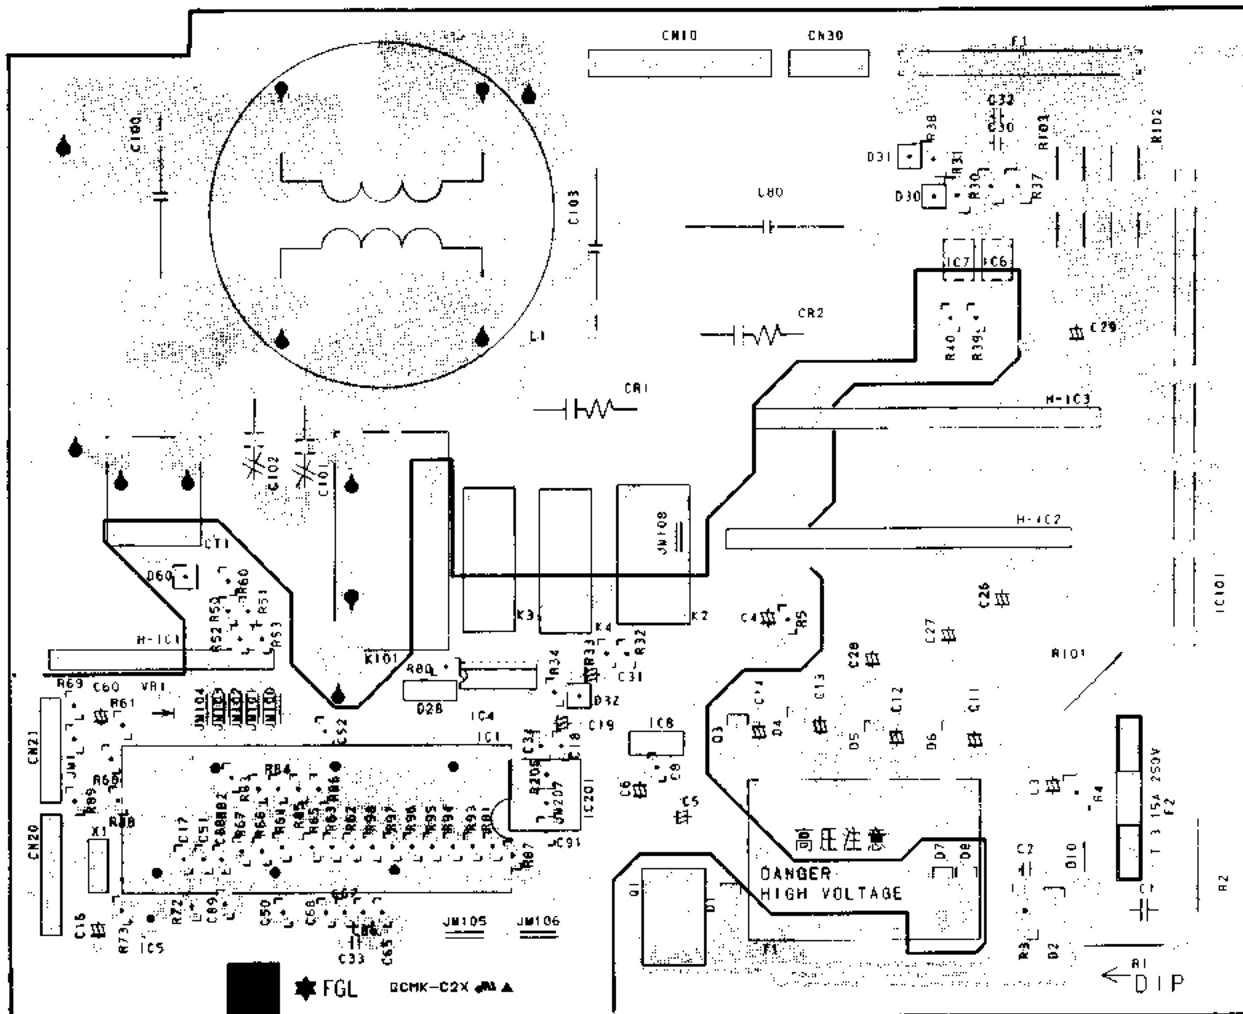


Indicator PCB Assembly


(Viewed from the component side)

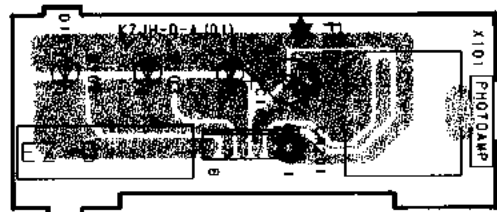

(Viewed form the solder side)

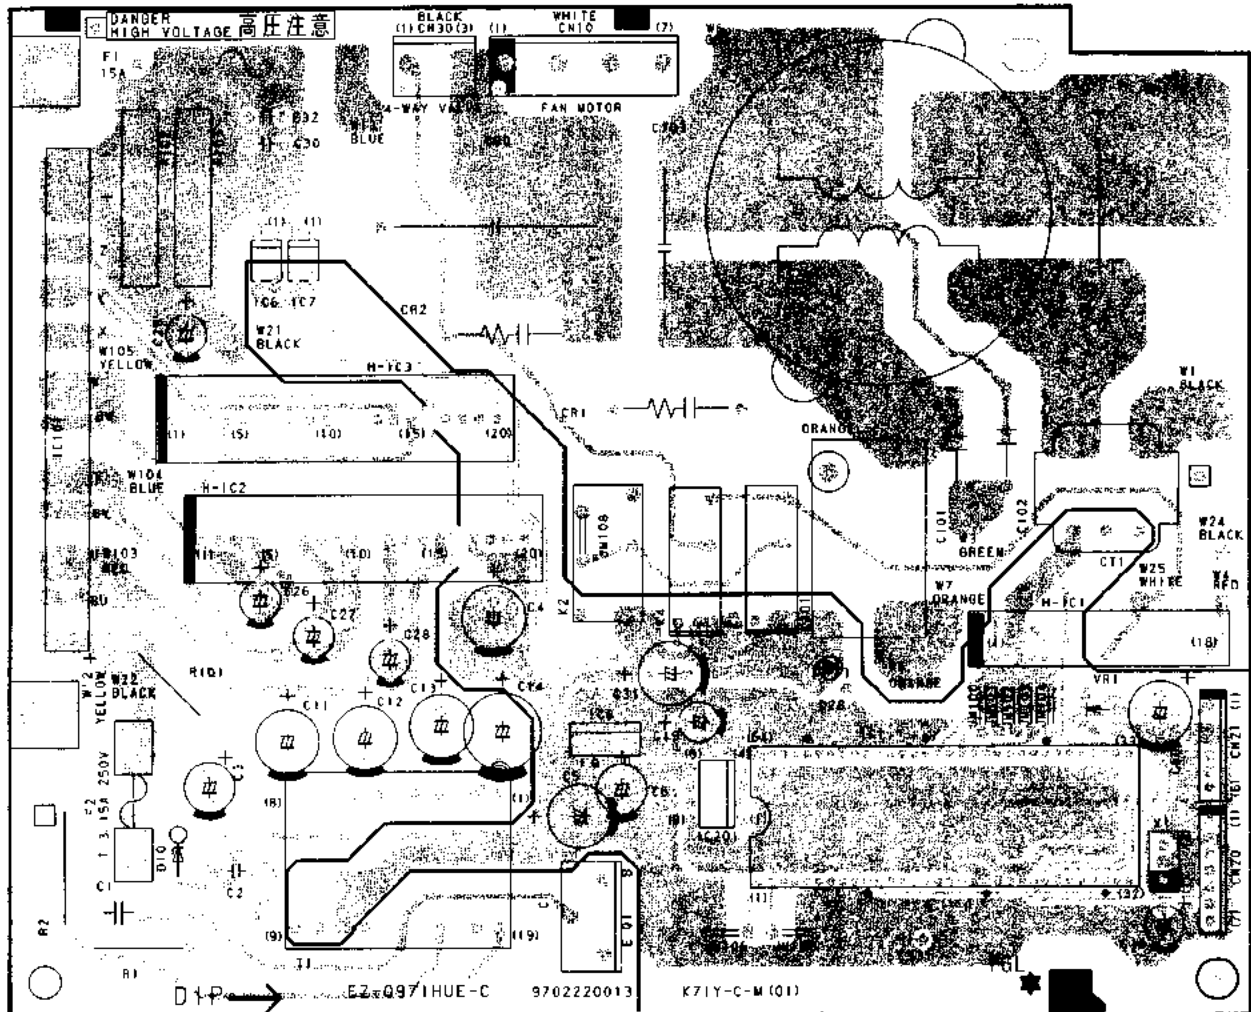


(Viewed form the solder side)

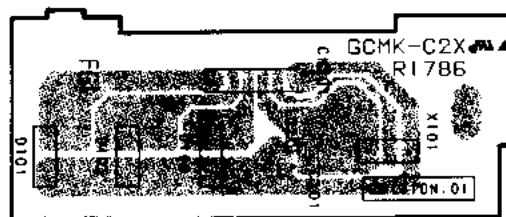


OUTDOOR P. C. BOARD LAYOUTS

(Viewed from the component side)

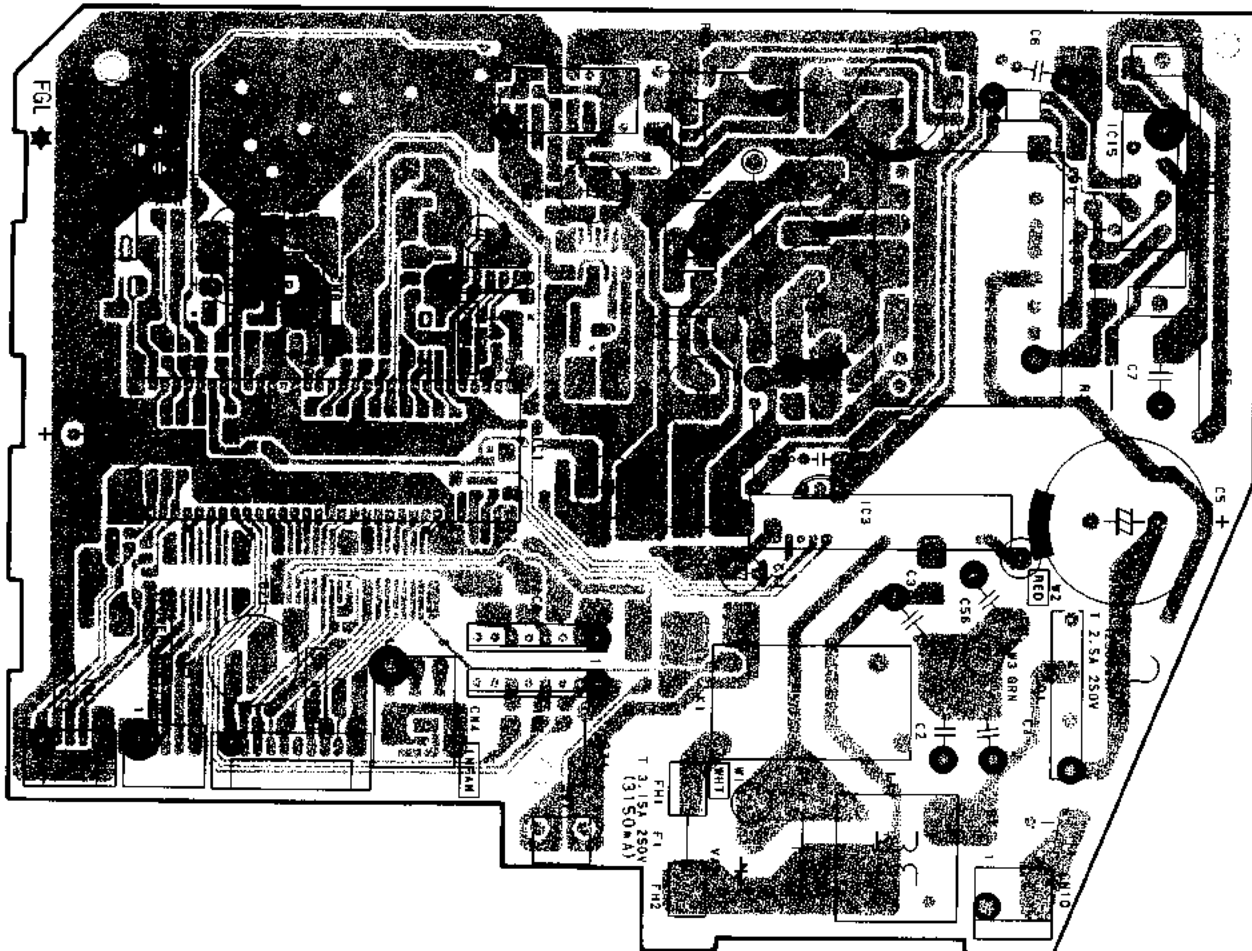


Active Filter PCB Assembly

(Viewed from the component side)

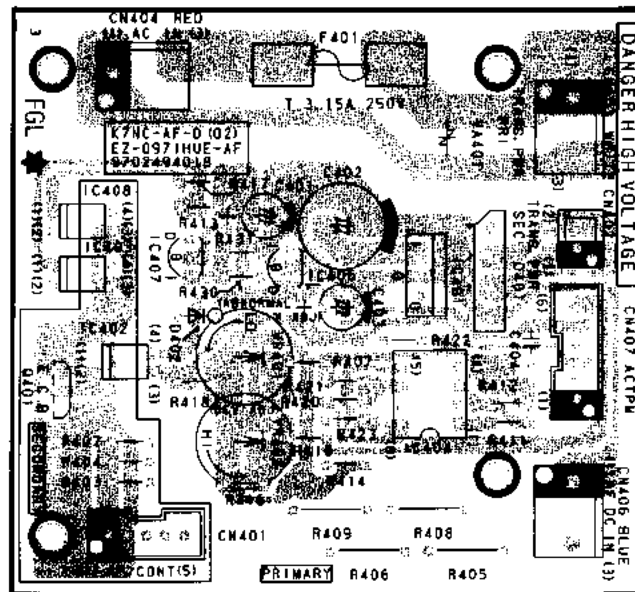


(Viewed from the solder side)

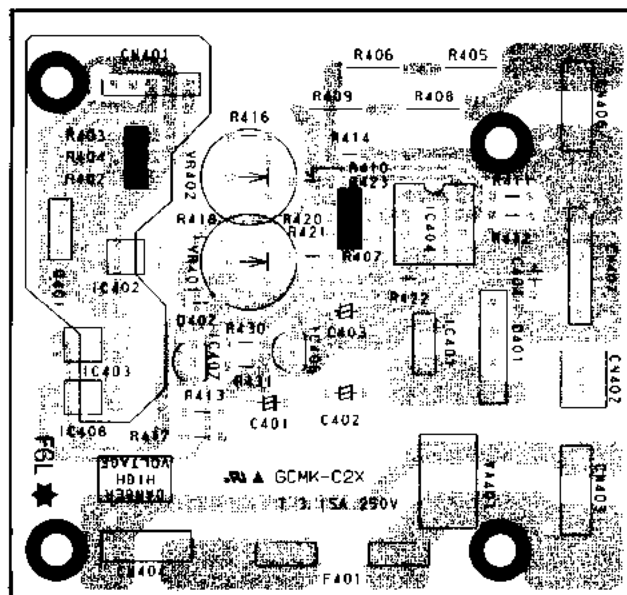



Filter PCB Assembly

(Viewed from the component side)

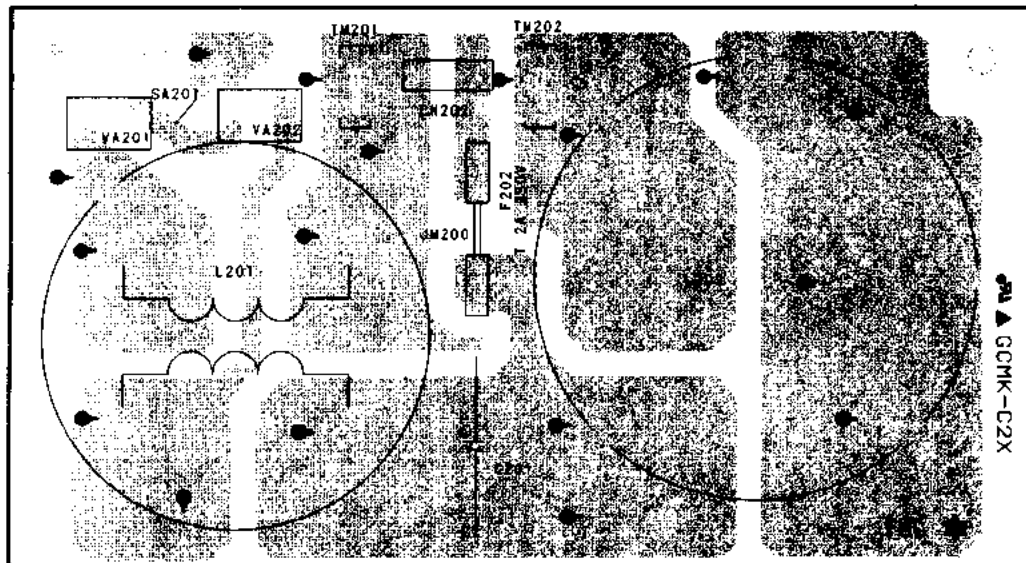

(Viewed form the solder side)

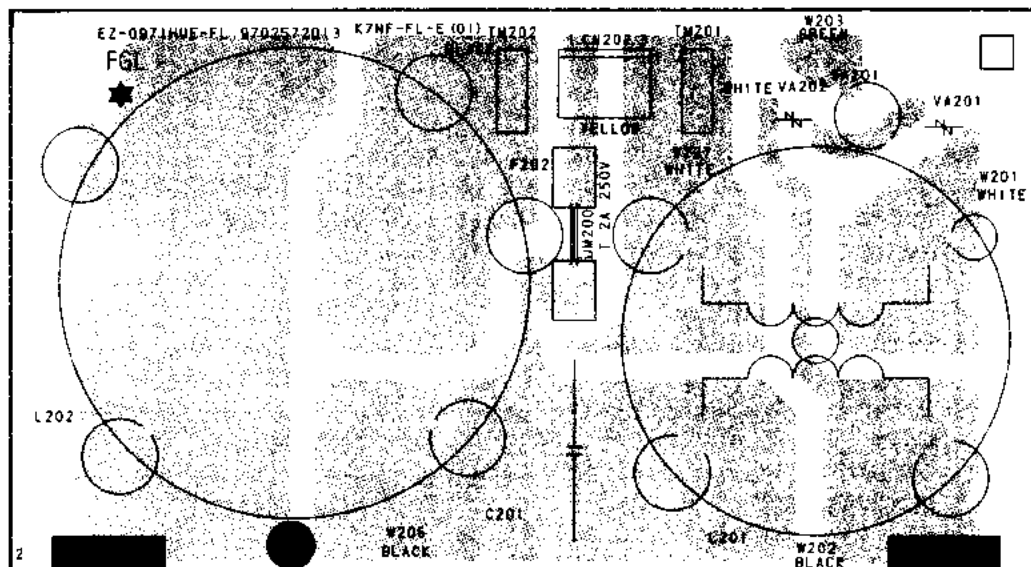

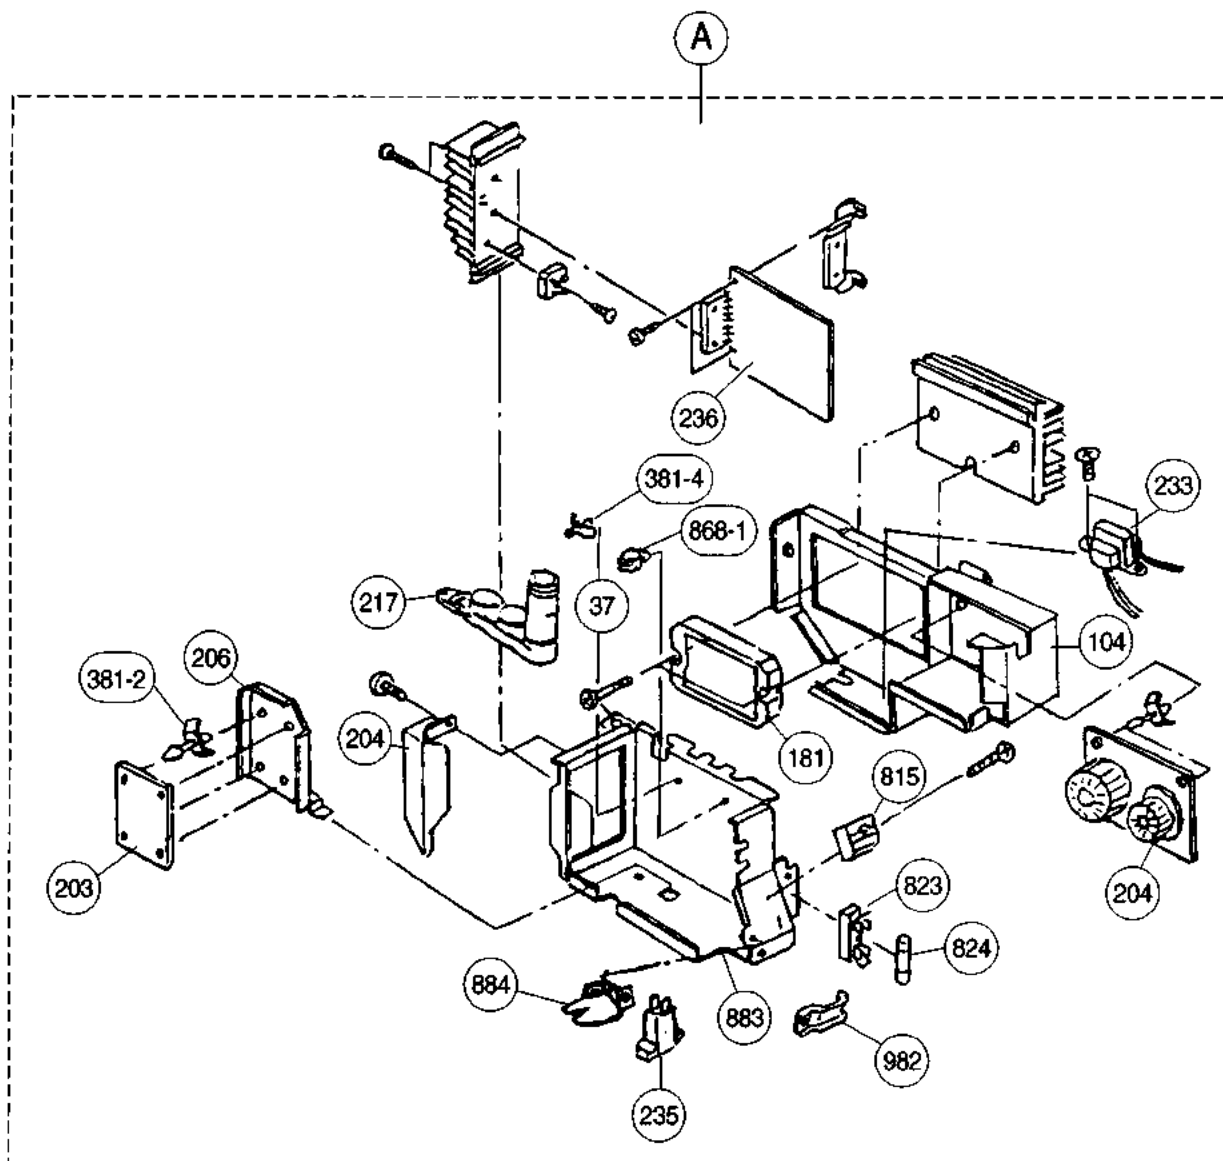



Replace the part having Ref.No.203 or 181 as stated in the parts list.


When necessary, replace the whole assembly having part No.9702486013 (portion enclosed by dotted lines in the above illustration) since this assembly has been precisely adjusted before shipment from the factory.

Ref.No	Description	Part No.
203	PCB ASSY(A-F)	9702490010
181	ACTPM	9702612016
A	INVERTER ASSY	9702486013

DISASSEMBLY ILLUSTRATION

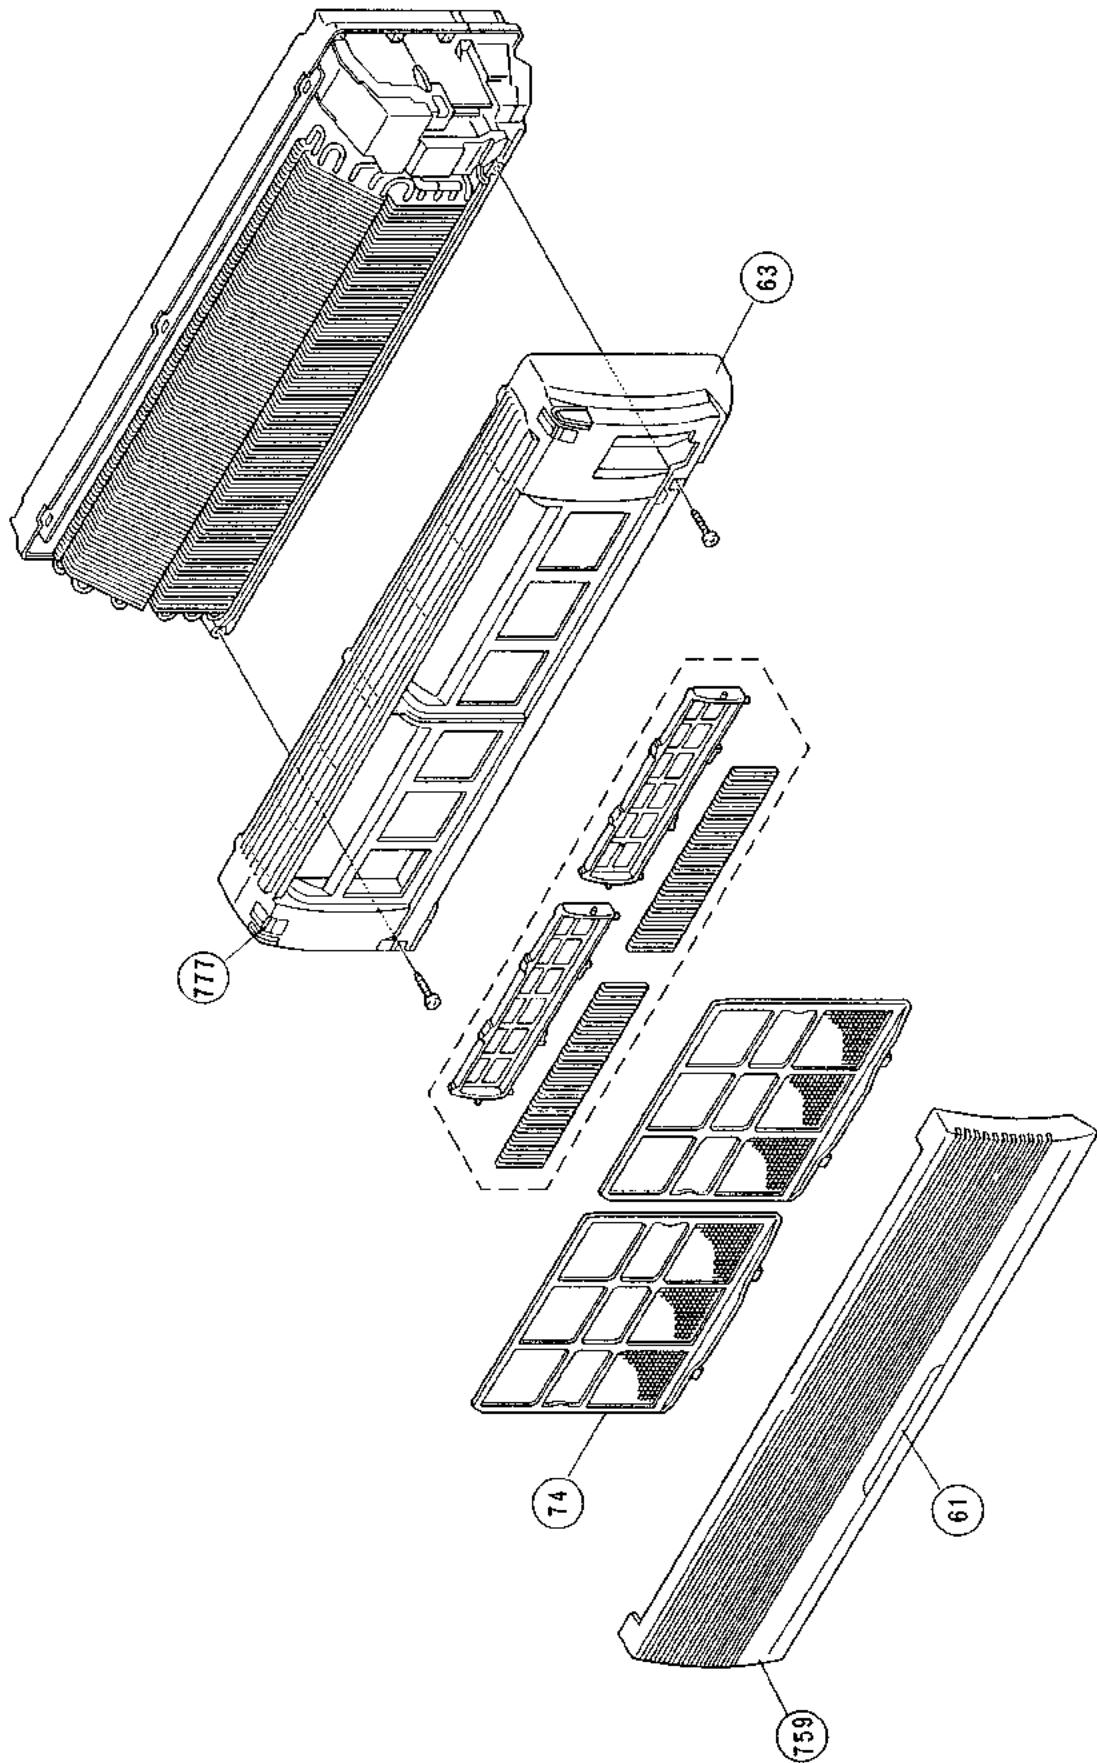

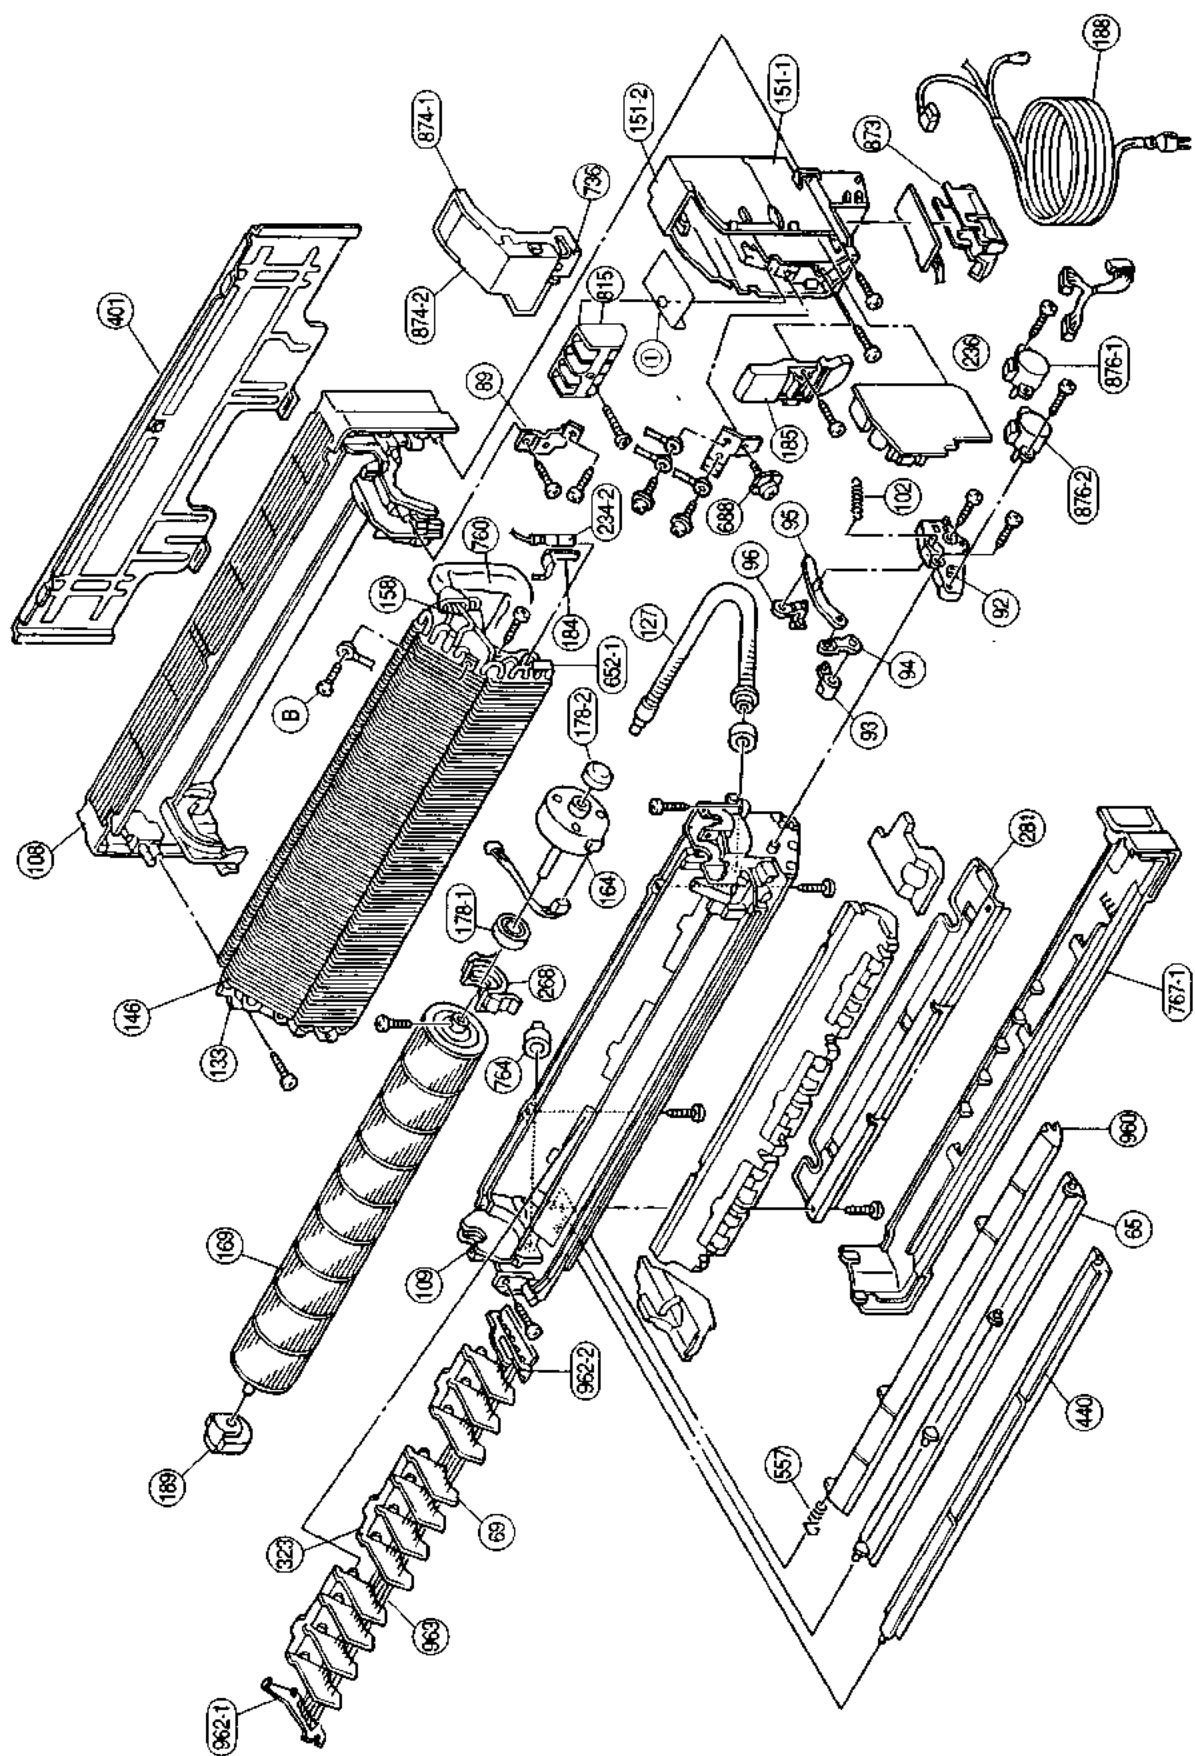

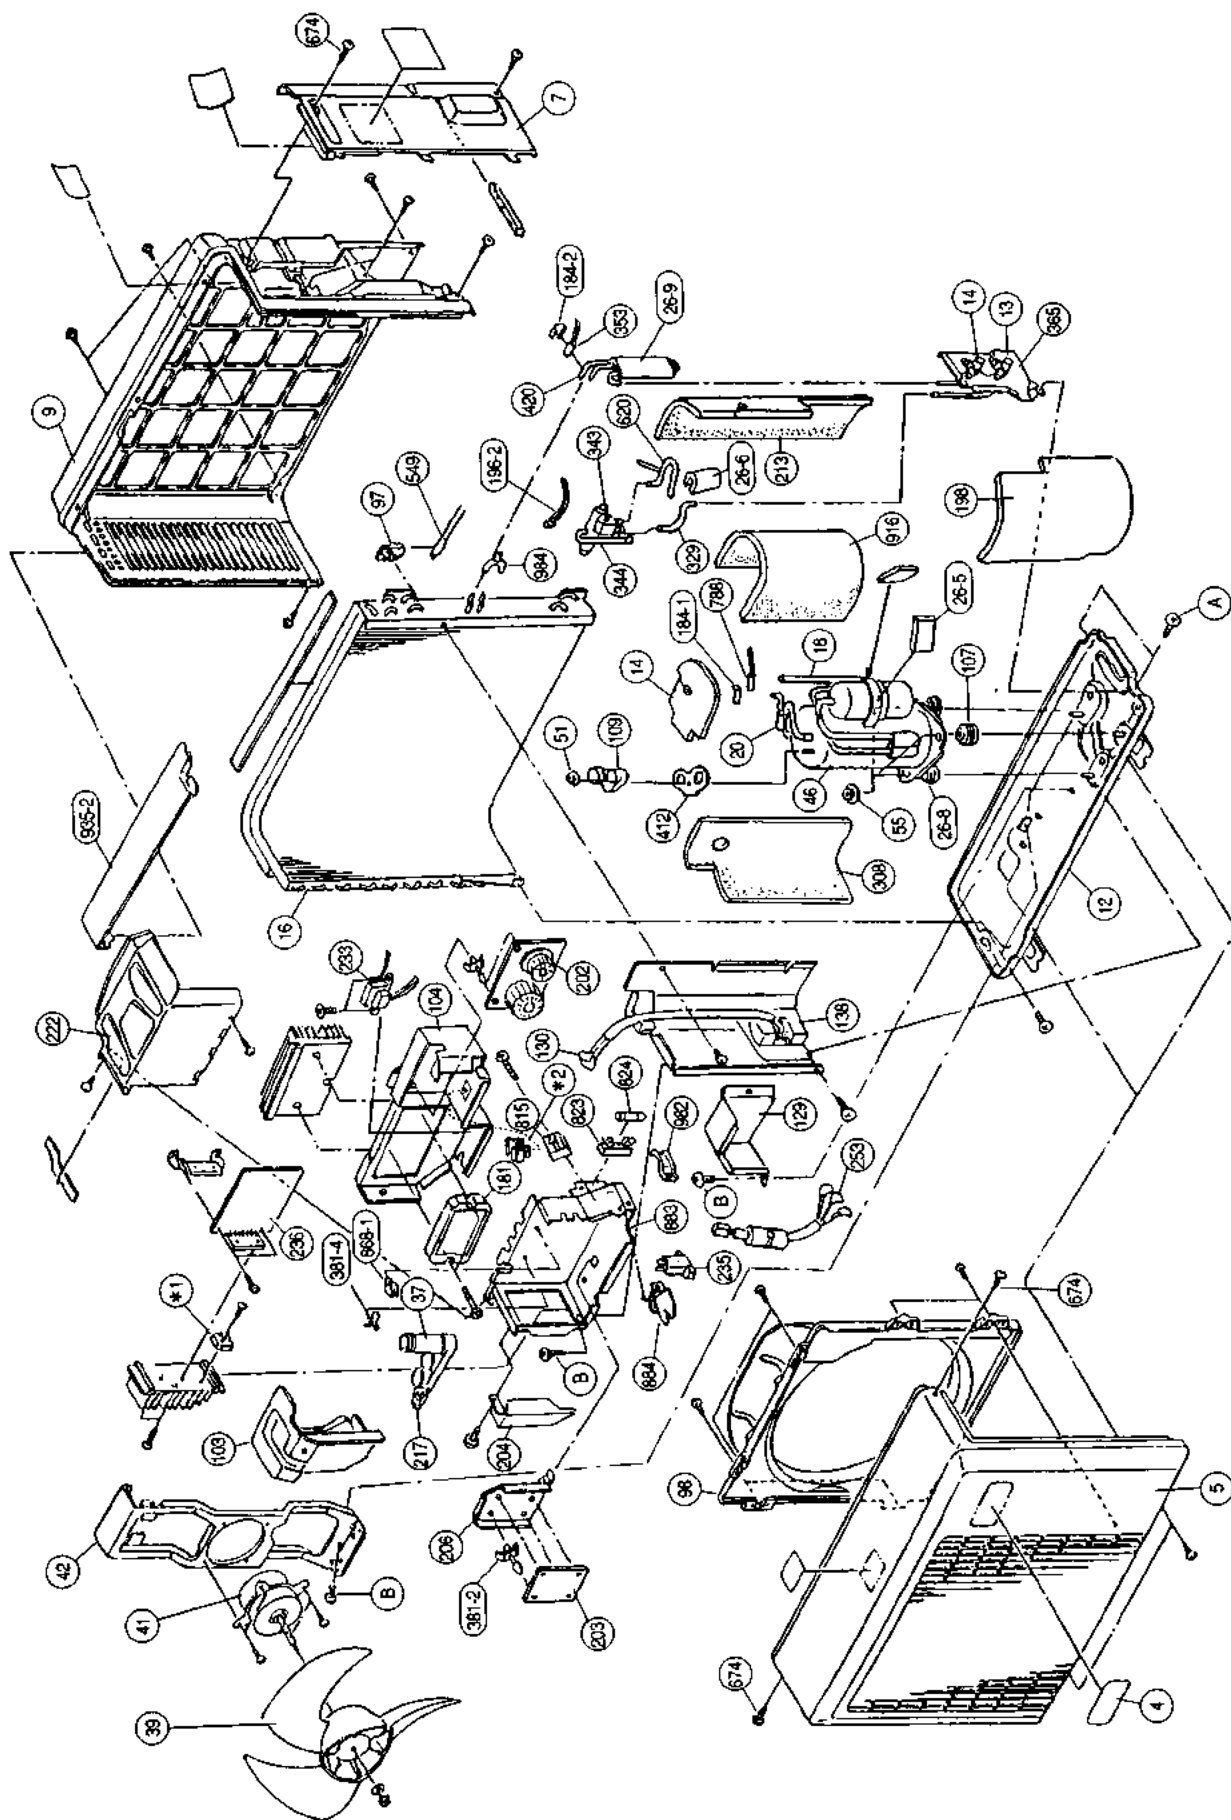

PARTS LIST

When you order parts, please make a photocopy of this page and fill the number of the parts in the "Order" column.

INDOOR UNIT [ASY13PNA-W]

Ref. No.	Description	Part No.	Ord. Q'ty	Ref. No.	Description	Part No.	Ord. Q'ty
61	Decoration Plate	9307600012		234-2	Thermistor Assy	9702039011	
63	Front Panel Assy	9306817091		236	Controller PCB Assy	9702232016	
65	Flow Control Panel-Z	9306571016		268	Motor Cover-B	9306582012	
69	Louver-A	9306583019		281	Clamp Metal (Pipe)	9306607012	
74	Filter	9306601010		323	Louver-B	9306584016	
89	Casing Fixture	9307018008		401	Wall Hook Bracket	9306588014	
92	Link Plate	9306577018		440	Flow Control Panel-U	9306570019	
93	Link-A	9306573010		557	Diffuser Spring	9306611019	
94	Link-B	9306574017		652-1	Thermistor Holder Pipe	313714262805	
95	Link-C	9306575014		688	Screw (w/Square Washer)	313681304205	
96	Link-D	9306576011		736	Operation Panel	9306620011	
102	Link Spring	9306610012		759	Intake Grille	9306598013	
108	Base	9306566012		764	Drain Cap Assy	9304150008	
109	Casing	9306569013		767-1	Bottom Cover-A	9306567019	
127	Drain Hose Assy	9305550029		777	Intake Grille Clamp	9306755010	
133	Evaporator Cover	9306606015		815	Terminal	9701955077	
146	Evaporator Assy	9307449017		873	Lamp Cover	9306593018	
151-1	Control Box	9306590024		874-1	Control Box Cover, Plastic	9306591014	
151-2	Control Box-Metal	9306594015		874-2	Control Box Cover, Metal	9306595012	
158	Connecting Pipe Assy	9306669010		876-1	Step Motor	9305780006	
164	Fan Motor Assy-IN	9306829018		876-2	Step Motor	9305892006	
169	Cross-Flow Fan Assy	9305435012		960	Diffuser	9306572013	
178-1	Motor Cushion-A	9306751012		962-1	Guard Holder-L	9307229015	
178-2	Motor Cushion-B	9306580018		962-2	Guard Holder-R	9307228018	
184	Thermistor Spring	313104262701		963	Fan Guard	9305751020	
185	Wire Clamp	9306592011		①	Sheet-A	9307661006	
188	Power Cord Assy	9702604011		B	Screw (w/Spring Washer)	0700179013	
189	Shaft Holder-C Assy	9306528017					

OUTDOOR UNIT [AOY13PNA]

Ref. No.	Description	Part No.	Ord. Q'ty	Ref. No.	Description	Part No.	Ord. Q'ty
4	Emblem-Rear	9307602016		206	PCB Fixture	9307587016	
5	Cabinet Front Panel	9305525010		213	Noise Insulation-B	9307674006	
7	Connector Cover	9306119010		217	Capacitor Holder	9306036027	
9	Cabinet Rear Panel	9305526017		222	Shield Plate	9305788002	
12	Base Assy, Painted	9306118082		223	Noise Insulation-D	9307719004	
13	3-Way Valve	9306802011		233	Power Transformer EZ-030HSE-T	9701803026	
14	2-Way Valve	9306800017		235	Thermistor PTC912X24E400XR20	0000726016	
16	Condenser Assy	9307083006		236	Inverter PCB Assy	9702487010	
18	Suction Pipe	9307260001		253	Wire Assy (Connector)	9702608019	
20	Discharge Pipe Assy	9307259005		308	Noise Insulation-C	9307675003	
26-5	BR Sheet	9305039012		329	Coupling Pipe	9307263002	
26-6	BR Sheet	9305039029		343	Solenoid Coil	9359616085	
26-8	BR Sheet	9305498093		344	4-Way Valve	313947302811	
26-9	BR Sheet	9305039067		353	Thermistor Assy	9701409020	
37	Cap. Elec. 420V 1300μF	9702609016		365	Bracket (Valve)	9306748012	
39	Propeller Fan	9305538003		381-2	Locking Spacer KGLS-8S	0600035020	
41	Fan Motor Assy-Out	9300834285		381-4	Locking Spacer KGFS-6S	0600118075	
42	Bracket (Motor)	9305536023		412	Terminal Gasket	9351051013	
46	Compressor Assy	9307311017		420	Capillary Assy	9307125003	
51	Special Nut M5	9300301015		549	Thermistor Assy-Outer	9702606015	
55	Special Nut M8	313252257701		620	Inlet Pipe Assy	9307262005	
97	Thermistor Holder	9307274015		674	Screw, Coated	9305848010	
98	Fan Ring	9305581016		688	Screw (w/Square Washer)	313681304205	
103	Active Filter Cover	9307825019		788	Thermistor-Discharge	9701945023	
104	Active Filter Case	9307577017		815	Terminal HP-T3031-5-L	9306489038	
107	Rubber Seat-A	9351049010		823	Fuse Holder FH-153A	0500487011	
109	Terminal Cover	9303553008		824	Fuse TLC25A-250V	0600086039	
129	Coil Cover	9307581014		868-1	PCB Holder 1680-0-0-518-01	0600172107	
130	Choke Coil	9702607012		883	Inverter Case	9307568015	
138	Separate Wall Assy	9307573019		884	Bracket (Thermistor)	9307582011	
181	IPM (Active Filter)ACTPM-EU	9702612016		916	Noise Insulation-G	9307676000	
184-1	Thermo. Spring-A	313728262708		935-2	Reinforcement-B	9307685002	
184-2	Therm. Spring	9300089012		982	Cord Clamp	9307271014	
196-2	Clamp SKB-3MC	9305335008		984	U-Pipe (Y)	9305523009	
198	Noise Insulation-A	9307673009		A	Screw (w/Washer)	9357297002	
202	Filter PCB Assembly	9702493011		B	Screw (w/Spring Washer)	0700179013	
203	Active Filter PCB Assy	9702490010		#1.	IC S25VB60	0100122022	
204	Heat Sink Cover	9305534005		#2.	PCB Holder 2196-0-0-016-01	0600172206	

Note : Always use specified screws, since Ref. No.688, A and B are screws for the earth.

Ref. No.688 : Machine screw (with square washer & spring washer) M4 x P0.7 x L10, plating thickness 5μ or more

A : Tapping screw (with inner clip washer) M4 x L10, plating thickness 5μ or more

B : Machine screw (with spring washer) M4 x P0.7 x L10, plating thickness 5μ or more

[INDOOR P.C.B.]
INVERTER PCB ASSEMBLY (Ref. No. 236)

When you order parts, please make a photocopy of this page
and fill the number of the parts in the "Order" column.

Ref. No.	Description	Part No.	Ord. Q'ty	Ref. No.	Description	Part No.	Ord. Q'ty
IC1	IC μ PD78P018FCW-018	9702120078		R68, 84	Res. 390 $\Omega \pm 5\%$	0200212647	
IC2	IC μ PC1805AHF	0100008036		R69	Res. 33k $\Omega \pm 1\%$	0200279732	
IC3	IC HI2002	9701384020		R70	Res. 2.2k $\Omega \pm 1\%$	0200279176	
IC4	IC PS2561-1-VL	0000050456		R71	Res. 22.1k $\Omega \pm 1\%$	0200279664	
IC5	IC NM93C46M8-X	0101622026		R72	Res. 33.2k $\Omega \pm 1\%$	0200279749	
IC6	IC 3AA13	0101650104		R87	Res. 22k $\Omega \pm 5\%$	0200213095	
IC7	IC 3AC13	0101650111		R91	Res. 10k $\Omega \pm 1\%$	0200279497	
IC8	IC μ PC494C	0101582030		R94	Res. 3.9k $\Omega \pm 5\%$	0200212883	
IC9	IC μ PC339G2E2	0101081045		C1	Cap. Plastic 0.22 μ F	0300304099	
IC10, 11	Transistor Array M54523FP	0100013023		C2, 4	Cap. Ceramic 1000 pF	0300209073	
IC12	IC PST600CMTR	0101461120		C5	Cap. Elec. 450V 100 μ F	0300256039	
IC13	IC μ PC1093J-T	0101547039		C6	Cap. Ceramic 0.01 μ F	0300209127	
IC15	IC MA3830	0101774169		C7	Cap. Ceramic 2kV 1000 pF	0301236351	
IC17	IC μ PC358G2	0100455014		C8, 9	Cap. Plastic 50V 0.01 μ F	0300576113	
Q1	Xstr 2SA854S	0000780094		C10	Cap. Plastic 50V 1000 pF	0300576090	
Q3, 4	Xstr DTC124EK	0000517034		C11, 36, 43, 46	Cap. Elec. 25V 10 μ F	0300099339	
Q5	Xstr 2SA1388Y	0000595124		C12, 16	Cap. Elec. 25V 680 μ F	0301196488	
D1	Diode D3S860	0000689045		C13	Cap. Elec. 63V 1000 μ F	0300255254	
D2, 3, 12, 13, 21	Diode DAN202K	0000684019		C14, 20, 21, 23,	Cap. Ceramic 50V 1000 pF	0300308509	
D4, 10, 19	Diode DA226U	0000625036		26, 38, 42, 45,			
D5, 6, 8	Diode D2FL20U	0000906500		64, 66, 69~72			
D7, 17	Diode D1F60	0000208024		C15	Cap. Ceramic 20 pF	0300212547	
D9, 11	Diode S3L20U	0000876506		C17, 27, 28, 37,	Cap. Ceramic 25V 0.1 μ F	0300266748	
R1	Res. Cement 3.3 $\Omega \pm 10\%$	0200153148		44, 47, 51, 52,			
R2	Res. 430 $\Omega \pm 5\%$	0200731650		54, 55, 73, 75			
R3	Res. Carbon 1/2W 1.2M $\Omega \pm 5\%$	0200011141		C18, 22, 58	Cap. Elec. 16V 100 μ F	0300099377	
R4	Res. 100k $\Omega \pm 5\%$	0200213255		C19	Cap. Elec. 50V 680 μ F	0301196815	
R5, 6	Res. Metal 75 $\Omega \pm 5\%$	0201167713		C29~34, 25, 40	Cap. Ceramic 50V 0.01 μ F	0300323113	
R7, 32	Res. 10 $\Omega \pm 5\%$	0200731261		C61	Cap. Plastic 50V 0.033 μ F	0300576199	
R8	Res. 1k $\Omega \pm 1\%$	0200010014		T1	Switching Transformer	9702351014	
R9	Res. 15k $\Omega \pm 1\%$	0200022185			ETS29AF1K8AC		
R10	Res. Metal 330 $\Omega \pm 5\%$	0201106396		L1	EMI Filter	0400165088	
R11	Res. 4.7k $\Omega \pm 5\%$	0200708904		L2	Choke Coil	0400112662	
R12	Res. 1k $\Omega \pm 5\%$	0200708744		F1	Fuse	0600222512	
				F2	Fuse	0600078089	
R14	Res. 20k $\Omega \pm 5\%$	0200213088		FH1, 2	Fuse Holder	0500158072	
R15	Res. 100 $\Omega \pm 5\%$	0200731506		K1	Relay	0701067015	
R16~18	Res. 4.7k $\Omega \pm 5\%$	0200731902		SW1	Switch, Push	0700891017	
R19~22, 37, 41	Res. 1k $\Omega \pm 5\%$	0200212746		VA1	Varistor	0000515139	
43, 56~61, 73,				HT1	Heat Sink	0701939022	
75, 80, 95				BZ1	Buzzer	0701298013	
R23~25	Res. 49.9k $\Omega \pm 1\%$	0200279824		X1	Ceramic Resonator	9701261017	
R26	Res. 1k $\Omega \pm 5\%$	0201107454			EF0EC8384T4		
R27	Res. 120k $\Omega \pm 1\%$	0200280059		CN1	Plug, PCB	0501052591	
R28, 74	Res. 7.87k $\Omega \pm 1\%$	0200279442					
R29	Res. 6.8k $\Omega \pm 5\%$	0200708942		CN3	Plug, PCB	0501052546	
R30	Res. 12.4k $\Omega \pm 1\%$	0200279541		CN4	Plug, PCB	0500011308	
R34	Res. Metal 0.33 $\Omega \pm 5\%$	0201106037		CN6	Wire w/Connector	9702010010	
R35, 39, 44, 49~	Res. 10k $\Omega \pm 5\%$	0200213019			2-173985-6 L=230		
55, 66, 79, 85,				CN7	Plug, PCB	0500940011	
93				CN8	Thermistor	0700801078	
R36, 76	Res. 15.4k $\Omega \pm 1\%$	0200279565		CN9	Thermistor	0702039011	
R38	Res. 31.6k $\Omega \pm 1\%$	0201114490		CN10	Plug, PCB	0500951048	
R40, 62	Res. 47 $\Omega \pm 5\%$	0200212425		W1	Wire w/Terminal	0701898015	
R42	Res. 1.2k $\Omega \pm 5\%$	0200708768		W2	Wire w/Terminal	0701898022	
R46	Res. 1k $\Omega \pm 5\%$	0200731742		W3	Wire w/Terminal	0701660018	
R63~65, 86	Res. 330 $\Omega \pm 5\%$	0200212623					

When you order parts, please make a photocopy of this page and fill the number of the parts in the "Order" column.

INDICATOR PCB ASSEMBLY (Ref. No. 385)

Ref. No.	Description	Part No.	Ord. Q'ty
D101	Diode SLR-325VC RED	0000813259	
D102	Diode SLR-325MC GRN	0000813242	
D103	Diode SLR-325DC ORG	0000813235	
C101	Cap. Ceramic 25V 0.1 μ F	0300266748	
C102	Cap. Elec. 25V 10 μ F	0300099339	
X101	Remote Control Amplifier SBX1610-22	0100417050	

[OUTDOOR P.C.B.]

CONTROLLER PCB ASSEMBLY (Ref. No. 236)




Ref. No.	Description	Part No.	Ord. Q'ty	Ref. No.	Description	Part No.	Ord. Q'ty
IC1	IC MB89P857P-G-SH-166	9702858014		C4	Cap. Elec. PF 25V 220 μ F	0301197553	
IC1	IC MB89855RP-G-196-SH	9702488017		C5, 11~13, 31, 60	Cap. Elec. PF 16V 220 μ F	0301197492	
IC4	IC μ PA2003GR	0100028041		C6	Cap. Elec. PR 16V 100 μ F	0301192251	
IC5	IC PST600DM	0101461137		C8, 51, 52	Cap. Ceramic 50V 0.022 μ F	0300311745	
IC6, 7	Photocoupler PS2561-I-V L	0000050456		C14	Cap. Elec. PF 16V 680 μ F	0301196358	
IC8	IC TA7805S	0101597010		C16, 19	Cap. Elec. PR 50V 4.7 μ F	0301192534	
IC101	Power Transistor Module MP6502-LB	0000062114		C17, 18, 34, 50	Cap. Ceramic 50V 0.01 μ F	0300311738	
H-IC1	Hybrid IC HU2001	9701651016		C26~29	Cap. Elec. PF 50V 47 μ F	0301197102	
H-IC2	Hybrid IC HU0001	9701348015		C33	Cap. Plastic 50V 0.01 μ F	0300169254	
H-IC3	Hybrid IC HU0002	9701348022		C65~68, 88, 89	Cap. Ceramic 50V 0.1 μ F	0300311752	
Q1	Transistor 2SC4236	0000164047		C80	Cap. Plastic 440V 2.5 μ F	9702104023	
D1~8	Diode D1FL20U	0000746519		C101, 102	Cap. Ceramic 0.015 μ F	0301052081	
D10	Diode RDS. 6ES B2	0000520041		C100, 103	Cap. Plastic 1 μ F	0300304136	
D28	Diode TLR124	0000467025		C104	Cap. Plastic 0.22 μ F	9702551015	
D30~32, 60	Diode DA226U	0000525036		F1	Fuse ATLCR 15A-250V	0600036027	
R1, 101	Res. Carbon 2W 220 Ω $\pm$ 5%	0200241098		F2	Fuse BET 3. 15A-250V	0600222512	
R2	Res. Metal Oxide 2W 1k Ω $\pm$ 5%	0200045092			Fuse Holder PFC5000-0502	0500158072	
R3	Res. 1/2W 100 Ω $\pm$ 5%	0200731506		T1	Switching Transformer ETS28KK1D8A	9702333010	
R4	Res. 1/4W 330 Ω $\pm$ 5%	0200708621		CT1	Transformer CT-1A	9702334017	
R5, 50, 51, 62, 64, 66, 81~89, 93~98	Res. 1/10W 10k Ω $\pm$ 5%	0200213019		K2	Relay GSS-1	9701925018	
R30	Res. 1/4W 20 Ω $\pm$ 1%	0201092309		K3, 4	Relay GSN-1A	9701566013	
R31	Res. 1/4W 220 Ω $\pm$ 1%	0200005300		K101	Relay G4A-1A-P-PS	9701717019	
R32	Res. 1/10W 100 Ω $\pm$ 1%	0200278452		L1	Coil FK-140M-5020HR	9702335014	
R33, 39	Res. 1/10W 47k Ω $\pm$ 5%	0200213170		CR1, 2	CR Absorber RPEL-121204	9701125012	
R34, 40, 52, 53, 72	Res. 1/10W 1k Ω $\pm$ 5%	0200212746		X1	Ceramic Resonator EFO-EC3004T4	0400004011	
R37	Res. 1/4W 130 Ω $\pm$ 1%	0200005126		CN10	Plug PCB B7P-VH-B	0500011117	
R38	Res. 1/4W 154 Ω $\pm$ 1%	0200005195		CN20	Wire P7 L=240	9702643010	
R60	Res. 1/10W 1.5k Ω $\pm$ 1%	0200273091		CN21	Wire P6 L=120	9702635015	
R61	Res. 1/10W 3.74k Ω $\pm$ 1%	0201113561		CN30	Plug PCB 82P3-VH-B-C	0500011773	
R63	Res. 1/10W 6.65k Ω $\pm$ 1%	0201113806		W1	Wire BLK L=220	9702629014	
R65	Res. 1/10W 56k Ω $\pm$ 1%	0200279855		W2	Wire WHIT L=170	9702630010	
R67	Res. 1/10W 38.3k Ω $\pm$ 1%	0201114575		W3	Wire GRN L=140	9702627010	
R68	Res. 1/10W 22k Ω $\pm$ 5%	0200213095		W4	Wire Assy RED L=195	9701703036	
R73	Res. 1/10W 82k Ω $\pm$ 5%	0200213231		W5	Wire ORG L=310	9702631017	
R80	Res. 1/10W 2.2k Ω $\pm$ 5%	0200212821		W6	Wire GRY L=250	9702632014	
R102, 103	Res. Cement 5W 0.3 Ω $\pm$ 5%	0200207117		W7, 8	Wire ORG L=160	9702644017	
VR1	Semi-fixed KVSF687A 82k Ω	0200947013		W12	Wire YEL L=290	9702637019	
C1	Cap. Ceramic 2kV 220pF	0301236276		W13	Wire BLU L=190	9702636012	
C2, 30, 32	Cap. Plastic 50V 0.047 μ F	0300169339		W24, 25	Wire P3 L=320	9702642013	
C3	Cap. Elec. PF 16V 100 μ F	0301197454		W103, 104, 105, 105, 106	Wire Assy P3 L=110	9701436026	
					Wire SN-Plated L=7.5mm	9701076017	

[INDOOR P.C.B.]
 FILTER PCB ASSEMBLY (Ref. No. 204)

When you order parts, please make a photocopy of this page
 and fill the number of the parts in the "Order" column.

Ref. No.	Description	Part No.	Ord. Q'ty	Ref. No.	Description	Part No.	Ord. Q'ty
IC405	IPM (Active Filter) ACTP-EU	9702612016		CA202	Plug. PCB B2P3-VH-8-Y	0500011827	
C201	Cap. Plastic 1 μ F	0300304136		W201	Wire WHT L=190	9702639013	
SA201	Arrester RA-302M-V7-F	0600280147		W202	Wire BLK L=210	9702640019	
VA201.202	Varistor ERZ-V10V471CS	0000515139		W203	Wire GRN L=170	9702628017	
TM201.202	Plug Contact 86028	3500536016		W206.207	Wire P3 L=430	9702626013	
L201	Coil FK-150M-3320HR	9702610012		JM200	Wire SN-Plated L=10mm	9700025016	
L202	Coil SKC-4019	9702611019					

STANDARD ACCESSORIES

Name and shape	Part No.
Wall hook bracket 	9306588014
Wall cap-B 	313714296205
Remote control unit 	9307113017
Remocon holder case 	9305642014
Battery (penlight) 	313187358304
Cloth tape 	9304232001
Seal-A 	9304536000
Tapping screw (Big) ($\phi 4 \times 25$) 	0700076046
Tapping screw (Small) ($\phi 3 \times 12$) 	301141533125
Allen wrench 	9351228019
Drain pipe (Including drain packing) 	9303029015

